

# MPC8544E PowerQUICC™ III Bring-up Guide

This document provides recommendations for new designs based on the MPC8544E PowerQUICC III family of integrated host communications processors (collectively referred to throughout this document as MPC8544E):

- MPC8544E
- MPC8544

This document may also be useful in debugging newly designed systems by highlighting those aspects of a design that merit special attention during initial system startup.

For updates to this document, refer to the website listed on the back cover of this document.

## Contents

1. Introduction .....	2
2. Power .....	4
3. Power-on Reset and Reset Configurations .....	9
4. Device Pins .....	12
5. Clocks .....	52
6. DDR Interface .....	54
7. Debug and Test Interface .....	55
8. DMA Interface .....	56
9. DUART Interface .....	56
10. Ethernet Management Interface .....	57
11. eTSEC Interface .....	57
12. I2C Interface .....	58
13. JTAG Interface .....	58
14. Local Bus Interface .....	62
15. PCI Interface .....	63
16. PIC Interface .....	64
17. SerDes Interface .....	65
18. System Control .....	66
19. Spare Configuration Pins .....	67
20. Power and Ground Signals .....	67
21. Documentation History .....	68

# 1 Introduction

This section outlines recommendations to simplify the first phase of design. Before designing a system with a MPC8544E device, it is recommended that the designer be familiar with the available documentation, software, models, and tools.

## 1.1 MPC8544E Overview

This section provides a high-level overview of MPC8544E features. [Figure 1](#) shows the major functional units within the device.

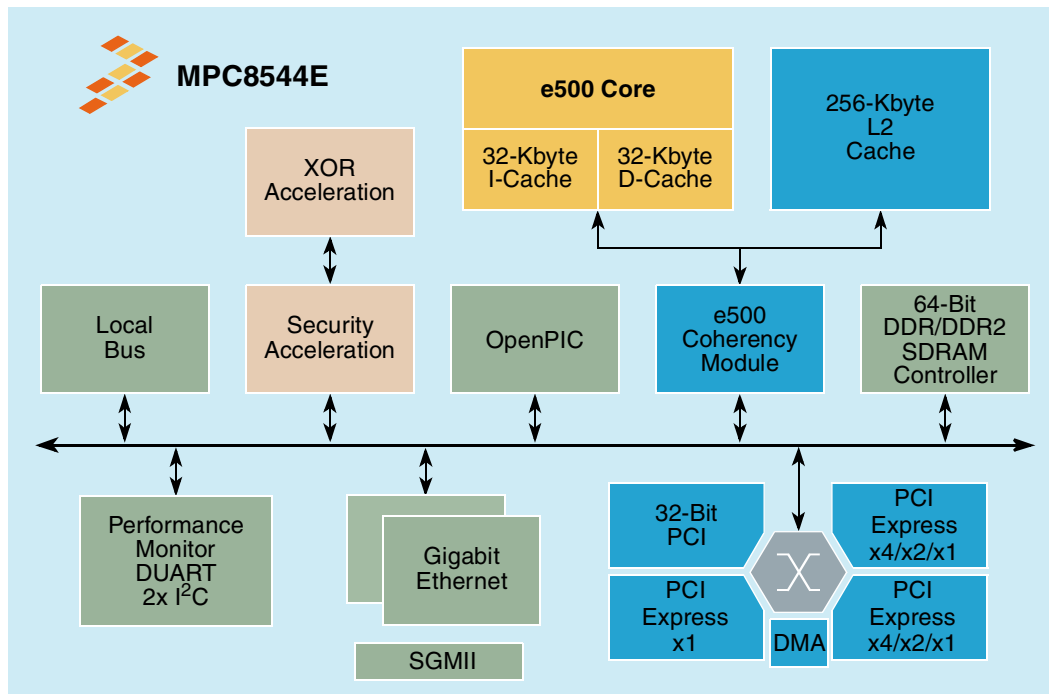


Figure 1. MPC8544E Block Diagram

## 1.2 References

- Collateral
  - *MPC8544E PowerQUICC III™ Integrated Host Processor Family Reference Manual* (MPC8544ERM)
  - *Errata to MPC8544E PowerQUICC™ III Integrated Host Processor Family Reference Manual* (MPC8544ERMAD)
  - *Device Errata for the MPC8544E PowerQUICC™ III* (MPC8544ECE)
  - *MPC8544E PowerQUICC III™ Integrated Processor Hardware Specifications* (MPC8544EEC)

- *A Strategy for Routing the MPC8544E in a Six-Layer PCB*  
(AN3535)
- *PowerQUICC™ DDR2 SDRAM Controller Register Setting Considerations*  
(AN3369)
- *Programming the PowerQUICC™ III/PowerQUICC II Pro DDR SDRAM Controller*  
(AN2583)
- *Hardware and Layout Design Considerations for DDR Memory Interfaces*  
(AN2582)
- *Hardware and Layout Design Considerations for DDR2 SDRAM Memory Interfaces*  
(AN2910)
- Tools
  - Software
    - Boot sequencer generator tool (I2CBOOTSEQ)
    - UPM Programming tool (LBCUPMIBCG)
  - Hardware
    - Development System (MPC8544DS) including schematics, bill of materials, board errata list, User's Guide, and configuration guide
- Models
  - IBIS
  - BSDL
  - Flowtherm

### 1.3 Device Errata

The device errata document MPC8544ECE describes the latest fixes and work arounds for the MPC8544E. The errata document should be thoroughly researched prior to starting a design with the respective MPC8544E device.

### 1.4 Boot Sequencer Tool

The MPC8544E features the boot sequencer to allow configuration of any memory-mapped register before the completion of power-on reset (POR). The register data to be changed is stored in an I<sup>2</sup>C EEPROM. The MPC8544E requires a particular data format for register changes as outlined in the MPC8544ERM. The boot sequencer tool (I2CBOOTSEQ) is a C-code file. When compiled and given a sample data file, it will generate the appropriate raw data format as outlined in the MPC8544ERM. The file that is generated is an s-record file that can be used to program the EEPROM.

### 1.5 UPM Programming Tool

The UPM Programming Tool (LBCUPMIBCG) features a GUI for a user-friendly programming interface. It allows programming of all three of the MPC8544E's UPM machines. The GUI consists of a wave editor, a table editor, and a report generator. The user can edit the waveform directly or the RAM array directly.

At the end of programming, the report generator will print out the UPM RAM array that can be used in a C-program.

## 1.6 Available Training

Our third-party partners are part of an extensive Design Alliance Program. The current training partners can be found on our website under Design Alliance Program at [www.freescale.com/alliances](http://www.freescale.com/alliances).

Training material from past Smart Network Developer's Forums and Freescale Technology Forums are also available. These trainings modules are a valuable resource in understanding the MPC8544E. This material is also available at our website listed on the back cover of this document.

## 1.7 Product Revisions

Table 1 lists the Processor Version Register (PVR) and System Version Register (SVR) values for the various MPC8544E derivatives of silicon.

**Table 1. MPC8544E PowerQUICC III Product Revisions**

Device Number	Device Revision	e500 v2 Core Revision	Processor Version Register Value	System Version Register Value	Note
MPC8544E	1.0	2.1	0x8021_0021	0x803C_0110	With Security
MPC8544	1.0	2.1	0x8021_0021	0x8034_0110	Without Security
MPC8544E	1.1/1.1.1	2.2	0x8021_0022	0x803C_0111	With Security
MPC8544	1.1	2.2	0x8021_0022	0x8034_0111	Without Security

## 2 Power

This section provides design considerations for the power supplies and power sequencing. For information on AC and DC electrical specifications and thermal characteristics, refer to the MPC8544EEC Hardware Specification document.

### 2.1 Power Supplies

The MPC8544E has a core voltage  $V_{DD}$  and SerDes voltages  $SV_{DD}$  and  $XV_{DD}$  that operate at a lower voltage than the I/O voltages  $BV_{DD}$ ,  $GV_{DD}$ ,  $LV_{DD}$ ,  $OV_{DD}$ , and  $TV_{DD}$ . The core voltage, 1.0 V ( $\pm 5\%$ ), is supplied across  $V_{DD}$  and GND.

The I/O blocks are supplied with the following:

- 1.8 V ( $\pm 5\%$ ) or 2.5 V ( $\pm 5\%$ ) or 3.3 V ( $\pm 5\%$ ) across  $BV_{DD}$  and GND
- 1.8 V ( $\pm 5\%$ ) or 2.5 V ( $\pm 5\%$ ) across  $GV_{DD}$  and GND
- 2.5 V ( $\pm 5\%$ ) or 3.3 V ( $\pm 5\%$ ) across  $LV_{DD}$  and GND
- 3.3 V ( $\pm 5\%$ ) across  $OV_{DD}$  and GND
- 1.0 V ( $\pm 5\%$ ) across  $SV_{DD}$  and GND

- 2.5 V ( $\pm 5\%$ ) or 3.3 V ( $\pm 5\%$ ) across  $TV_{DD}$  and GND
- 1.0 V ( $\pm 5\%$ ) across  $XV_{DD}$  and GND

Both  $LV_{DD}$  and  $TV_{DD}$  are used to supply the eTSEC interfaces on the device:  $LV_{DD}$  manages eTSEC1, and  $TV_{DD}$  manages eTSEC3. For the respective eTSEC,  $LV_{DD}/TV_{DD}$

- 3.3 V or 2.5 V for GMII, MII, RMII, TBI, or FIFO modes of operation
- 2.5 V for RGMII or RTBI modes of operation

#### NOTE

eTSEC1 and/or eTSEC3 can be configured to operate in SGMII mode. Details are provided in the *MPC8544E PowerQUICC III™ Integrated Host Processor Family Reference Manual* (MPC8544ERM).

## 2.2 Power Consumption

Operating-mode power dissipation numbers (Typical) are provided in the MPC8544EEC Hardware Specification. Typical and Thermal numbers are provided to assist in the thermal design for the device. If the targeted junction temperature ( $T_J$ ) of the MPC8544E in the system is not one of these two temperatures, a linear extrapolation of these two TYPICAL dissipation values can be used to estimate the power dissipation at the targeted junction temperature.

The Maximum is intended to assist in the power supply design selection.

### 2.2.1 Low Power Modes Power Dissipation

A low-power mode estimates provided in [Table 2](#) for applications concerned about minimizing power consumption when the core is not active.

**Table 2. Power Dissipation Estimated For Low Power Modes**

Low Power Modes	Core/CCB Frequency			
	667/333 MHz	800/400 MHz	1000/400 MHz	1067/533 MHz
SLEEP	1.50 W	1.55 W	1.55 W	1.6 W
NAP	1.75 W	1.80 W	1.90 W	2.0 W
DOZE	2.20 W	2.35 W	2.6 W	2.7 W

#### NOTE

The Typical, Thermal, and Maximum power numbers are based on the power dissipation on the 1.0 V nominal  $V_{DD}$  supply only. Typical power dissipation estimates on the peripheral supplies ( $BV_{DD}$ ,  $GV_{DD}$ ,  $LV_{DD}$ ,  $OV_{DD}$ ,  $TV_{DD}$ , and  $XV_{DD}$ ) are provided in MPC8544EEC.

## 2.2.2 I/O Power Dissipation

Because I/O usage varies from design to design, power dissipation estimates for the I/O supplies are provided in [Table 3](#).

**Table 3. Estimated I/O Power Dissipation**

Interface	Parameters	1.0 V (XV <sub>DD</sub> )	1.8 V (GV <sub>DD</sub> )	2.5 V (B/G/LV <sub>DD</sub> )	3.3 V (B/L/OV <sub>DD</sub> )	Comments
DDR	333 MHz data	—	0.38 W	0.73 W	—	—
	400 MHz data	—	0.46 W	—	—	
	533 MHz data	—	0.60 W	—	—	
PCI Express	x4, 2.5 G-baud	0.36 W	—	—	—	—
PCI	32-bit, 66 MHz	—	—	—	0.07 W	Power per PCI port
	32-bit, 33 MHz	—	—	—	0.04 W	
Local bus	32-bit, 133 MHz	—	—	0.14 W	0.24 W	—
	32-bit, 66 MHz	—	—	0.07 W	0.13 W	
	32-bit, 33 MHz	—	—	0.04 W	0.07 W	
eTSEC (10/100/1000 Ethernet)	MII	—	—	—	0.01 W	Power per eTSEC used
	GMII	—	—	—	0.07 W	
	TBI	—	—	—	0.07 W	
	RGMII	—	—	0.04 W	—	
	RTBI	—	—	0.04 W	—	
eTSEC (packet FIFO)	8-bit, 200 MHz	—	—	0.11 W	—	Power per FIFO interface used
	8-bit, 155 MHz	—	—	0.08 W	—	

## 2.3 Power Sequencing

The device requires its power rails to be applied in a specific sequence in order to ensure proper device operation. Per MPC8544EEC, the requirements for power-up are as follows:

1. V<sub>DD</sub>, AV<sub>DD-n</sub>, BV<sub>DD</sub>, LV<sub>DD</sub>, OV<sub>DD</sub>, SV<sub>DD</sub>, TV<sub>DD</sub>, XV<sub>DD</sub>
2. GV<sub>DD</sub>

All supplies must be at their stable values within 50 ms.

Items on the same line have no ordering requirement with respect to one another. Items on separate lines must be ordered sequentially such that voltage rails on a previous step must reach 90% of their value before the voltage rails on the current step reach 10% of theirs.

The purpose of the sequence is to guarantee the state of the DDR signals at reset. In order to guarantee MCKE low during power-up (as should be *attempted* per the JEDEC JESD79-2C specification), the above sequencing for GV<sub>DD</sub> is required. If there is no concern about any of the DDR signals being in an indeterminate state during power-up, then the sequencing of GV<sub>DD</sub> is not required.

From a system standpoint, if any of the I/O power supplies ramp prior to the  $V_{DD}$  core supply, the I/Os associated with that I/O supply may drive a logic one or zero during power-up, and extra current may be drawn by the device.

## 2.4 PLL Power Supply Filtering

Each of the PLLs is provided with power through independent power supply pins ( $AV_{DD\_PLAT}$ ,  $AV_{DD\_CORE}$ ,  $AV_{DD\_PCI}$ ,  $AV_{DD\_LBIU}$ , and  $AV_{DD\_SRDS}$  respectively). Preferably these voltages will be derived directly from  $V_{DD}$  through a low-frequency filter scheme.

Although there are a number of ways to reliably provide power to the PLLs, the recommended solution is to provide independent filter circuits per PLL power supply as illustrated in Figure 2, one to each of the  $AV_{DD}$  pins. By providing independent filters to each PLL, the opportunity to cause noise injection from one PLL to the other is reduced. This circuit is intended to filter noise in the PLLs' resonant frequency range from a 500 kHz to 10 MHz range. If the PCI is run in synchronous mode, no filter is required for  $AV_{DD\_PCI}$ .


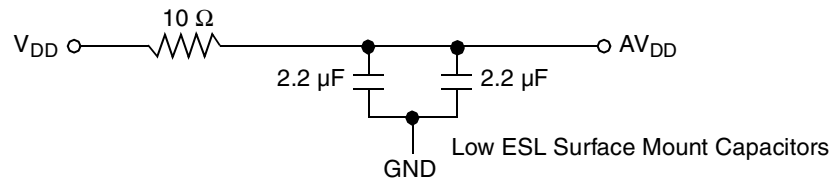


Figure 2. PLL Power Supply Filter Circuit

The  $AV_{DD\_SRDSn}$  signals provide power for the analog portions of the SerDes PLL. To ensure stability of the internal clock, the power supplied to the PLL is filtered using a circuit similar to the one shown in Figure 3. For maximum effectiveness, the filter circuit is placed as closely as possible to the  $AV_{DD\_SRDSn}$  balls to ensure it filters out as much noise as possible. The ground connection should be near the  $AV_{DD\_SRDSn}$  balls. The 0.003- $\mu\text{F}$  capacitor is closest to the balls, followed by the 1- $\mu\text{F}$  capacitor, and finally the 1- $\Omega$  resistor to the board supply plane. The capacitors are connected from  $AV_{DD\_SRDSn}$  to the ground plane. Use ceramic chip capacitors with the highest possible self-resonant frequency. If the SerDes is not used, a filter for  $AV_{DD\_SRDS}$  is not required.

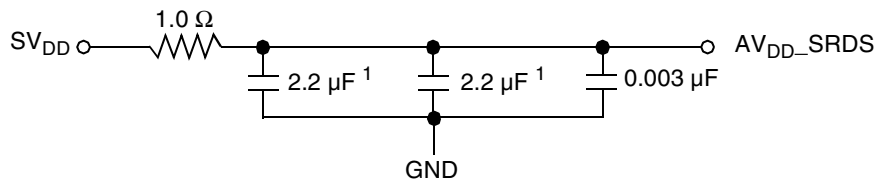

1. An 0805 sized capacitor is recommended for system initial bring-up.
2.  $AV_{DD\_SRDS}$  should be a filtered version of  $SV_{DD}$ .
3. Signals on the SerDes interface are fed from the  $XV_{DD}$  power plane.

Figure 3. SerDes PLL Power Supply Filter

Each circuit should be placed as close as possible to the specific  $AV_{DD}$  pin being supplied to minimize noise coupled from nearby circuits.

These filters are a necessary extension of the PLL circuitry and are to what the device is specified. Any deviation from the recommended filters are done at the customer's risk.

## 2.5 Power Supply Decoupling

The MPC8544E requires a clean, tightly regulated source of power. The system designer should place at least one decoupling capacitor at each  $V_{DD}$  and B/G/L/O/TV $_{DD}$  pin of the device. These decoupling capacitors should have a value of 0.01 or 0.1  $\mu\text{F}$  and receive their power from separate  $V_{DD}$ , B/G/L/O/TV $_{DD}$ , and GND power planes in the PCB, utilizing short traces to minimize inductance.

In addition, several bulk storage capacitors should be distributed around the PCB to feed the  $V_{DD}$  and B/G/L/O/TV $_{DD}$  planes in order to enable quick recharging of the smaller chip capacitors.

The capacitors should be placed as close as possible to the processor. The capacitors need to be selected to work well with the power-supply so as to be able to handle the MPC8544E's dynamic load requirements. The customer should work closely with their power-supply vendor to choose the correct value and type of capacitors for good and clean power.

If the SerDes is used, it requires a clean, tightly regulated source of power ( $SV_{DD}$  and  $XV_{DD}$ ) to ensure low jitter on transmit and reliable recovery of data in the receiver:

- The board should have at least 10 x 10-nF SMT ceramic chip capacitors as close as possible to the supply balls of the device.
- There should be a 1- $\mu\text{F}$  ceramic chip capacitor from each SerDes supply ( $SV_{DD}$  and  $XV_{DD}$ ) to the board ground plane on each side of the device.
- Between the device and any SerDes voltage regulator there should be a 10- $\mu\text{F}$ , low ESR SMT tantalum chip capacitor and a 100- $\mu\text{F}$ , low ESR SMT tantalum chip capacitor. This should be done for all SerDes supplies.

## 2.6 Power Supplies Checklist

Table 4 provides a summary power supply checklist for the designer.

**Table 4. Power Supplies Checklist**

Item	Description	Completed
1	All power supplies have a voltage tolerance no greater than 5% from the nominal value.	
2	eTSEC supplies are chosen according to the mode of operation used.	
3	Power supply selected is based on MAXIMUM power dissipation.	
4	Thermal design is based on TYPICAL power dissipation.	
5	Power-up sequence is less than 50 ms.	
6	Power sequencing is understood and based on whether or not latch-up or garbage data written to DDR is a concern.	
7	Recommended PLL filter circuit is applied to $AV_{DD\_PLAT}$ , $AV_{DD\_CORE}$ , and $AV_{DD\_LBIU}$ .	
8	If PCI is used in asynchronous mode, then the recommended PLL filter circuit is applied to $AV_{DD\_PCI}$ . However, If the PCI is used in synchronous mode, no filter is required for $AV_{DD\_PCI}$ .	
9	If SerDes is used, the recommended PLL filter circuit is applied to $AV_{DD\_SRDS}$ . However, If SerDes is not used, a filter for $AV_{DD\_SRDS}$ is not required.	
10	PLL filter circuits are placed as close to the respective $AV_{DD}$ pin as possible.	



**Table 4. Power Supplies Checklist**

Item	Description	Completed
11	Decoupling capacitors of 0.01 or 0.1 $\mu\text{F}$ are placed at each $V_{\text{DD}}$ , B/G/L/O/ $\text{TV}_{\text{DD}}$ pin.	
12	Bulk capacitors are placed on each $V_{\text{DD}}$ , B/G/L/O/ $\text{TV}_{\text{DD}}$ plane.	
13	If SerDes is used, the recommended decoupling for S/ $\text{XV}_{\text{DD}}$ is used.	

## 3 Power-on Reset and Reset Configurations

This section discusses reset configurations.

### 3.1 Configuration and Timing

Various device functions are initialized by sampling certain signals during the assertion of  $\overline{\text{HRESET}}$ . These power-on reset (POR) inputs are either pulled high or low during this period. While these pins are generally output pins during normal operation, they are treated as inputs while  $\overline{\text{HRESET}}$  is asserted.  $\overline{\text{HRESET}}$  must be asserted for a minimum on 100  $\mu\text{s}$ . When  $\overline{\text{HRESET}}$  de-asserts, the configuration pins are sampled and latched into registers, and the pins then take on their normal output circuit characteristics.

Most of the configuration pins have an internally gated 20 k $\Omega$  pull-up resistor, enabled only during  $\overline{\text{HRESET}}$ . For those configurations in which the default state is desired, no external pull-up is required. Otherwise, a 4.7 k $\Omega$  pull-down resistor is recommended to pull the configuration pin to a valid logic low level. In the case where a configuration pin has no default, 4.7 k $\Omega$  pull-up or pull-down resistors are recommended for appropriate configuration of the pin.

An alternative to using pull-up and pull-down resistors to configure the POR pins is to use a PLD or similar device that drives the configuration signals to the MPC8544E when  $\overline{\text{HRESET}}$  is asserted. The PLD must begin to drive these signals at least four SYSCLK cycles prior to the de-assertion of  $\overline{\text{HRESET}}$  (PLL configuration inputs must meet a 100  $\mu\text{s}$  set-up time to  $\overline{\text{HRESET}}$ ), hold their values for at least 2 SYSCLK cycles after the de-assertion of  $\overline{\text{HRESET}}$ , and then release the pins to high impedance afterward for normal device operation.

### 3.2 Configuration Settings

The following table summarizes the customer configurable device settings. Refer to the MPC8544ERM for a more detailed description of each configuration option.

**Table 5. User Configuration Options**

Configuration Type	Functional Pins	Comments
Device	$\overline{\text{DMA\_DACK}}[0:1]$	Refer to <a href="#">Table 7</a> Checklist for POR and Reset Configurations
CCB Clock PLL Ratio	LA[28:31]	There is no default value for this PLL ratio; these signals must be pulled to the desired value. Refer to <a href="#">Section 5.1</a> , “System PLL Ratio.”
e500 Core PLL Ratio	LBCTL, LALE, LGPL2/ $\overline{\text{LOE}}$ /LSDRAS	There is no default value for this PLL ratio; these signals must be pulled to the desired value. Refer to <a href="#">Section 5.2</a> , “e500 Core PLL Ratio.”

**Table 5. User Configuration Options (continued)**

Configuration Type	Functional Pins	Comments
SEC Frequency Ratio	$\overline{\text{LWE}}[0]$	Default: SEC in 3:1 (CCB CLK:SEC CLK). Refer to <a href="#">Section 5.3, "Security Controller PLL Ratio."</a>
Boot ROM Location	TSEC1_TXD[6:4]	Default: Local Bus GPCM (32-bit ROM)
Host/Agent	$\overline{\text{LWE}}[1:3]/\overline{\text{LBS}}[1:3]$	Default: MPC8544E acts as the host processor/root complex on all interfaces.
I/O Port Selection	TSEC3_TXD[6:4]	Default: All three PCI Express ports active and SGMII ports active.
CPU Boot	LA27	Default: e500 core is allowed to boot without waiting for configuration by an external master.
Boot Sequencer	LGPL3/ $\overline{\text{LSDCAS}}$ , LGPL5	Default: Boot sequencer is disabled. No I <sup>2</sup> C ROM is accessed.
DDR SDRAM Type	LGPL[0:1]	Default: DDR controller is configured for DDR2.
eTSEC1 Serial	TSEC1_TXD[2]	Default: eTSEC1 Ethernet interface uses parallel interface according to POR config inputs of eTSEC1 width and eTSEC1 protocol.
eTSEC3 Serial	TSEC3_TXD[2]	Default: eTSEC3 Ethernet interface uses parallel interface according to POR config inputs of eTSEC3 width and eTSEC3 protocol.
eTSEC1 Width	TSEC1_TX_ER	Default: eTSEC1 interface operates in standard width TBI, GMII, MII, or 8-bit FIFO mode.
eTSEC3 Width	TSEC3_TX_ER	Default: eTSEC3 Ethernet interface operates in standard TBI, GMII, MII, or 8-bit FIFO mode.
eTSEC1 Protocol	TSEC1_TXD[0:1]	Default: The eTSEC1 controller operates using the TBI protocol (or RTBI if configured in reduced mode).
eTSEC3 Protocol	TSEC3_TXD[0:1]	Default: The eTSEC3 controller operates using the TBI protocol (or RTBI if configured in reduced mode).
SGMII SerDes Reference Clock	TSEC3_TXD[3]	Default: SGMII SerDes expects a 125 MHz reference clock frequency.
PCI Clock Select	$\overline{\text{PCI1\_GNT}}[4]$	Default: Synchronous mode. SYSCLK is used as the clock for the PCI interface.
PCI Speed	$\overline{\text{PCI1\_GNT}}[3]$	Default: PCI frequency above 33 MHz.
PCI I/O Impedance	$\overline{\text{PCI1\_GNT}}[1]$	Default: 42 $\Omega$ I/O drivers are used on the PCI interface.
PCI Arbiter	$\overline{\text{PCI1\_GNT}}[2]$	Default: The on-chip PCI arbiter is enabled.
Memory Debug	MSRCID[0]	Default: Debug information from the DDR SDRAM controller is driven on the MSRCID and MDVAL signals.
DDR Debug	MSRCID[1]	Default: Debug information is not driven on ECC pins. ECC pins function in their normal mode.
General Purpose POR	LAD[0:31]	There is no default value for this general purpose POR.

### 3.3 Internal Test Modes

Several pins double as test mode enables. These test modes are for internal use only, and if enabled during reset could result in the MPC8544E not coming out of reset. [Table 6](#) lists these pins and how they should be addressed during the reset sequence.

**Table 6. Internal Test Mode Pins**

Pin Group	Pins	Guideline for Reset
DDR	TEST_IN	Connect directly to ground
	TEST_OUT	This pin may be left floating.
Debug	TRIG_OUT/READY/ QUIESCE	Because these pins have an internal pull-up enabled only at reset, they may be left floating if unconnected. Otherwise, they may need to be driven high (i.e., by a PLD), if the device to which they are connected does not release these pins to high impedance during reset.
	MSRCID[2]	
	MSRCID[3]	
	MSRCID[4]	
Design For Test	$\overline{\text{LSSD\_MODE}}$	These pins must be pulled to $\text{OV}_{\text{DD}}$ via a 100 $\Omega$ - 1 k $\Omega$ resistor.
	L1_TSTCLK	
	L2_TSTCLK	
	$\overline{\text{TEST\_SEL}}$	
eTSEC	EC_MDC	Because these pins have an internal pull-up enabled only at reset, they may be left floating if unconnected. Otherwise, they may need to be driven high (i.e., by a PLD), if the device to which they are connected does not release these pins to high impedance during reset.
	TSEC1_TXD[7]	
	TSEC1_TXD[3]	
	TSEC3_TXD[7]	
Power Management	ASLEEP	
System Control	$\overline{\text{HRESET\_REQ}}$	

### 3.4 Reset Checklist

[Table 7](#) provides a summary POR and reset checklist for the designer.

**Table 7. Checklist for POR and Reset Configurations**

Item	Description	Completed
1	$\overline{\text{HRESET}}$ is asserted for a minimum of 100 $\mu\text{s}$ .	
2	$\overline{\text{SRESET}}$ is asserted for a minimum of 3 SYSCLKs.	
3	$\overline{\text{DMA\_DACK}}[0:1]$ For proper state of these signals during reset, $\overline{\text{DMA\_DACK}}[1]$ must be pulled down to GND through a resistor. $\overline{\text{DMA\_DACK}}[0]$ can be pulled up or left without a resistor. However, if there is any device on the net which might pull down the value of the net at reset, a pull-up is needed on $\overline{\text{DMA\_DACK}}[0]$ .	
4	Configuration pins are either appropriately tied-off with a 4.7 k $\Omega$ resistor or driven by an external device (meeting their required setup and hold times).	

**Table 7. Checklist for POR and Reset Configurations (continued)**

Item	Description	Completed
5	PLL configurations are defined and meet the required set-up and hold times.	
6	Internal test mode pins are guaranteed not to be low during reset.	

## 4 Device Pins


This section discusses the recommended test points and provides a device pin map.

### 4.1 Recommended Test Points

For easier debug, it is recommended that the test points on the board include the following pins:

- CLK\_OUT (This helps to verify the CCB clock.)
- TRIG\_OUT (This helps to verify the end of the reset sequence.)
- ASLEEP (This helps to verify the end of the reset sequence.)
- SENSEVDD (This helps to verify power plane VDD.)
- SENSEVSS (This helps to verify ground plane VSS.)
- HRESET\_REQ (This helps to verify proper boot sequencer functions and reset requests.)



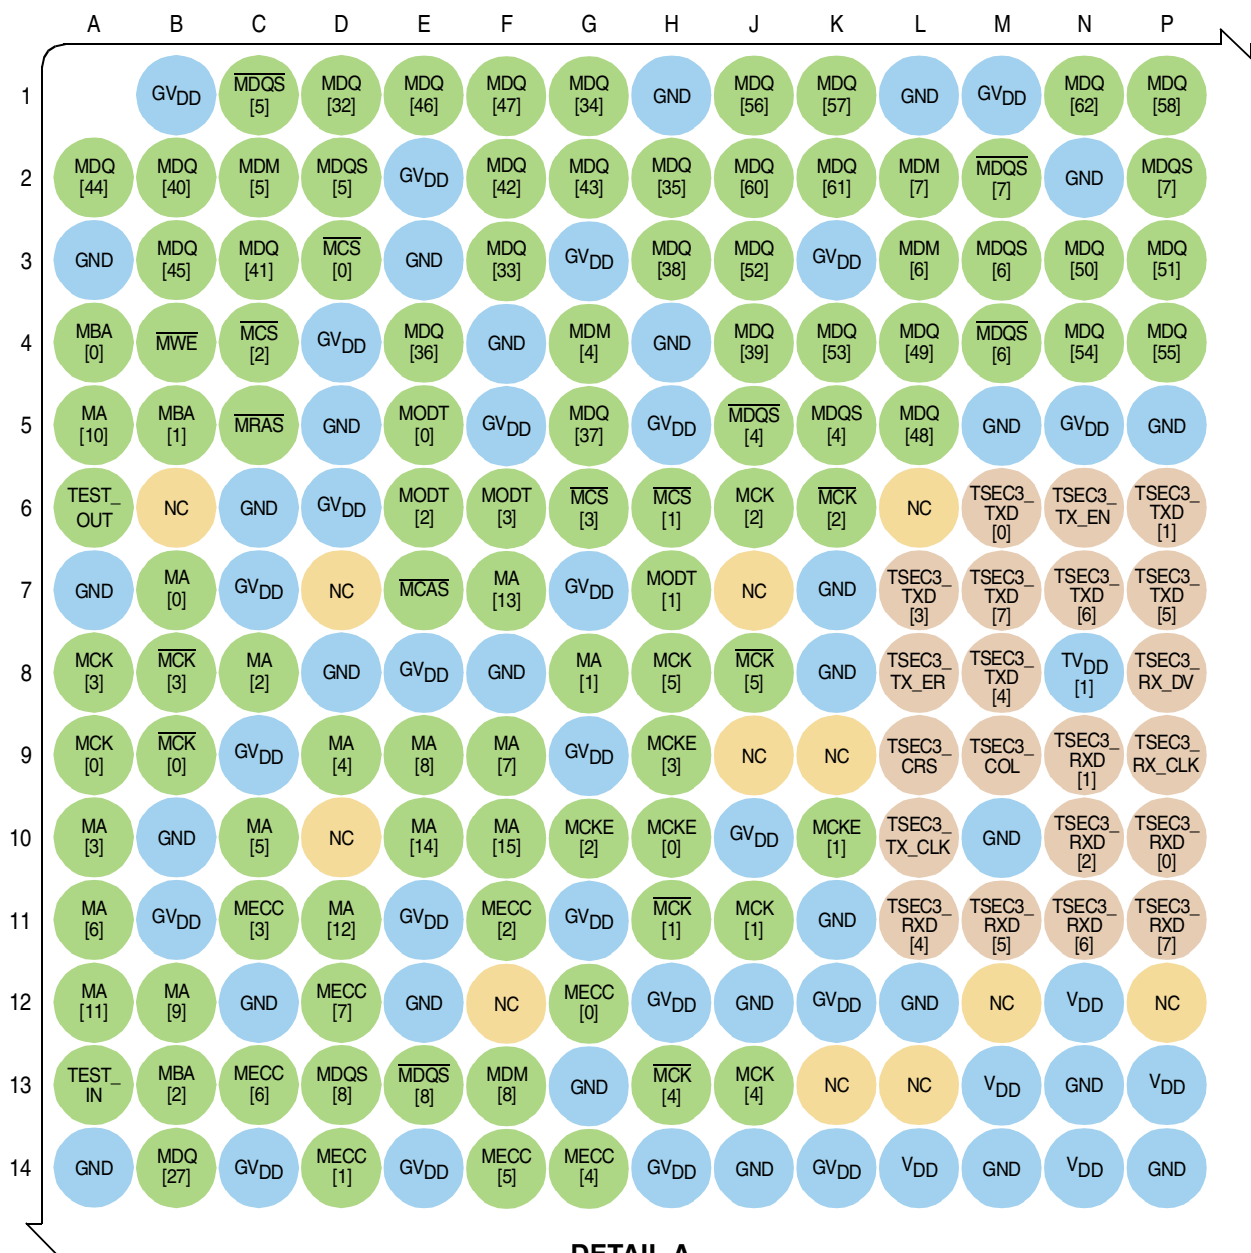

DETAIL A

Figure 5. MPC8544E Pin Map Detail A

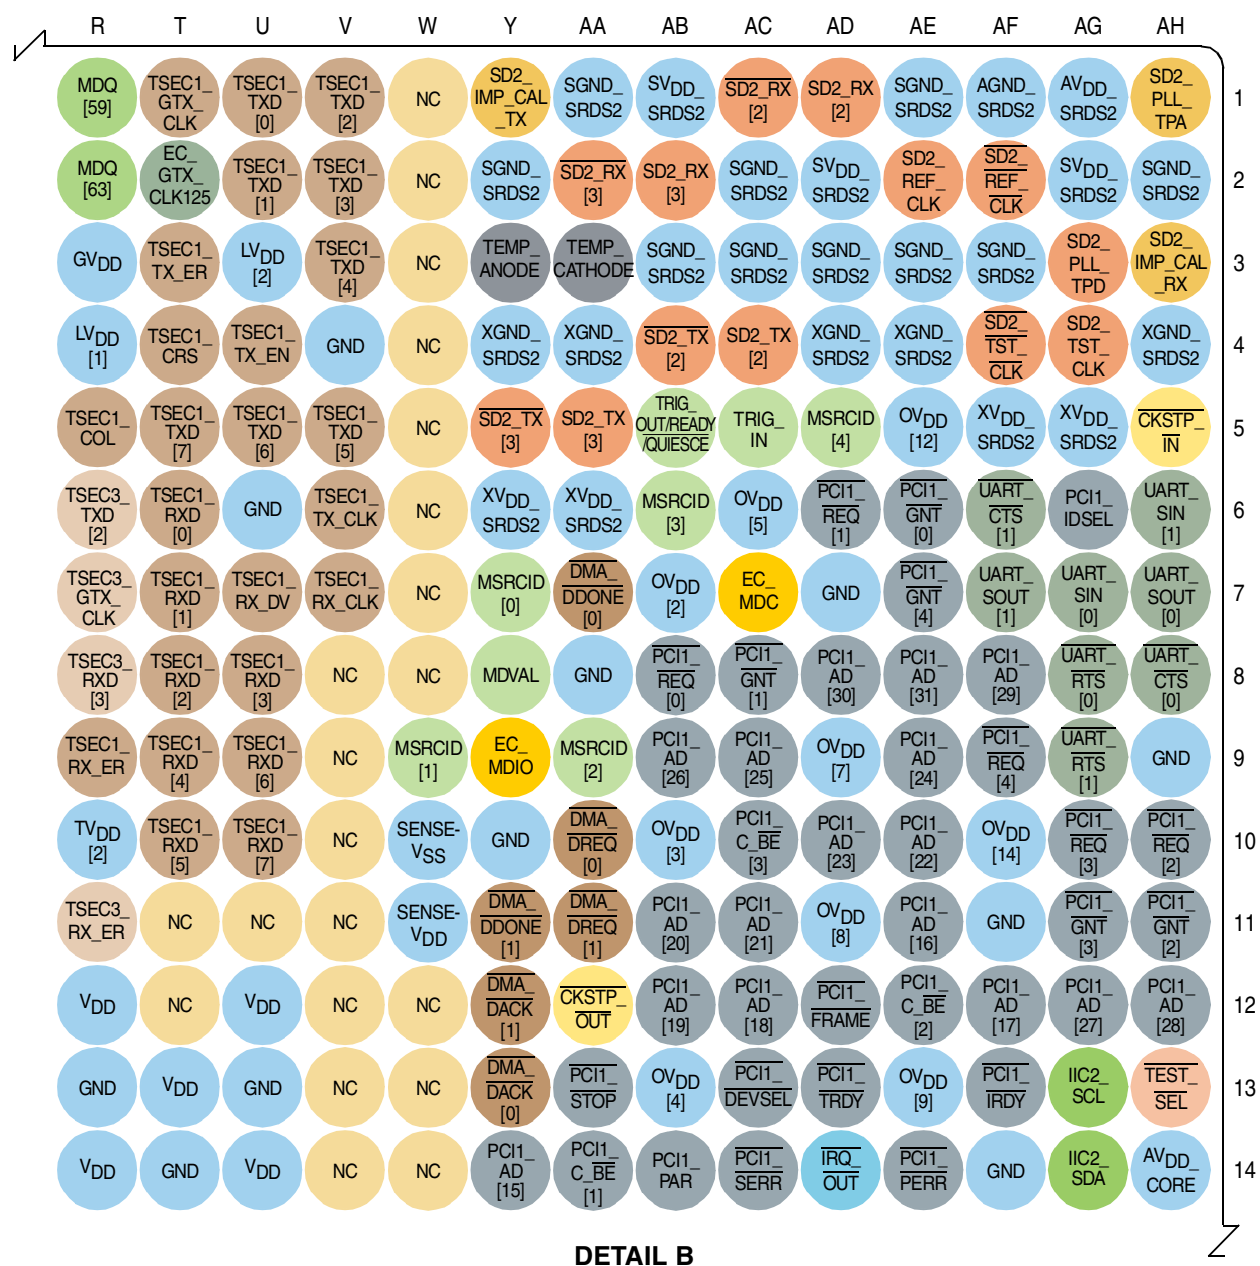


Figure 6. MPC8544E Pin Map Detail B

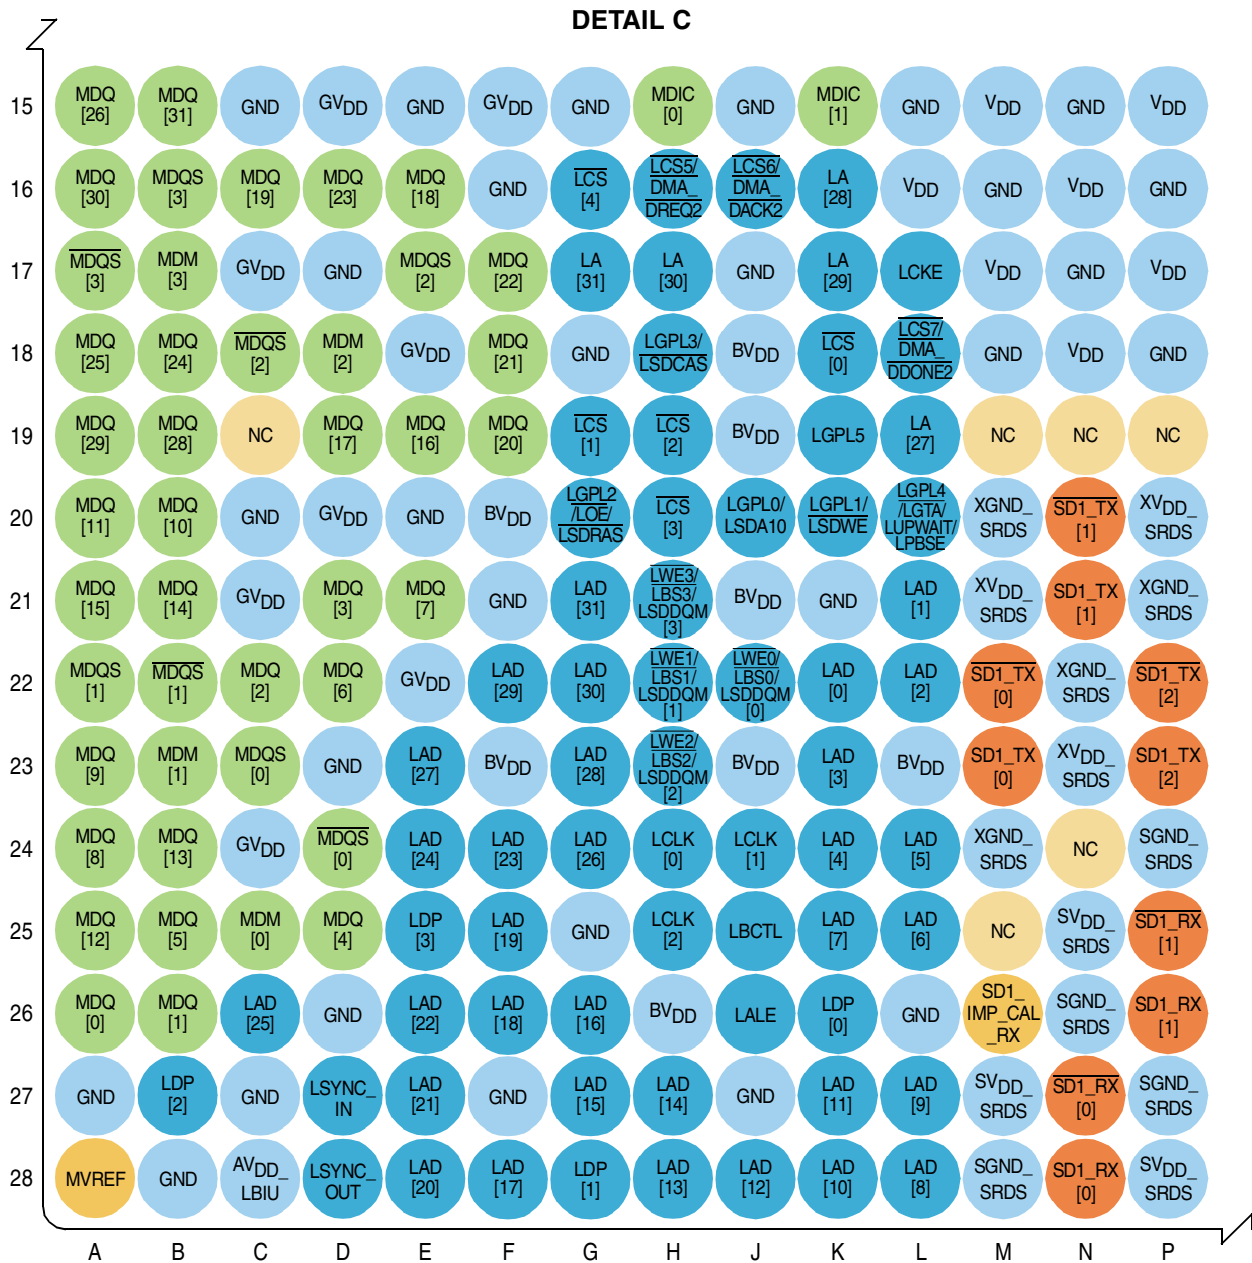


Figure 7. MPC8544E Pin Map Detail C



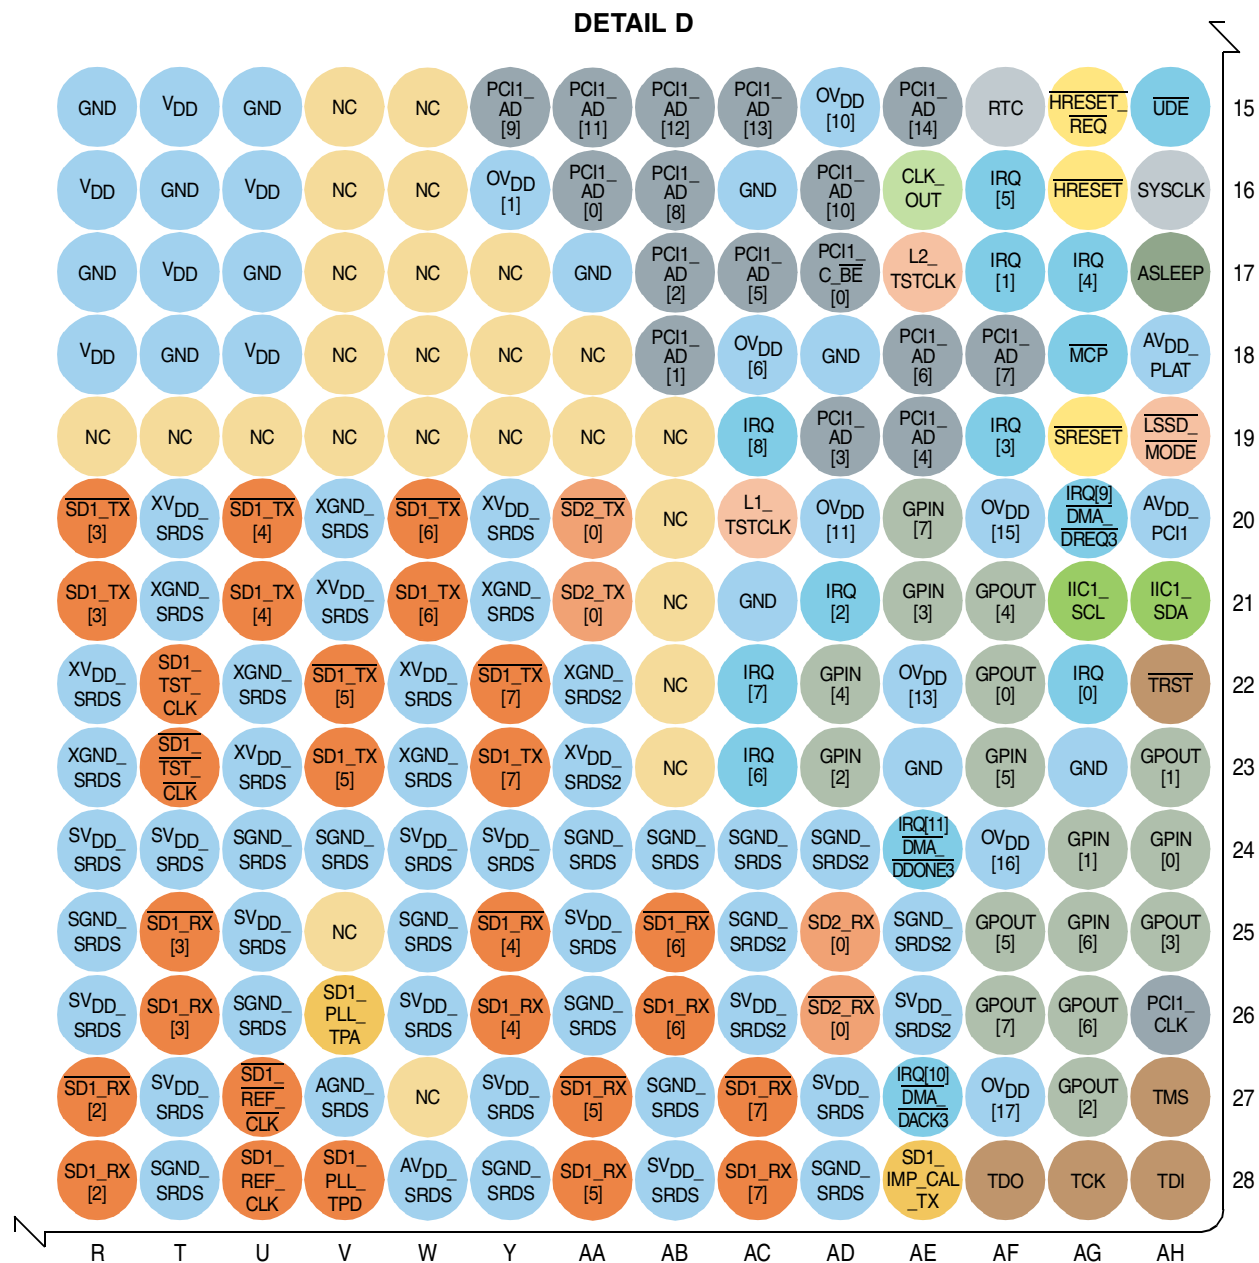


Figure 8. MPC8544E Pin Map Detail D

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	U	V	W	Y	AA	AB	AC	AD	AE	AF	AG	AH			
1	GVDD	MDO5 [5]	MDO [32]	MDO [46]	MDO [47]	MDO [34]	GND	MDO [56]	MDO [57]	GND	GVDD	MDO [62]	MDO [58]	MDO [59]	MDO [63]	TSEC1_TXD [0]	TSEC1_TXD [1]	TSEC1_TXD [2]	NC	SD2_IMP_CAL_TX	SGND_SRD2	SVDD_SRD2	SD2_RX [2]	SD2_RX [2]	SGND_SRD2	AGND_SRD2	AVDD_SRD2	SD2_PLL_TPA			
2	MDO [44]	MDO [40]	MDM [5]	MDO5 [5]	GVDD	MDO [42]	MDO [43]	MDO [35]	MDO [60]	MDO [61]	MDM [7]	MDO5 [7]	GND	MDO5 [7]	MDO [63]	EC_GTX_CLK125	TSEC1_TXD [3]	TSEC1_TXD [4]	NC	SGND_SRD2	SD2_RX [3]	SD2_RX [3]	SGND_SRD2	SVDD_SRD2	SD2_REF_CLK	SD2_REF_CLK	SVDD_SRD2	SGND_SRD2			
3	GND	MDO [45]	MDO [41]	MCS [0]	GND	MDO [33]	GVDD	MDO [38]	MDO [39]	GND	MDM [6]	MDO5 [6]	MDO [50]	MDO [51]	GVDD	TSEC1_TX_ER	LVDD [2]	TSEC1_TXD [4]	NC	TEMP_ANODE	TEMP_CATHODE	SGND_SRD2	SGND_SRD2	SGND_SRD2	SGND_SRD2	SGND_SRD2	SD2_PLL_TPD	SD2_IMP_CAL_RX			
4	MBA [0]	MWE	MCS [2]	GVDD	MDO [36]	GND	MDM [4]	GND	MDO [39]	MDO [53]	MDO [49]	MDO5 [6]	MDO [54]	MDO [55]	LVDD [1]	TSEC1_CRS	TSEC1_TX_ER	GND	NC	XGND_SRD2	XGND_SRD2	SD2_TX [2]	SD2_TX [2]	XGND_SRD2	XGND_SRD2	SD2_TST_CLK	SD2_TST_CLK	XGND_SRD2			
5	MA [10]	MBA [11]	MFRAS	GND	MODT [0]	GVDD	MDO [37]	GVDD	MDO5 [4]	MDO5 [4]	MDO [48]	GND	GVDD	GND	TSEC1_COL	TSEC1_TXD [7]	TSEC1_TXD [6]	TSEC1_TXD [5]	NC	SD2_TX [3]	SD2_TX [3]	TRIG_OUTHEAD_OUTRES2	MSRCID [1]	MSRCID [1]	OVDD [12]	XVDD_SRD2	AVDD_SRD2	CRSTP_IN			
6	TEST_OUT	NC	GND	GVDD	MODT [2]	MODT [3]	MCS [3]	MCS [3]	MCK [2]	MCK [2]	NC	TSEC3_TXD [0]	TSEC3_TXD [1]	TSEC3_TXD [2]	TSEC3_TXD [3]	TSEC1_RXD [0]	TSEC1_RXD [1]	TSEC1_RXD [2]	GND	TSEC1_TXD [3]	NC	XVDD_SRD2	XVDD_SRD2	MSRCID [3]	PC11_REG [0]	PC11_REG [1]	PC11_REG [1]	PC11_REG [1]			
7	GND	MA [0]	GVDD	NC	MCRAS	MA [13]	GVDD	MODT [1]	NC	GND	TSEC3_TXD [3]	TSEC3_TXD [7]	TSEC3_TXD [6]	TSEC3_TXD [5]	TSEC3_GTX_CLK	TSEC1_RXD [1]	TSEC1_RXD [2]	TSEC1_RXD [3]	NC	MSRCID [0]	DMA_DDOONE [0]	OVDD [2]	EC_MDC	GND	PC11_REG [0]	PC11_REG [1]	PC11_REG [1]	PC11_REG [1]			
8	MCK [3]	MCK [3]	MA [2]	GND	GVDD	GND	MA [1]	MCK [3]	MCK [5]	GND	TSEC3_TX_ER	TSEC3_TXD [4]	TVDD [1]	TSEC3_RXD [5]	TSEC3_RXD [5]	TSEC1_RXD [2]	TSEC1_RXD [3]	TSEC1_RXD [4]	NC	NC	MDVAL	GND	PC11_REG [0]	PC11_REG [0]	PC11_AD [20]	PC11_AD [21]	PC11_AD [21]	PC11_AD [21]			
9	MCK [0]	MCK [0]	GVDD	MA [4]	MA [8]	MA [7]	GVDD	MCKE [3]	NC	NC	TSEC3_CRS	TSEC3_COL	TSEC3_RXD [1]	TSEC3_RXD [0]	TSEC3_RXD [0]	TSEC1_RXD [4]	TSEC1_RXD [6]	TSEC1_RXD [8]	NC	MSRCID [1]	EC_MDO	MSRCID [2]	PC11_AD [26]	PC11_AD [25]	OVDD [7]	PC11_AD [24]	PC11_REG [4]	PC11_REG [4]			
10	MA [9]	GND	MA [5]	NC	MA [14]	MA [15]	MCKE [0]	MCKE [1]	GVDD	MCKE [1]	TSEC3_TX_CLK	GND	TSEC3_RXD [2]	TSEC3_RXD [0]	TVDD [2]	TSEC1_RXD [5]	TSEC1_RXD [7]	TSEC1_RXD [7]	NC	SENSE_VSS	GND	DMA_DDOONE [1]	DMA_DDOONE [1]	OVDD [3]	PC11_C_BE [3]	PC11_C_BE [3]	PC11_C_BE [3]	PC11_C_BE [3]			
11	MA [6]	GVDD	MECC [9]	MA [12]	GVDD	MECC [2]	GVDD	MCK [1]	MCK [1]	GND	TSEC3_RXD [4]	TSEC3_RXD [5]	TSEC3_RXD [6]	TSEC3_RXD [7]	TSEC3_RX_ER	NC	NC	NC	NC	SENSE_VDD	DMA_DDOONE [1]	DMA_DDOONE [1]	PC11_AD [20]	PC11_AD [21]	OVDD [8]	PC11_AD [16]	PC11_AD [16]	PC11_AD [16]			
12	MA [11]	MA [9]	GND	MECC [7]	GND	NC	MECC [0]	GVDD	GND	GVDD	GND	NC	VDD	NC	VDD	NC	VDD	NC	VDD	NC	NC	DMA_DACK [1]	OKSTP_OUT	PC11_AD [19]	PC11_AD [18]	PC11_FRAME	PC11_C_BE [2]	PC11_AD [17]	PC11_AD [27]	PC11_AD [28]	
13	TEST_IN	MBA [2]	MECC [6]	MDO5 [8]	MDO5 [8]	MDM [8]	GND	MCK [4]	MCK [4]	NC	NC	VDD	GND	VDD	GND	VDD	GND	VDD	NC	NC	DMA_DACK [0]	PC11_STOP	OVDD [4]	PC11_DEVSEL	PC11_TRDY	OVDD [9]	PC11_IRDY	PC11_IRDY	TEST_SEL		
14	GND	MDO [27]	GVDD	MECC [1]	GVDD	MECC [5]	MECC [4]	GVDD	GND	GVDD	VDD	GND	VDD	GND	VDD	GND	VDD	GND	NC	NC	PC11_AD [15]	PC11_C_BE [1]	PC11_PAR	PC11_SERR	PC11_OUT	PC11_PERR	GND	IC2_SDA	AVDD_CORE		
15	MDO [26]	MDO [31]	GND	GVDD	GND	GVDD	GND	MDIC [0]	GND	MDIC [1]	GND	VDD	GND	VDD	GND	VDD	GND	VDD	NC	NC	PC11_AD [9]	PC11_AD [11]	PC11_AD [12]	PC11_AD [13]	OVDD [10]	PC11_AD [14]	RTC	HRESET	UDE		
16	MDO [30]	MDO5 [3]	MDO [19]	MDO [23]	MDO [18]	GND	LCS [4]	LCS [4]	LCS [4]	LA [28]	VDD	GND	VDD	GND	VDD	GND	VDD	GND	NC	NC	OVDD [1]	PC11_AD [0]	PC11_AD [8]	GND	PC11_AD [10]	PC11_AD [10]	PC11_C_BE [0]	PC11_C_BE [0]	PC11_C_BE [0]		
17	MDO5 [3]	MDM [3]	GVDD	GND	MDO5 [2]	MDO [21]	LA [31]	LA [30]	GND	LA [29]	LOKE	VDD	GND	VDD	GND	VDD	GND	VDD	NC	NC	NC	GND	PC11_AD [2]	PC11_AD [1]	PC11_C_BE [0]	L2_TSTCLK	PC11_AD [11]	PC11_AD [7]	PC11_AD [7]		
18	MDO [25]	MDO [24]	MDO5 [2]	MDM [2]	GVDD	MDO [21]	GND	LGPL3_LSDCA5	BVDD	LCS [0]	LCS [0]	VDD	GND	VDD	GND	VDD	GND	VDD	NC	NC	NC	NC	PC11_AD [1]	OVDD [6]	GND	PC11_AD [6]	PC11_AD [7]	MCP	AVDD_PLAT		
19	MDO [28]	MDO [28]	NC	MDO [17]	MDO [16]	MDO [20]	LCS [1]	LCS [2]	BVDD	LGPL5_LSDCA7	LA [27]	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	PC11_AD [3]	PC11_AD [4]	PC11_AD [4]	PC11_AD [4]	PC11_AD [4]	SRESET	LSSD_MODE		
20	MDO [11]	MDO [10]	GND	GVDD	GND	BVDD	LGPL1_LSDA10	LGPL1_LSDA10	LGPL1_LSDA10	LGPL1_LSDA10	LGPL1_LSDA10	XGND_SRD5	SD1_TX [1]	XVDD_SRD5	SD1_TX [1]	XGND_SRD5	SD1_TX [3]	XGND_SRD5	SD1_TX [4]	XGND_SRD5	SD1_TX [6]	XGND_SRD5	SD1_TX [6]	SD2_TX [0]	NC	L1_TSTCLK	OVDD [11]	GPIN [7]	OVDD [15]	AVDD_PCH1	
21	MDO [15]	MDO [14]	GVDD	MDO [3]	MDO [7]	GND	LAD [31]	LAD [30]	BVDD	GND	LAD [1]	XVDD_SRD5	SD1_TX [1]	XGND_SRD5	SD1_TX [3]	XGND_SRD5	SD1_TX [4]	XGND_SRD5	SD1_TX [6]	XGND_SRD5	SD1_TX [6]	XGND_SRD5	SD1_TX [6]	SD2_TX [0]	NC	GND	PC11_AD [2]	PC11_AD [3]	PC11_AD [3]	PC11_AD [3]	
22	MDO5 [1]	MDO5 [1]	MDO [2]	MDO [6]	GVDD	LAD [29]	LAD [30]	LAD [30]	LAD [30]	LAD [2]	LAD [2]	SD1_TX [0]	XGND_SRD5	SD1_TX [2]	XVDD_SRD5	SD1_TX [2]	XGND_SRD5	SD1_TX [5]	XVDD_SRD5	SD1_TX [7]	XGND_SRD5	NC	PC11_AD [7]	GPIN [4]	OVDD [13]	GPIN [13]	GPIN [13]	GPIN [13]	GPIN [13]		
23	MDO [9]	MDM [1]	MDO5 [0]	GND	LAD [27]	BVDD	LAD [28]	LAD [28]	BVDD	LAD [3]	BVDD	SD1_TX [0]	XVDD_SRD5	SD1_TX [2]	XGND_SRD5	XVDD_SRD5	SD1_TX [5]	XGND_SRD5	SD1_TX [5]	XGND_SRD5	SD1_TX [7]	XVDD_SRD5	NC	PC11_AD [8]	GPIN [2]	GND	GPIN [5]	GND	GPIN [11]		
24	MDO [8]	MDO [13]	GVDD	MDO5 [0]	LAD [24]	LAD [23]	LAD [26]	LCLK [0]	LCLK [1]	LAD [4]	LAD [5]	XGND_SRD5	NC	SGND_SRD5	SGND_SRD5	SVDD_SRD5	SVDD_SRD5	SGND_SRD5	SGND_SRD5	SVDD_SRD5	SVDD_SRD5	SGND_SRD5	SGND_SRD5	SGND_SRD5	SGND_SRD5	SGND_SRD5	SGND_SRD5	SGND_SRD5	SGND_SRD5		
25	MDO [12]	MDO [5]	MDM [0]	MDO [4]	LDP [3]	LAD [19]	GND	LCLK [2]	LBDCTL	LAD [7]	LAD [6]	NC	SVDD_SRD5	SD1_RX [1]	SGND_SRD5	SD1_RX [3]	SVDD_SRD5	NC	NC	SGND_SRD5	SD1_RX [4]	SVDD_SRD5	SD1_RX [6]	SGND_SRD5	SD2_RX [0]	SGND_SRD5	GPIN [5]	GPIN [6]	GPIN [3]		
26	MDO [0]	MDO [11]	LAD [25]	GND	LAD [22]	LAD [16]	BVDD	LAD [16]	LAD [16]	LDP [0]	GND	SD1_IMP_CAL_RX	SGND_SRD5	SD1_RX [0]	SVDD_SRD5	SD1_RX [3]	SGND_SRD5	SD1_PLL_TPA	SD1_PLL_TPA	SVDD_SRD5	SD1_RX [4]	SGND_SRD5	SD1_RX [4]	SGND_SRD5	SD1_RX [6]	SVDD_SRD5	SD2_RX [0]	SVDD_SRD5	GPIN [7]	GPIN [6]	PC11_CLK
27	GND	LDP [2]	GND	LSYNC_IN	LAD [21]	GND	LAD [15]	LAD [14]	GND	LAD [11]	LAD [9]	SVDD_SRD5	SD1_RX [0]	SGND_SRD5	SD1_RX [2]	SVDD_SRD5	SD1_REF_CLK	AGND_SRD5	NC	SVDD_SRD5	SD1_RX [5]	SGND_SRD5	SD1_RX [7]	SVDD_SRD5	SD1_RX [7]	SD1_IMP_CAL_TX	OVDD [17]	GPIN [2]	TMS		
28	MVREF	GND	AVDD_LBU	LSYNC_OUT	LAD [20]	LAD [17]	LDP [1]	LAD [13]	LAD [12]	LAD [10]	LAD [8]	SGND_SRD5	SD1_RX [0]	SVDD_SRD5	SD1_RX [2]	SGND_SRD5	SD1_REF_CLK	SD1_REF_CLK	SD1_PLL_TPD	AVDD_SRD5	SGND_SRD5	SD1_RX [5]	SD1_RX [7]	SD1_RX [7]	SD1_RX [7]	SD1_IMP_CAL_TX	TDO	TCK	TDI		

Figure 9. MPC8544E Ball Map

### 4.3 Pin Listings

A downloadable version of the pin list is available in the file AN3547SW.zip on Freescale.com.

**Table 7. Pin List—By Bus**

Bus	Signal	Pin
PCI	PCI1_AD[31]	AE8
	PCI1_AD[30]	AD8
	PCI1_AD[29]	AF8
	PCI1_AD[28]	AH12
	PCI1_AD[27]	AG12
	PCI1_AD[26]	AB9
	PCI1_AD[25]	AC9
	PCI1_AD[24]	AE9
	PCI1_AD[23]	AD10
	PCI1_AD[22]	AE10
	PCI1_AD[21]	AC11
	PCI1_AD[20]	AB11
	PCI1_AD[19]	AB12
	PCI1_AD[18]	AC12
	PCI1_AD[17]	AF12
	PCI1_AD[16]	AE11
	PCI1_AD[15]	Y14
	PCI1_AD[14]	AE15
	PCI1_AD[13]	AC15
	PCI1_AD[12]	AB15
	PCI1_AD[11]	AA15
	PCI1_AD[10]	AD16
	PCI1_AD[9]	Y15
	PCI1_AD[8]	AB16
	PCI1_AD[7]	AF18
	PCI1_AD[6]	AE18
	PCI1_AD[5]	AC17
	PCI1_AD[4]	AE19
	PCI1_AD[3]	AD19
	PCI1_AD[2]	AB17
	PCI1_AD[1]	AB18
	PCI1_AD[0]	AA16
	PCI1_C_BE[3]	AC10
	PCI1_C_BE[2]	AE12
	PCI1_C_BE[1]	AA14
	PCI1_C_BE[0]	AD17
	PCI1_GNT[4]	AE7
	PCI1_GNT[3]	AG11
	PCI1_GNT[2]	AH11
	PCI1_GNT[1]	AC8
	PCI1_GNT[0]	AE6
	PCI1_IRDY	AF13
	PCI1_PAR	AB14
	PCI1_PERR	AE14
	PCI1_SERR	AC14
	PCI1_STOP	AA13

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin	
PCI	PCI1_TRDY	AD13	
	PCI1_REQ[4]	AF9	
	PCI1_REQ[3]	AG10	
	PCI1_REQ[2]	AH10	
	PCI1_REQ[1]	AD6	
	PCI1_REQ[0]	AB8	
	PCI1_CLK	AH26	
	PCI1_DEVSEL	AC13	
	PCI1_FRAME	AD12	
	PCI1_IDSEL	AG6	
	DDR SDRAM Memory Interface	MDQ[0]	A26
		MDQ[1]	B26
		MDQ[2]	C22
MDQ[3]		D21	
MDQ[4]		D25	
MDQ[5]		B25	
MDQ[6]		D22	
MDQ[7]		E21	
MDQ[8]		A24	
MDQ[9]		A23	
MDQ[10]		B20	
MDQ[11]		A20	
MDQ[12]		A25	
MDQ[13]		B24	
MDQ[14]		B21	
MDQ[15]		A21	
MDQ[16]		E19	
MDQ[17]		D19	
MDQ[18]		E16	
MDQ[19]		C16	
MDQ[20]		F19	
MDQ[21]		F18	
MDQ[22]		F17	
MDQ[23]		D16	
MDQ[24]		B18	
MDQ[25]		A18	
MDQ[26]		A15	
MDQ[27]		B14	
MDQ[28]		B19	
MDQ[29]		A19	
MDQ[30]		A16	
MDQ[31]		B15	
MDQ[32]		D1	
MDQ[33]		F3	
MDQ[34]		G1	
MDQ[35]	H2		

Table 7. Pin List—By Bus (continued)

Bus	Signal	Pin
DDR SDRAM Memory Interface	MDQ[36]	E4
	MDQ[37]	G5
	MDQ[38]	H3
	MDQ[39]	J4
	MDQ[40]	B2
	MDQ[41]	C3
	MDQ[42]	F2
	MDQ[43]	G2
	MDQ[44]	A2
	MDQ[45]	B3
	MDQ[46]	E1
	MDQ[47]	F1
	MDQ[48]	L5
	MDQ[49]	L4
	MDQ[50]	N3
	MDQ[51]	P3
	MDQ[52]	J3
	MDQ[53]	K4
	MDQ[54]	N4
	MDQ[55]	P4
	MDQ[56]	J1
	MDQ[57]	K1
	MDQ[58]	P1
	MDQ[59]	R1
	MDQ[60]	J2
	MDQ[61]	K2
	MDQ[62]	N1
	MDQ[63]	R2
	MECC[0]	G12
	MECC[1]	D14
	MECC[2]	F11
	MECC[3]	C11
	MECC[4]	G14
	MECC[5]	F14
	MECC[6]	C13
	MECC[7]	D12
	MDM[0]	C25
	MDM[1]	B23
	MDM[2]	D18
	MDM[3]	B17
	MDM[4]	G4
	MDM[5]	C2
MDM[6]	L3	
MDM[7]	L2	
MDM[8]	F13	
MDQS[0]	D24	

Table 7. Pin List—By Bus (continued)

Bus	Signal	Pin
DDR SDRAM Memory Interface	$\overline{\text{MDQS}}[1]$	B22
	$\overline{\text{MDQS}}[2]$	C18
	$\overline{\text{MDQS}}[3]$	A17
	$\overline{\text{MDQS}}[4]$	J5
	$\overline{\text{MDQS}}[5]$	C1
	$\overline{\text{MDQS}}[6]$	M4
	$\overline{\text{MDQS}}[7]$	M2
	$\overline{\text{MDQS}}[8]$	E13
	MDQS[0]	C23
	MDQS[1]	A22
	MDQS[2]	E17
	MDQS[3]	B16
	MDQS[4]	K5
	MDQS[5]	D2
	MDQS[6]	M3
	MDQS[7]	P2
	MDQS[8]	D13
	MA[0]	B7
	MA[1]	G8
	MA[2]	C8
	MA[3]	A10
	MA[4]	D9
	MA[5]	C10
	MA[6]	A11
	MA[7]	F9
	MA[8]	E9
	MA[9]	B12
	MA[10]	A5
	MA[11]	A12
	MA[12]	D11
	MA[13]	F7
	MA[14]	E10
	MA[15]	F10
	MBA[0]	A4
	MBA[1]	B5
	MBA[2]	B13
	$\overline{\text{MWE}}$	B4
	$\overline{\text{MCAS}}$	E7
	$\overline{\text{MRAS}}$	C5
	MCKE[0]	H10
	MCKE[1]	K10
	MCKE[2]	G10
MCKE[3]	H9	
$\overline{\text{MCS}}[0]$	D3	
$\overline{\text{MCS}}[1]$	H6	
$\overline{\text{MCS}}[2]$	C4	

Table 7. Pin List—By Bus (continued)

Bus	Signal	Pin
DDR SDRAM Memory Interface	$\overline{\text{MCS}}[3]$	G6
	MCK[0]	A9
	MCK[1]	J11
	MCK[2]	J6
	MCK[3]	A8
	MCK[4]	J13
	MCK[5]	H8
	$\overline{\text{MCK}}[0]$	B9
	$\overline{\text{MCK}}[1]$	H11
	$\overline{\text{MCK}}[2]$	K6
	$\overline{\text{MCK}}[3]$	B8
	$\overline{\text{MCK}}[4]$	H13
	$\overline{\text{MCK}}[5]$	J8
	MODT[0]	E5
	MODT[1]	H7
	MODT[2]	E6
	MODT[3]	F6
	MDIC[0]	H15
	MDIC[1]	K15
	TEST_IN	A13
TEST_OUT	A6	
Local Bus Controller Interface	LAD[0]	K22
	LAD[1]	L21
	LAD[2]	L22
	LAD[3]	K23
	LAD[4]	K24
	LAD[5]	L24
	LAD[6]	L25
	LAD[7]	K25
	LAD[8]	L28
	LAD[9]	L27
	LAD[10]	K28
	LAD[11]	K27
	LAD[12]	J28
	LAD[13]	H28
	LAD[14]	H27
	LAD[15]	G27
	LAD[16]	G26
	LAD[17]	F28
	LAD[18]	F26
	LAD[19]	F25
	LAD[20]	E28
	LAD[21]	E27
	LAD[22]	E26
	LAD[23]	F24
LAD[24]	E24	

Table 7. Pin List—By Bus (continued)

Bus	Signal	Pin
Local Bus Controller Interface	LAD[25]	C26
	LAD[26]	G24
	LAD[27]	E23
	LAD[28]	G23
	LAD[29]	F22
	LAD[30]	G22
	LAD[31]	G21
	LDP[0]	K26
	LDP[1]	G28
	LDP[2]	B27
	LDP[3]	E25
	LA[27]	L19
	LA[28]	K16
	LA[29]	K17
	LA[30]	H17
	LA[31]	G17
	$\overline{\text{LCS}}[0]$	K18
	$\overline{\text{LCS}}[1]$	G19
	$\overline{\text{LCS}}[2]$	H19
	$\overline{\text{LCS}}[3]$	H20
	$\overline{\text{LCS}}[4]$	G16
	$\overline{\text{LCS5/DMA\_DREQ2}}$	H16
	$\overline{\text{LCS6/DMA\_DACK2}}$	J16
	$\overline{\text{LCS7/DMA\_DDONE2}}$	L18
	$\overline{\text{LWE0/LBS0/LSDDQM}}[0]$	J22
	$\overline{\text{LWE1/LBS1/LSDDQM}}[1]$	H22
	$\overline{\text{LWE2/LBS2/LSDDQM}}[2]$	H23
	$\overline{\text{LWE3/LBS3/LSDDQM}}[3]$	H21
	LALE	J26
	LBCTL	J25
	LGPL0/LSDA10	J20
	LGPL1/LSDWE	K20
	LGPL2/LOE/LSDRAS	G20
LGPL3/LSDCAS	H18	
LGPL4/LGTA/LUPWAIT/LPBSE	L20	
LGPL5	K19	
LCKE	L17	
LCLK[0]	H24	
LCLK[1]	J24	
LCLK[2]	H25	
LSYNC_IN	D27	
LSYNC_OUT	D28	
DMA	$\overline{\text{DMA\_DACK}}[0]$	Y13
	$\overline{\text{DMA\_DACK}}[1]$	Y12
	$\overline{\text{DMA\_DREQ}}[0]$	AA10
	$\overline{\text{DMA\_DREQ}}[1]$	AA11

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
DM A	DMA_DDONE[0]	AA7
	DMA_DDONE[1]	Y11
Programmable Interrupt Controller	UDE	AH15
	MCP	AG18
	IRQ[0]	AG22
	IRQ[1]	AF17
	IRQ[2]	AD21
	IRQ[3]	AF19
	IRQ[4]	AG17
	IRQ[5]	AF16
	IRQ[6]	AC23
	IRQ[7]	AC22
	IRQ[8]	AC19
	IRQ[9]/DMA_DREQ3	AG20
	IRQ[10]/DMA_DACK3	AE27
	IRQ[11]/DMA_DDONE3	AE24
	IRQ_OUT	AD14
	Ethernet	EC_MDC
	EC_MDIO	Y9
Gigabit Reference Clock	EC_GTX_CLK125	T2
Three-Speed Ethernet Controller (Gigabit Ethernet 1)	TSEC1_RXD[7]	U10
	TSEC1_RXD[6]	U9
	TSEC1_RXD[5]	T10
	TSEC1_RXD[4]	T9
	TSEC1_RXD[3]	U8
	TSEC1_RXD[2]	T8
	TSEC1_RXD[1]	T7
	TSEC1_RXD[0]	T6
	TSEC1_TXD[7]	T5
	TSEC1_TXD[6]	U5
	TSEC1_TXD[5]	V5
	TSEC1_TXD[4]	V3
	TSEC1_TXD[3]	V2
	TSEC1_TXD[2]	V1
	TSEC1_TXD[1]	U2
	TSEC1_TXD[0]	U1
	TSEC1_COL	R5
	TSEC1_CRS	T4
	TSEC1_GTX_CLK	T1
	Three-Speed Ethernet Controller (Gigabit Ethernet)	TSEC1_RX_CLK
TSEC1_RX_DV		U7
TSEC1_RX_ER		R9
TSEC1_TX_CLK		V6
TSEC1_TX_EN		U4
TSEC1_TX_ER		T3

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
Three-Speed Ethernet Controller (Gigabit Ethernet 3)	TSEC3_RXD[7]	P11
	TSEC3_RXD[6]	N11
	TSEC3_RXD[5]	M11
	TSEC3_RXD[4]	L11
	TSEC3_RXD[3]	R8
	TSEC3_RXD[2]	N10
	TSEC3_RXD[1]	N9
	TSEC3_RXD[0]	P10
	TSEC3_TXD[7]	M7
	TSEC3_TXD[6]	N7
	TSEC3_TXD[5]	P7
	TSEC3_TXD[4]	M8
	TSEC3_TXD[3]	L7
	TSEC3_TXD[2]	R6
	TSEC3_TXD[1]	P6
	TSEC3_TXD[0]	M6
	TSEC3_COL	M9
	TSEC3_CRS	L9
	TSEC3_GTX_CLK	R7
	TSEC3_RX_CLK	P9
TSEC3_RX_DV	P8	
TSEC3_RX_ER	R11	
TSEC3_TX_CLK	L10	
TSEC3_TX_EN	N6	
TSEC3_TX_ER	L8	
DUART	UART_CTS[0]	AH8
	UART_CTS[1]	AF6
	UART_RTS[0]	AG8
	UART_RTS[1]	AG9
	UART_SIN[0]	AG7
	UART_SIN[1]	AH6
UART_SOUT[0]	AH7	
UART_SOUT[1]	AF7	
I2C Interface	IIC1_SCL	AG21
	IIC1_SDA	AH21
	IIC2_SCL	AG13
	IIC2_SDA	AG14
SerDes1	SD1_RX[0]	N28
	SD1_RX[1]	P26
	SD1_RX[2]	R28
	SD1_RX[3]	T26
	SD1_RX[4]	Y26
	SD1_RX[5]	AA28
	SD1_RX[6]	AB26
	SD1_RX[7]	AC28
SD1_RX[0]	N27	

Table 7. Pin List—By Bus (continued)

Bus	Signal	Pin
SerDes1	SD1_RX[1]	P25
	SD1_RX[2]	R27
	SD1_RX[3]	T25
	SD1_RX[4]	Y25
	SD1_RX[5]	AA27
	SD1_RX[6]	AB25
	SD1_RX[7]	AC27
	SD1_TX[0]	M23
	SD1_TX[1]	N21
	SD1_TX[2]	P23
	SD1_TX[3]	R21
	SD1_TX[4]	U21
	SD1_TX[5]	V23
	SD1_TX[6]	W21
	SD1_TX[7]	Y23
	SD1_TX[0]	M22
	SD1_TX[1]	N20
	SD1_TX[2]	P22
	SD1_TX[3]	R20
	SD1_TX[4]	U20
	SD1_TX[5]	V22
	SD1_TX[6]	W20
	SD1_TX[7]	Y22
	SD1_PLL_TPD	V28
	SD1_REF_CLK	U28
	SD1_REF_CLK	U27
	SD1_TST_CLK	T22
	SD1_TST_CLK	T23
SerDes2	SD2_RX[0]	AD26
	SD2_RX[2]	AD1
	SD2_RX[3]	AB2
	SD2_RX[0]	AD25
	SD2_RX[2]	AC1
	SD2_RX[3]	AA2
	SD2_TX[0]	AA21
	SD2_TX[2]	AC4
	SD2_TX[3]	AA5
	SD2_TX[0]	AA20
	SD2_TX[2]	AB4
	SD2_TX[3]	Y5
	SD2_PLL_TPD	AG3
	SD2_REF_CLK	AE2
	SD2_REF_CLK	AF2
	SD2_TST_CLK	AG4
SD2_TST_CLK	AF4	

Table 7. Pin List—By Bus (continued)

Bus	Signal	Pin
General-Purpose Output	GPOUT[0]	AF22
	GPOUT[1]	AH23
	GPOUT[2]	AG27
	GPOUT[3]	AH25
	GPOUT[4]	AF21
	GPOUT[5]	AF25
	GPOUT[6]	AG26
	GPOUT[7]	AF26
General-Purpose Input	GPIN[0]	AH24
	GPIN[1]	AG24
	GPIN[2]	AD23
	GPIN[3]	AE21
	GPIN[4]	AD22
	GPIN[5]	AF23
	GPIN[6]	AG25
	GPIN[7]	AE20
System Control	HRESET	AG16
	HRESET_REQ	AG15
	SRESET	AG19
	CKSTP_IN	AH5
	CKSTP_OUT	AA12
Debug	TRIG_IN	AC5
	TRIG_OUT/READY/QUIESCE	AB5
	MSRCID[0]	Y7
	MSRCID[1]	W9
	MSRCID[2]	AA9
	MSRCID[3]	AB6
	MSRCID[4]	AD5
	MDVAL	Y8
Clock	CLK_OUT	AE16
	RTC	AF15
JTAG	SYSCLK	AH16
	TCK	AG28
	TDI	AH28
	TDO	AF28
	TMS	AH27
DFT	TRST	AH22
	L1_TSTCLK	AC20
	L2_TSTCLK	AE17
	LSSD_MODE	AH19
Thermal Management	TEST_SEL	AH13
	TEMP_ANODE	Y3
	TEMP_CATHODE	AA3

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
Power Management	ASLEEP	AH17
Power and Ground Signals	GND	D5
	GND	M10
	GND	F4
	GND	D26
	GND	D23
	GND	C12
	GND	C15
	GND	E20
	GND	D8
	GND	B10
	GND	E3
	GND	J14
	GND	K21
	GND	F8
	GND	A3
	GND	F16
	GND	E12
	GND	E15
	GND	D17
	GND	L1
	GND	F21
	GND	H1
	GND	G13
	GND	G15
	GND	G18
	GND	C6
	GND	A14
	GND	A7
	GND	G25
	GND	H4
	GND	C20
	GND	J12
	GND	J15
GND	J17	
GND	F27	
GND	M5	
GND	J27	
GND	K11	
GND	L26	

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
Power and Ground Signals	GND	K7
	GND	K8
	GND	L12
	GND	L15
	GND	M14
	GND	M16
	GND	M18
	GND	N13
	GND	N15
	GND	N17
	GND	N2
	GND	P5
	GND	P14
	GND	P16
	GND	P18
	GND	R13
	GND	R15
	GND	R17
	GND	T14
	GND	T16
	GND	T18
	GND	U13
	GND	U15
	GND	U17
	GND	AA8
	GND	U6
	GND	Y10
	GND	AC21
	GND	AA17
	GND	AC16
	GND	V4
	GND	AD7
	GND	AD18
	GND	AE23
	GND	AF11
	GND	AF14
GND	AG23	
GND	AH9	
GND	A27	
GND	B28	
GND	C27	
OVDD	Y16	
OVDD	AB7	
OVDD	AB10	
OVDD	AB13	
OVDD	AC6	



**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
Power and Ground Signals	OVDD	AC18
	OVDD	AD9
	OVDD	AD11
	OVDD	AE13
	OVDD	AD15
	OVDD	AD20
	OVDD	AE5
	OVDD	AE22
	OVDD	AF10
	OVDD	AF20
	OVDD	AF24
	OVDD	AF27
	LVDD	R4
	LVDD	U3
	TVDD	N8
	TVDD	R10
	GVDD	B1
	GVDD	B11
	GVDD	C7
	GVDD	C9
	GVDD	C14
	GVDD	C17
	GVDD	D4
	GVDD	D6
	GVDD	R3
	GVDD	D15
	GVDD	E2
	GVDD	E8
	GVDD	C24
	GVDD	E18
	GVDD	F5
	GVDD	E14
	GVDD	C21
	GVDD	G3
	GVDD	G7
	GVDD	G9
	GVDD	G11
	GVDD	H5
	GVDD	H12
	GVDD	E22
	GVDD	F15
	GVDD	J10
	GVDD	K3
GVDD	K12	
GVDD	K14	
GVDD	H14	

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
Power and Ground Signals	GVDD	D20
	GVDD	E11
	GVDD	M1
	GVDD	N5
	BVDD	L23
	BVDD	J18
	BVDD	J19
	BVDD	F20
	BVDD	F23
	BVDD	H26
	BVDD	J21
	BVDD	J23
	VDD	L16
	VDD	L14
	VDD	M13
	VDD	M15
	VDD	M17
	VDD	N12
	VDD	N14
	VDD	N16
	VDD	N18
	VDD	P13
	VDD	P15
	VDD	P17
	VDD	R12
	VDD	R14
	VDD	R16
	VDD	R18
	VDD	T13
	VDD	T15
	VDD	T17
	VDD	U12
	VDD	U14
	VDD	U16
	VDD	U18
	SVDD_SRDS	M27
	SVDD_SRDS	N25
	SVDD_SRDS	P28
	SVDD_SRDS	R24
	SVDD_SRDS	R26
	SVDD_SRDS	T24
	SVDD_SRDS	T27
	SVDD_SRDS	U25
SVDD_SRDS	W24	
SVDD_SRDS	W26	
SVDD_SRDS	Y24	

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
Power and Ground Signals	SVDD_SRDS	Y27
	SVDD_SRDS	AA25
	SVDD_SRDS	AB28
	SVDD_SRDS	AD27
	SVDD_SRDS2	AB1
	SVDD_SRDS2	AC26
	SVDD_SRDS2	AD2
	SVDD_SRDS2	AE26
	SVDD_SRDS2	AG2
	XVDD_SRDS	M21
	XVDD_SRDS	N23
	XVDD_SRDS	P20
	XVDD_SRDS	R22
	XVDD_SRDS	T20
	XVDD_SRDS	U23
	XVDD_SRDS	V21
	XVDD_SRDS	W22
	XVDD_SRDS	Y20
	XVDD_SRDS2	Y6
	XVDD_SRDS2	AA6
	XVDD_SRDS2	AA23
	XVDD_SRDS2	AF5
	XVDD_SRDS2	AG5
	XGND_SRDS	M20
	XGND_SRDS	M24
	XGND_SRDS	N22
	XGND_SRDS	P21
	XGND_SRDS	R23
	XGND_SRDS	T21
	XGND_SRDS	U22
	XGND_SRDS	V20
	XGND_SRDS	W23
	XGND_SRDS	Y21
	XGND_SRDS2	Y4
	XGND_SRDS2	AA4
	XGND_SRDS2	AA22
	XGND_SRDS2	AD4
	XGND_SRDS2	AE4
	XGND_SRDS2	AH4
	SGND_SRDS	M28
	SGND_SRDS	N26
	SGND_SRDS	P24
SGND_SRDS	P27	
SGND_SRDS	R25	
SGND_SRDS	T28	
SGND_SRDS	U24	

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
Power and Ground Signals	SGND_SRDS	U26
	SGND_SRDS	V24
	SGND_SRDS	W25
	SGND_SRDS	Y28
	SGND_SRDS	AA24
	SGND_SRDS	AA26
	SGND_SRDS	AB24
	SGND_SRDS	AB27
	SGND_SRDS	AC24
	SGND_SRDS	AD28
	AGND_SRDS	V27
	SGND_SRDS2	Y2
	SGND_SRDS2	AA1
	SGND_SRDS2	AB3
	SGND_SRDS2	AC2
	SGND_SRDS2	AC3
	SGND_SRDS2	AC25
	SGND_SRDS2	AD3
	SGND_SRDS2	AD24
	SGND_SRDS2	AE3
	SGND_SRDS2	AE1
	SGND_SRDS2	AE25
	SGND_SRDS2	AF3
	SGND_SRDS2	AH2
	AGND_SRDS2	AF1
	AVDD_LBIU	C28
	AVDD_PCI1	AH20
	AVDD_CORE	AH14
	AVDD_PLAT	AH18
	AVDD_SRDS	W28
	AVDD_SRDS2	AG1
	SENSEVDD	W11
SENSEVSS	W10	
MVREF	A28	
SD1_IMP_CAL_RX	M26	
SD1_IMP_CAL_TX	AE28	
SD1_PLL_TPA	V26	
SD2_IMP_CAL_RX	AH3	
SD2_IMP_CAL_TX	Y1	
SD2_PLL_TPA	AH1	
Analog Signals	NC	C19
	NC	D7
	NC	D10
	NC	K13
	NC	L6
	NC	K9
No Connect Pins	NC	C19
	NC	D7
	NC	D10
	NC	K13
	NC	L6
	NC	K9

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
No Connect Pins	NC	B6
	NC	F12
	NC	J7
	NC	M19
	NC	M25
	NC	N19
	NC	N24
	NC	P19
	NC	R19
	NC	AB19
	NC	T12
	NC	W3
	NC	M12
	NC	W5
	NC	P12
	NC	T19
	NC	W1
	NC	W7
	NC	L13
	NC	U19
	NC	W4
	NC	V8
	NC	V9
	NC	V10
	NC	V11
	NC	V12
	NC	V13
	NC	V14
	NC	V15
	NC	V16
	NC	V17
	NC	V18
	NC	V19
	NC	W2
	NC	W6
	NC	W8
	NC	T11
	NC	U11
	NC	W12
	NC	W13
	NC	W14
	NC	W15
NC	W16	
NC	W17	
NC	W18	
NC	W19	

**Table 7. Pin List—By Bus (continued)**

Bus	Signal	Pin
No Connect Pins	NC	W27
	NC	V25
	NC	Y17
	NC	Y18
	NC	Y19
	NC	AA18
	NC	AA19
	NC	AB20
	NC	AB21
	NC	AB22
	NC	AB23
	NC	J9

**Table 8. Pin List—By Signal**

Signal	Pin
AGND_SRDS	V27
AGND_SRDS2	AF1
ASLEEP	AH17
AVDD_CORE	AH14
AVDD_LBIU	C28
AVDD_PCI1	AH20
AVDD_PLAT	AH18
AVDD_SRDS	W28
AVDD_SRDS2	AG1
BVDD	L23
BVDD	J18
BVDD	J19
BVDD	F20
BVDD	F23
BVDD	H26
BVDD	J21
BVDD	J23
$\overline{\text{CKSTP\_IN}}$	AH5
$\overline{\text{CKSTP\_OUT}}$	AA12
CLK_OUT	AE16
$\overline{\text{DMA\_DACK}}[0]$	Y13
$\overline{\text{DMA\_DACK}}[1]$	Y12
$\overline{\text{DMA\_DDONE}}[0]$	AA7
$\overline{\text{DMA\_DDONE}}[1]$	Y11
$\overline{\text{DMA\_DREQ}}[0]$	AA10
$\overline{\text{DMA\_DREQ}}[1]$	AA11
EC_GTX_CLK125	T2
EC_MDC	AC7
EC_MDIO	Y9
GND	D5
GND	M10
GND	F4
GND	D26

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
GND	D23
GND	C12
GND	C15
GND	E20
GND	D8
GND	B10
GND	E3
GND	J14
GND	K21
GND	F8
GND	A3
GND	F16
GND	E12
GND	E15
GND	D17
GND	L1
GND	F21
GND	H1
GND	G13
GND	G15
GND	G18
GND	C6
GND	A14
GND	A7
GND	G25
GND	H4
GND	C20
GND	J12
GND	J15
GND	J17
GND	F27
GND	M5
GND	J27

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
GND	K11
GND	L26
GND	K7
GND	K8
GND	L12
GND	L15
GND	M14
GND	M16
GND	M18
GND	N13
GND	N15
GND	N17
GND	N2
GND	P5
GND	P14
GND	P16
GND	P18
GND	R13
GND	R15
GND	R17
GND	T14
GND	T16
GND	T18
GND	U13
GND	U15
GND	U17
GND	AA8
GND	U6
GND	Y10
GND	AC21
GND	AA17
GND	AC16
GND	V4

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
GND	AD7
GND	AD18
GND	AE23
GND	AF11
GND	AF14
GND	AG23
GND	AH9
GND	A27
GND	B28
GND	C27
GPIN[0]	AH24
GPIN[1]	AG24
GPIN[2]	AD23
GPIN[3]	AE21
GPIN[4]	AD22
GPIN[5]	AF23
GPIN[6]	AG25
GPIN[7]	AE20
GPOUT[0]	AF22
GPOUT[1]	AH23
GPOUT[2]	AG27
GPOUT[3]	AH25
GPOUT[4]	AF21
GPOUT[5]	AF25
GPOUT[6]	AG26
GPOUT[7]	AF26
GVDD	B1
GVDD	B11
GVDD	C7
GVDD	C9
GVDD	C14
GVDD	C17
GVDD	D4

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
GVDD	D6
GVDD	R3
GVDD	D15
GVDD	E2
GVDD	E8
GVDD	C24
GVDD	E18
GVDD	F5
GVDD	E14
GVDD	C21
GVDD	G3
GVDD	G7
GVDD	G9
GVDD	G11
GVDD	H5
GVDD	H12
GVDD	E22
GVDD	F15
GVDD	J10
GVDD	K3
GVDD	K12
GVDD	K14
GVDD	H14
GVDD	D20
GVDD	E11
GVDD	M1
GVDD	N5
$\overline{\text{HRESET}}$	AG16
$\overline{\text{HRESET\_REQ}}$	AG15
IIC1_SCL	AG21
IIC1_SDA	AH21
IIC2_SCL	AG13
IIC2_SDA	AG14

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
IRQ[0]	AG22
IRQ[1]	AF17
IRQ[10]/ $\overline{\text{DMA\_DACK3}}$	AE27
IRQ[11]/ $\overline{\text{DMA\_DDONE3}}$	AE24
IRQ[2]	AD21
IRQ[3]	AF19
IRQ[4]	AG17
IRQ[5]	AF16
IRQ[6]	AC23
IRQ[7]	AC22
IRQ[8]	AC19
IRQ[9]/ $\overline{\text{DMA\_DREQ3}}$	AG20
$\overline{\text{IRQ\_OUT}}$	AD14
L1_TSTCLK	AC20
L2_TSTCLK	AE17
LA[27]	L19
LA[28]	K16
LA[29]	K17
LA[30]	H17
LA[31]	G17
LAD[0]	K22
LAD[1]	L21
LAD[10]	K28
LAD[11]	K27
LAD[12]	J28
LAD[13]	H28
LAD[14]	H27
LAD[15]	G27
LAD[16]	G26
LAD[17]	F28
LAD[18]	F26
LAD[19]	F25
LAD[2]	L22

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
LAD[20]	E28
LAD[21]	E27
LAD[22]	E26
LAD[23]	F24
LAD[24]	E24
LAD[25]	C26
LAD[26]	G24
LAD[27]	E23
LAD[28]	G23
LAD[29]	F22
LAD[3]	K23
LAD[30]	G22
LAD[31]	G21
LAD[4]	K24
LAD[5]	L24
LAD[6]	L25
LAD[7]	K25
LAD[8]	L28
LAD[9]	L27
LALE	J26
LBCTL	J25
LCKE	L17
LCLK[0]	H24
LCLK[1]	J24
LCLK[2]	H25
$\overline{\text{LCS}}[0]$	K18
$\overline{\text{LCS}}[1]$	G19
$\overline{\text{LCS}}[2]$	H19
$\overline{\text{LCS}}[3]$	H20
$\overline{\text{LCS}}[4]$	G16
$\overline{\text{LCS}}5/\text{DMA\_DREQ}2$	H16
$\overline{\text{LCS}}6/\text{DMA\_DACK}2$	J16
$\overline{\text{LCS}}7/\text{DMA\_DDONE}2$	L18

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
LDP[0]	K26
LDP[1]	G28
LDP[2]	B27
LDP[3]	E25
LGPL0/LSDA10	J20
LGPL1/ $\overline{\text{LSDWE}}$	K20
LGPL2/ $\overline{\text{LOE}}/\overline{\text{LSDRAS}}$	G20
LGPL3/ $\overline{\text{LSDCAS}}$	H18
LGPL4/ $\overline{\text{LGT\AA}}$ /LUPWAIT/LPBSE	L20
LGPL5	K19
$\overline{\text{LSSD\_MODE}}$	AH19
LSYNC_IN	D27
LSYNC_OUT	D28
LVDD	R4
LVDD	U3
$\overline{\text{LWE}}0/\overline{\text{LBS}}0/\text{LSDDQM}[0]$	J22
$\overline{\text{LWE}}1/\overline{\text{LBS}}1/\text{LSDDQM}[1]$	H22
$\overline{\text{LWE}}2/\overline{\text{LBS}}2/\text{LSDDQM}[2]$	H23
$\overline{\text{LWE}}3/\overline{\text{LBS}}3/\text{LSDDQM}[3]$	H21
MA[0]	B7
MA[1]	G8
MA[10]	A5
MA[11]	A12
MA[12]	D11
MA[13]	F7
MA[14]	E10
MA[15]	F10
MA[2]	C8
MA[3]	A10
MA[4]	D9
MA[5]	C10
MA[6]	A11
MA[7]	F9

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
MA[8]	E9
MA[9]	B12
MBA[0]	A4
MBA[1]	B5
MBA[2]	B13
$\overline{\text{MCAS}}$	E7
MCK[0]	A9
$\overline{\text{MCK}}[0]$	B9
MCK[1]	J11
$\overline{\text{MCK}}[1]$	H11
MCK[2]	J6
$\overline{\text{MCK}}[2]$	K6
MCK[3]	A8
$\overline{\text{MCK}}[3]$	B8
MCK[4]	J13
$\overline{\text{MCK}}[4]$	H13
MCK[5]	H8
$\overline{\text{MCK}}[5]$	J8
MCKE[0]	H10
MCKE[1]	K10
MCKE[2]	G10
MCKE[3]	H9
$\overline{\text{MCP}}$	AG18
$\overline{\text{MCS}}[0]$	D3
$\overline{\text{MCS}}[1]$	H6
$\overline{\text{MCS}}[2]$	C4
$\overline{\text{MCS}}[3]$	G6
MDIC[0]	H15
MDIC[1]	K15
MDM[0]	C25
MDM[1]	B23
MDM[2]	D18
MDM[3]	B17

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
MDM[4]	G4
MDM[5]	C2
MDM[6]	L3
MDM[7]	L2
MDM[8]	F13
MDQ[0]	A26
MDQ[1]	B26
MDQ[10]	B20
MDQ[11]	A20
MDQ[12]	A25
MDQ[13]	B24
MDQ[14]	B21
MDQ[15]	A21
MDQ[16]	E19
MDQ[17]	D19
MDQ[18]	E16
MDQ[19]	C16
MDQ[2]	C22
MDQ[20]	F19
MDQ[21]	F18
MDQ[22]	F17
MDQ[23]	D16
MDQ[24]	B18
MDQ[25]	A18
MDQ[26]	A15
MDQ[27]	B14
MDQ[28]	B19
MDQ[29]	A19
MDQ[3]	D21
MDQ[30]	A16
MDQ[31]	B15
MDQ[32]	D1
MDQ[33]	F3



**Table 8. Pin List—By Signal (continued)**

Signal	Pin
MDQ[34]	G1
MDQ[35]	H2
MDQ[36]	E4
MDQ[37]	G5
MDQ[38]	H3
MDQ[39]	J4
MDQ[4]	D25
MDQ[40]	B2
MDQ[41]	C3
MDQ[42]	F2
MDQ[43]	G2
MDQ[44]	A2
MDQ[45]	B3
MDQ[46]	E1
MDQ[47]	F1
MDQ[48]	L5
MDQ[49]	L4
MDQ[5]	B25
MDQ[50]	N3
MDQ[51]	P3
MDQ[52]	J3
MDQ[53]	K4
MDQ[54]	N4
MDQ[55]	P4
MDQ[56]	J1
MDQ[57]	K1
MDQ[58]	P1
MDQ[59]	R1
MDQ[6]	D22
MDQ[60]	J2
MDQ[61]	K2
MDQ[62]	N1
MDQ[63]	R2

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
MDQ[7]	E21
MDQ[8]	A24
MDQ[9]	A23
MDQS[0]	C23
$\overline{\text{MDQS}}[0]$	D24
MDQS[1]	A22
$\overline{\text{MDQS}}[1]$	B22
MDQS[2]	E17
$\overline{\text{MDQS}}[2]$	C18
MDQS[3]	B16
$\overline{\text{MDQS}}[3]$	A17
MDQS[4]	K5
$\overline{\text{MDQS}}[4]$	J5
MDQS[5]	D2
$\overline{\text{MDQS}}[5]$	C1
MDQS[6]	M3
$\overline{\text{MDQS}}[6]$	M4
MDQS[7]	P2
$\overline{\text{MDQS}}[7]$	M2
MDQS[8]	D13
$\overline{\text{MDQS}}[8]$	E13
MDVAL	Y8
MECC[0]	G12
MECC[1]	D14
MECC[2]	F11
MECC[3]	C11
MECC[4]	G14
MECC[5]	F14
MECC[6]	C13
MECC[7]	D12
MODT[0]	E5
MODT[1]	H7
MODT[2]	E6

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
MODT[3]	F6
MRAS	C5
MSRCID[0]	Y7
MSRCID[1]	W9
MSRCID[2]	AA9
MSRCID[3]	AB6
MSRCID[4]	AD5
MVREF	A28
$\overline{\text{MWE}}$	B4
NC	C19
NC	D7
NC	D10
NC	K13
NC	L6
NC	K9
NC	B6
NC	F12
NC	J7
NC	M19
NC	M25
NC	N19
NC	N24
NC	P19
NC	R19
NC	AB19
NC	T12
NC	W3
NC	M12
NC	W5
NC	P12
NC	T19
NC	W1
NC	W7

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
NC	L13
NC	U19
NC	W4
NC	V8
NC	V9
NC	V10
NC	V11
NC	V12
NC	V13
NC	V14
NC	V15
NC	V16
NC	V17
NC	V18
NC	V19
NC	W2
NC	W6
NC	W8
NC	T11
NC	U11
NC	W12
NC	W13
NC	W14
NC	W15
NC	W16
NC	W17
NC	W18
NC	W19
NC	W27
NC	V25
NC	Y17
NC	Y18
NC	Y19

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
NC	AA18
NC	AA19
NC	AB20
NC	AB21
NC	AB22
NC	AB23
NC	J9
OVDD	Y16
OVDD	AB7
OVDD	AB10
OVDD	AB13
OVDD	AC6
OVDD	AC18
OVDD	AD9
OVDD	AD11
OVDD	AE13
OVDD	AD15
OVDD	AD20
OVDD	AE5
OVDD	AE22
OVDD	AF10
OVDD	AF20
OVDD	AF24
OVDD	AF27
PCI1_AD[0]	AA16
PCI1_AD[1]	AB18
PCI1_AD[10]	AD16
PCI1_AD[11]	AA15
PCI1_AD[12]	AB15
PCI1_AD[13]	AC15
PCI1_AD[14]	AE15
PCI1_AD[15]	Y14
PCI1_AD[16]	AE11

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
PCI1_AD[17]	AF12
PCI1_AD[18]	AC12
PCI1_AD[19]	AB12
PCI1_AD[2]	AB17
PCI1_AD[20]	AB11
PCI1_AD[21]	AC11
PCI1_AD[22]	AE10
PCI1_AD[23]	AD10
PCI1_AD[24]	AE9
PCI1_AD[25]	AC9
PCI1_AD[26]	AB9
PCI1_AD[27]	AG12
PCI1_AD[28]	AH12
PCI1_AD[29]	AF8
PCI1_AD[3]	AD19
PCI1_AD[30]	AD8
PCI1_AD[31]	AE8
PCI1_AD[4]	AE19
PCI1_AD[5]	AC17
PCI1_AD[6]	AE18
PCI1_AD[7]	AF18
PCI1_AD[8]	AB16
PCI1_AD[9]	Y15
$\overline{\text{PCI1\_C\_BE}}[0]$	AD17
$\overline{\text{PCI1\_C\_BE}}[1]$	AA14
$\overline{\text{PCI1\_C\_BE}}[2]$	AE12
$\overline{\text{PCI1\_C\_BE}}[3]$	AC10
PCI1_CLK	AH26
$\overline{\text{PCI1\_DEVSEL}}$	AC13
$\overline{\text{PCI1\_FRAME}}$	AD12
$\overline{\text{PCI1\_GNT}}[0]$	AE6
$\overline{\text{PCI1\_GNT}}[1]$	AC8
$\overline{\text{PCI1\_GNT}}[2]$	AH11

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
$\overline{\text{PCI1\_GNT}}[3]$	AG11
$\overline{\text{PCI1\_GNT}}[4]$	AE7
PCI1_IDSEL	AG6
$\overline{\text{PCI1\_IRDY}}$	AF13
PCI1_PAR	AB14
$\overline{\text{PCI1\_PERR}}$	AE14
$\overline{\text{PCI1\_REQ}}[0]$	AB8
$\overline{\text{PCI1\_REQ}}[1]$	AD6
$\overline{\text{PCI1\_REQ}}[2]$	AH10
$\overline{\text{PCI1\_REQ}}[3]$	AG10
$\overline{\text{PCI1\_REQ}}[4]$	AF9
$\overline{\text{PCI1\_SERR}}$	AC14
$\overline{\text{PCI1\_STOP}}$	AA13
$\overline{\text{PCI1\_TRDY}}$	AD13
RTC	AF15
SD1_IMP_CAL_RX	M26
SD1_IMP_CAL_TX	AE28
SD1_PLL_TPA	V26
SD1_PLL_TPD	V28
SD1_REF_CLK	U28
$\overline{\text{SD1\_REF\_CLK}}$	U27
SD1_RX[0]	N28
$\overline{\text{SD1\_RX}}[0]$	N27
SD1_RX[1]	P26
$\overline{\text{SD1\_RX}}[1]$	P25
SD1_RX[2]	R28
$\overline{\text{SD1\_RX}}[2]$	R27
SD1_RX[3]	T26
$\overline{\text{SD1\_RX}}[3]$	T25
SD1_RX[4]	Y26
$\overline{\text{SD1\_RX}}[4]$	Y25
SD1_RX[5]	AA28
$\overline{\text{SD1\_RX}}[5]$	AA27

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
SD1_RX[6]	AB26
$\overline{\text{SD1\_RX}}[6]$	AB25
SD1_RX[7]	AC28
$\overline{\text{SD1\_RX}}[7]$	AC27
SD1_TST_CLK	T22
$\overline{\text{SD1\_TST\_CLK}}$	T23
SD1_TX[0]	M23
$\overline{\text{SD1\_TX}}[0]$	M22
SD1_TX[1]	N21
$\overline{\text{SD1\_TX}}[1]$	N20
SD1_TX[2]	P23
$\overline{\text{SD1\_TX}}[2]$	P22
SD1_TX[3]	R21
$\overline{\text{SD1\_TX}}[3]$	R20
SD1_TX[4]	U21
$\overline{\text{SD1\_TX}}[4]$	U20
SD1_TX[5]	V23
$\overline{\text{SD1\_TX}}[5]$	V22
SD1_TX[6]	W21
$\overline{\text{SD1\_TX}}[6]$	W20
SD1_TX[7]	Y23
$\overline{\text{SD1\_TX}}[7]$	Y22
SD2_IMP_CAL_RX	AH3
SD2_IMP_CAL_TX	Y1
SD2_PLL_TPA	AH1
SD2_PLL_TPD	AG3
SD2_REF_CLK	AE2
$\overline{\text{SD2\_REF\_CLK}}$	AF2
SD2_RX[0]	AD26
$\overline{\text{SD2\_RX}}[0]$	AD25
SD2_RX[2]	AD1
$\overline{\text{SD2\_RX}}[2]$	AC1
SD2_RX[3]	AB2

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
$\overline{\text{SD2\_RX}}[3]$	AA2
SD2_TST_CLK	AG4
$\overline{\text{SD2\_TST\_CLK}}$	AF4
SD2_TX[0]	AA21
$\overline{\text{SD2\_TX}}[0]$	AA20
SD2_TX[2]	AC4
$\overline{\text{SD2\_TX}}[2]$	AB4
SD2_TX[3]	AA5
$\overline{\text{SD2\_TX}}[3]$	Y5
SENSEVDD	W11
SENSEVSS	W10
SGND_SRDS	M28
SGND_SRDS	N26
SGND_SRDS	P24
SGND_SRDS	P27
SGND_SRDS	R25
SGND_SRDS	T28
SGND_SRDS	U24
SGND_SRDS	U26
SGND_SRDS	V24
SGND_SRDS	W25
SGND_SRDS	Y28
SGND_SRDS	AA24
SGND_SRDS	AA26
SGND_SRDS	AB24
SGND_SRDS	AB27
SGND_SRDS	AC24
SGND_SRDS	AD28
SGND_SRDS2	Y2
SGND_SRDS2	AA1
SGND_SRDS2	AB3
SGND_SRDS2	AC2
SGND_SRDS2	AC3

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
SGND_SRDS2	AC25
SGND_SRDS2	AD3
SGND_SRDS2	AD24
SGND_SRDS2	AE3
SGND_SRDS2	AE1
SGND_SRDS2	AE25
SGND_SRDS2	AF3
SGND_SRDS2	AH2
$\overline{\text{SRESET}}$	AG19
SVDD_SRDS	M27
SVDD_SRDS	N25
SVDD_SRDS	P28
SVDD_SRDS	R24
SVDD_SRDS	R26
SVDD_SRDS	T24
SVDD_SRDS	T27
SVDD_SRDS	U25
SVDD_SRDS	W24
SVDD_SRDS	W26
SVDD_SRDS	Y24
SVDD_SRDS	Y27
SVDD_SRDS	AA25
SVDD_SRDS	AB28
SVDD_SRDS	AD27
SVDD_SRDS2	AB1
SVDD_SRDS2	AC26
SVDD_SRDS2	AD2
SVDD_SRDS2	AE26
SVDD_SRDS2	AG2
SYSCLK	AH16
TCK	AG28
TDI	AH28
TDO	AF28

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
TEMP_ANODE	Y3
TEMP_CATHODE	AA3
TEST_IN	A13
TEST_OUT	A6
$\overline{\text{TEST\_SEL}}$	AH13
TMS	AH27
TRIG_IN	AC5
TRIG_OUT/READY/ $\overline{\text{QUIESCE}}$	AB5
$\overline{\text{TRST}}$	AH22
TSEC1_COL	R5
TSEC1_CRS	T4
TSEC1_GTX_CLK	T1
TSEC1_RX_CLK	V7
TSEC1_RX_DV	U7
TSEC1_RX_ER	R9
TSEC1_RXD[0]	T6
TSEC1_RXD[1]	T7
TSEC1_RXD[2]	T8
TSEC1_RXD[3]	U8
TSEC1_RXD[4]	T9
TSEC1_RXD[5]	T10
TSEC1_RXD[6]	U9
TSEC1_RXD[7]	U10
TSEC1_TX_CLK	V6
TSEC1_TX_EN	U4
TSEC1_TX_ER	T3
TSEC1_TXD[0]	U1
TSEC1_TXD[1]	U2
TSEC1_TXD[2]	V1
TSEC1_TXD[3]	V2
TSEC1_TXD[4]	V3
TSEC1_TXD[5]	V5
TSEC1_TXD[6]	U5

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
TSEC1_TXD[7]	T5
TSEC3_COL	M9
TSEC3_CRS	L9
TSEC3_GTX_CLK	R7
TSEC3_RX_CLK	P9
TSEC3_RX_DV	P8
TSEC3_RX_ER	R11
TSEC3_RXD[0]	P10
TSEC3_RXD[1]	N9
TSEC3_RXD[2]	N10
TSEC3_RXD[3]	R8
TSEC3_RXD[4]	L11
TSEC3_RXD[5]	M11
TSEC3_RXD[6]	N11
TSEC3_RXD[7]	P11
TSEC3_TX_CLK	L10
TSEC3_TX_EN	N6
TSEC3_TX_ER	L8
TSEC3_TXD[0]	M6
TSEC3_TXD[1]	P6
TSEC3_TXD[2]	R6
TSEC3_TXD[3]	L7
TSEC3_TXD[4]	M8
TSEC3_TXD[5]	P7
TSEC3_TXD[6]	N7
TSEC3_TXD[7]	M7
TVDD	N8
TVDD	R10
$\overline{\text{UART\_CTS}}[0]$	AH8
$\overline{\text{UART\_CTS}}[1]$	AF6
$\overline{\text{UART\_RTS}}[0]$	AG8
$\overline{\text{UART\_RTS}}[1]$	AG9
UART_SIN[0]	AG7

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
UART_SIN[1]	AH6
UART_SOUT[0]	AH7
UART_SOUT[1]	AF7
$\overline{UDE}$	AH15
VDD	L16
VDD	L14
VDD	M13
VDD	M15
VDD	M17
VDD	N12
VDD	N14
VDD	N16
VDD	N18
VDD	P13
VDD	P15
VDD	P17
VDD	R12
VDD	R14
VDD	R16
VDD	R18
VDD	T13
VDD	T15
VDD	T17
VDD	U12
VDD	U14
VDD	U16
VDD	U18
XGND_SRDS	M20
XGND_SRDS	M24
XGND_SRDS	N22
XGND_SRDS	P21
XGND_SRDS	R23
XGND_SRDS	T21

**Table 8. Pin List—By Signal (continued)**

Signal	Pin
XGND_SRDS	U22
XGND_SRDS	V20
XGND_SRDS	W23
XGND_SRDS	Y21
XGND_SRDS2	Y4
XGND_SRDS2	AA4
XGND_SRDS2	AA22
XGND_SRDS2	AD4
XGND_SRDS2	AE4
XGND_SRDS2	AH4
XVDD_SRDS	M21
XVDD_SRDS	N23
XVDD_SRDS	P20
XVDD_SRDS	R22
XVDD_SRDS	T20
XVDD_SRDS	U23
XVDD_SRDS	V21
XVDD_SRDS	W22
XVDD_SRDS	Y20
XVDD_SRDS2	Y6
XVDD_SRDS2	AA6
XVDD_SRDS2	AA23
XVDD_SRDS2	AF5
XVDD_SRDS2	AG5

**Table 9. Pin List—By Pin Number**

Signal	Pin
MDQ[44]	A2
GND	A3
MBA[0]	A4
MA[10]	A5
TEST_OUT	A6
GND	A7
MCK[3]	A8
MCK[0]	A9
MA[3]	A10
MA[6]	A11
MA[11]	A12
TEST_IN	A13
GND	A14
MDQ[26]	A15
MDQ[30]	A16
$\overline{\text{MDQS}}[3]$	A17
MDQ[25]	A18
MDQ[29]	A19
MDQ[11]	A20
MDQ[15]	A21
MDQS[1]	A22
MDQ[9]	A23
MDQ[8]	A24
MDQ[12]	A25
MDQ[0]	A26
GND	A27
MVREF	A28
GVDD	B1
MDQ[40]	B2
MDQ[45]	B3
$\overline{\text{MWE}}$	B4
MBA[1]	B5
NC	B6

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
MA[0]	B7
$\overline{\text{MCK}}[3]$	B8
$\overline{\text{MCK}}[0]$	B9
GND	B10
GVDD	B11
MA[9]	B12
MBA[2]	B13
MDQ[27]	B14
MDQ[31]	B15
MDQS[3]	B16
MDM[3]	B17
MDQ[24]	B18
MDQ[28]	B19
MDQ[10]	B20
MDQ[14]	B21
$\overline{\text{MDQS}}[1]$	B22
MDM[1]	B23
MDQ[13]	B24
MDQ[5]	B25
MDQ[1]	B26
LDP[2]	B27
GND	B28
$\overline{\text{MDQS}}[5]$	C1
MDM[5]	C2
MDQ[41]	C3
$\overline{\text{MCS}}[2]$	C4
$\overline{\text{MRAS}}$	C5
GND	C6
GVDD	C7
MA[2]	C8
GVDD	C9
MA[5]	C10
MECC[3]	C11



**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
GND	C12
MECC[6]	C13
GVDD	C14
GND	C15
MDQ[19]	C16
GVDD	C17
$\overline{\text{MDQS}}[2]$	C18
NC	C19
GND	C20
GVDD	C21
MDQ[2]	C22
MDQS[0]	C23
GVDD	C24
MDM[0]	C25
LAD[25]	C26
GND	C27
AVDD_LBIU	C28
MDQ[32]	D1
MDQS[5]	D2
$\overline{\text{MCS}}[0]$	D3
GVDD	D4
GND	D5
GVDD	D6
NC	D7
GND	D8
MA[4]	D9
NC	D10
MA[12]	D11
MECC[7]	D12
MDQS[8]	D13
MECC[1]	D14
GVDD	D15
MDQ[23]	D16

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
GND	D17
MDM[2]	D18
MDQ[17]	D19
GVDD	D20
MDQ[3]	D21
MDQ[6]	D22
GND	D23
$\overline{\text{MDQS}}[0]$	D24
MDQ[4]	D25
GND	D26
LSYNC_IN	D27
LSYNC_OUT	D28
MDQ[46]	E1
GVDD	E2
GND	E3
MDQ[36]	E4
MODT[0]	E5
MODT[2]	E6
$\overline{\text{MCAS}}$	E7
GVDD	E8
MA[8]	E9
MA[14]	E10
GVDD	E11
GND	E12
$\overline{\text{MDQS}}[8]$	E13
GVDD	E14
GND	E15
MDQ[18]	E16
MDQS[2]	E17
GVDD	E18
MDQ[16]	E19
GND	E20
MDQ[7]	E21

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
GVDD	E22
LAD[27]	E23
LAD[24]	E24
LDP[3]	E25
LAD[22]	E26
LAD[21]	E27
LAD[20]	E28
MDQ[47]	F1
MDQ[42]	F2
MDQ[33]	F3
GND	F4
GVDD	F5
MODT[3]	F6
MA[13]	F7
GND	F8
MA[7]	F9
MA[15]	F10
MECC[2]	F11
NC	F12
MDM[8]	F13
MECC[5]	F14
GVDD	F15
GND	F16
MDQ[22]	F17
MDQ[21]	F18
MDQ[20]	F19
BVDD	F20
GND	F21
LAD[29]	F22
BVDD	F23
LAD[23]	F24
LAD[19]	F25
LAD[18]	F26

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
GND	F27
LAD[17]	F28
MDQ[34]	G1
MDQ[43]	G2
GVDD	G3
MDM[4]	G4
MDQ[37]	G5
$\overline{\text{MCS}}$ [3]	G6
GVDD	G7
MA[1]	G8
GVDD	G9
MCKE[2]	G10
GVDD	G11
MECC[0]	G12
GND	G13
MECC[4]	G14
GND	G15
$\overline{\text{LCS}}$ [4]	G16
LA[31]	G17
GND	G18
$\overline{\text{LCS}}$ [1]	G19
LGPL2/ $\overline{\text{LOE}}$ / $\overline{\text{LSDRAS}}$	G20
LAD[31]	G21
LAD[30]	G22
LAD[28]	G23
LAD[26]	G24
GND	G25
LAD[16]	G26
LAD[15]	G27
LDP[1]	G28
GND	H1
MDQ[35]	H2
MDQ[38]	H3

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
GND	H4
GVDD	H5
$\overline{\text{MCS}}[1]$	H6
MODT[1]	H7
MCK[5]	H8
MCKE[3]	H9
MCKE[0]	H10
$\overline{\text{MCK}}[1]$	H11
GVDD	H12
$\overline{\text{MCK}}[4]$	H13
GVDD	H14
MDIC[0]	H15
$\overline{\text{LCS5/DMA\_DREQ2}}$	H16
LA[30]	H17
LGPL3/ $\overline{\text{LSDCAS}}$	H18
$\overline{\text{LCS}}[2]$	H19
$\overline{\text{LCS}}[3]$	H20
$\overline{\text{LWE3/LBS3/LSDDQM}}[3]$	H21
$\overline{\text{LWE1/LBS1/LSDDQM}}[1]$	H22
$\overline{\text{LWE2/LBS2/LSDDQM}}[2]$	H23
LCLK[0]	H24
LCLK[2]	H25
BVDD	H26
LAD[14]	H27
LAD[13]	H28
MDQ[56]	J1
MDQ[60]	J2
MDQ[52]	J3
MDQ[39]	J4
$\overline{\text{MDQS}}[4]$	J5
MCK[2]	J6
NC	J7
$\overline{\text{MCK}}[5]$	J8

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
NC	J9
GVDD	J10
MCK[1]	J11
GND	J12
MCK[4]	J13
GND	J14
GND	J15
$\overline{\text{LCS6/DMA\_DACK2}}$	J16
GND	J17
BVDD	J18
BVDD	J19
LGPL0/LSDA10	J20
BVDD	J21
$\overline{\text{LWE0/LBS0/LSDDQM}}[0]$	J22
BVDD	J23
LCLK[1]	J24
LBCTL	J25
LALE	J26
GND	J27
LAD[12]	J28
MDQ[57]	K1
MDQ[61]	K2
GVDD	K3
MDQ[53]	K4
MDQS[4]	K5
$\overline{\text{MCK}}[2]$	K6
GND	K7
GND	K8
NC	K9
MCKE[1]	K10
GND	K11
GVDD	K12
NC	K13

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
GVDD	K14
MDIC[1]	K15
LA[28]	K16
LA[29]	K17
$\overline{\text{LCS}}[0]$	K18
LGPL5	K19
LGPL1/ $\overline{\text{LSDWE}}$	K20
GND	K21
LAD[0]	K22
LAD[3]	K23
LAD[4]	K24
LAD[7]	K25
LDP[0]	K26
LAD[11]	K27
LAD[10]	K28
GND	L1
MDM[7]	L2
MDM[6]	L3
MDQ[49]	L4
MDQ[48]	L5
NC	L6
TSEC3_TXD[3]	L7
TSEC3_TX_ER	L8
TSEC3_CRS	L9
TSEC3_TX_CLK	L10
TSEC3_RXD[4]	L11
GND	L12
NC	L13
VDD	L14
GND	L15
VDD	L16
LCKE	L17
$\overline{\text{LCS}}7/\text{DMA\_DDONE}2$	L18

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
LA[27]	L19
LGPL4/ $\overline{\text{LGT}}\overline{\text{A}}/\text{LUPWAIT}/\text{LPBSE}$	L20
LAD[1]	L21
LAD[2]	L22
BVDD	L23
LAD[5]	L24
LAD[6]	L25
GND	L26
LAD[9]	L27
LAD[8]	L28
GVDD	M1
$\overline{\text{MDQS}}[7]$	M2
MDQS[6]	M3
$\overline{\text{MDQS}}[6]$	M4
GND	M5
TSEC3_TXD[0]	M6
TSEC3_TXD[7]	M7
TSEC3_TXD[4]	M8
TSEC3_COL	M9
GND	M10
TSEC3_RXD[5]	M11
NC	M12
VDD	M13
GND	M14
VDD	M15
GND	M16
VDD	M17
GND	M18
NC	M19
XGND_SRDS	M20
XVDD_SRDS	M21
$\overline{\text{SD}}1\_TX[0]$	M22
SD1_TX[0]	M23

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
XGND_SRDS	M24
NC	M25
SD1_IMP_CAL_RX	M26
SVDD_SRDS	M27
SGND_SRDS	M28
MDQ[62]	N1
GND	N2
MDQ[50]	N3
MDQ[54]	N4
GVDD	N5
TSEC3_TX_EN	N6
TSEC3_TXD[6]	N7
TVDD	N8
TSEC3_RXD[1]	N9
TSEC3_RXD[2]	N10
TSEC3_RXD[6]	N11
VDD	N12
GND	N13
VDD	N14
GND	N15
VDD	N16
GND	N17
VDD	N18
NC	N19
$\overline{\text{SD1\_TX}}[1]$	N20
SD1_TX[1]	N21
XGND_SRDS	N22
XVDD_SRDS	N23
NC	N24
SVDD_SRDS	N25
SGND_SRDS	N26
$\overline{\text{SD1\_RX}}[0]$	N27
SD1_RX[0]	N28

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
MDQ[58]	P1
MDQS[7]	P2
MDQ[51]	P3
MDQ[55]	P4
GND	P5
TSEC3_TXD[1]	P6
TSEC3_TXD[5]	P7
TSEC3_RX_DV	P8
TSEC3_RX_CLK	P9
TSEC3_RXD[0]	P10
TSEC3_RXD[7]	P11
NC	P12
VDD	P13
GND	P14
VDD	P15
GND	P16
VDD	P17
GND	P18
NC	P19
XVDD_SRDS	P20
XGND_SRDS	P21
$\overline{\text{SD1\_TX}}[2]$	P22
SD1_TX[2]	P23
SGND_SRDS	P24
$\overline{\text{SD1\_RX}}[1]$	P25
SD1_RX[1]	P26
SGND_SRDS	P27
SVDD_SRDS	P28
MDQ[59]	R1
MDQ[63]	R2
GVDD	R3
LVDD	R4
TSEC1_COL	R5

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
TSEC3_TXD[2]	R6
TSEC3_GTX_CLK	R7
TSEC3_RXD[3]	R8
TSEC1_RX_ER	R9
TVDD	R10
TSEC3_RX_ER	R11
VDD	R12
GND	R13
VDD	R14
GND	R15
VDD	R16
GND	R17
VDD	R18
NC	R19
$\overline{\text{SD1\_TX}}[3]$	R20
SD1_TX[3]	R21
XVDD_SRDS	R22
XGND_SRDS	R23
SVDD_SRDS	R24
SGND_SRDS	R25
SVDD_SRDS	R26
$\overline{\text{SD1\_RX}}[2]$	R27
SD1_RX[2]	R28
TSEC1_GTX_CLK	T1
EC_GTX_CLK125	T2
TSEC1_TX_ER	T3
TSEC1_CRS	T4
TSEC1_TXD[7]	T5
TSEC1_RXD[0]	T6
TSEC1_RXD[1]	T7
TSEC1_RXD[2]	T8
TSEC1_RXD[4]	T9
TSEC1_RXD[5]	T10

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
NC	T11
NC	T12
VDD	T13
GND	T14
VDD	T15
GND	T16
VDD	T17
GND	T18
NC	T19
XVDD_SRDS	T20
XGND_SRDS	T21
SD1_TST_CLK	T22
$\overline{\text{SD1\_TST\_CLK}}$	T23
SVDD_SRDS	T24
$\overline{\text{SD1\_RX}}[3]$	T25
SD1_RX[3]	T26
SVDD_SRDS	T27
SGND_SRDS	T28
TSEC1_TXD[0]	U1
TSEC1_TXD[1]	U2
LVDD	U3
TSEC1_TX_EN	U4
TSEC1_TXD[6]	U5
GND	U6
TSEC1_RX_DV	U7
TSEC1_RXD[3]	U8
TSEC1_RXD[6]	U9
TSEC1_RXD[7]	U10
NC	U11
VDD	U12
GND	U13
VDD	U14
GND	U15

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
VDD	U16
GND	U17
VDD	U18
NC	U19
$\overline{\text{SD1\_TX}}[4]$	U20
SD1_TX[4]	U21
XGND_SRDS	U22
XVDD_SRDS	U23
SGND_SRDS	U24
SVDD_SRDS	U25
SGND_SRDS	U26
$\overline{\text{SD1\_REF\_CLK}}$	U27
SD1_REF_CLK	U28
TSEC1_TXD[2]	V1
TSEC1_TXD[3]	V2
TSEC1_TXD[4]	V3
GND	V4
TSEC1_TXD[5]	V5
TSEC1_TX_CLK	V6
TSEC1_RX_CLK	V7
NC	V8
NC	V9
NC	V10
NC	V11
NC	V12
NC	V13
NC	V14
NC	V15
NC	V16
NC	V17
NC	V18
NC	V19
XGND_SRDS	V20

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
XVDD_SRDS	V21
$\overline{\text{SD1\_TX}}[5]$	V22
SD1_TX[5]	V23
SGND_SRDS	V24
NC	V25
SD1_PLL_TPA	V26
AGND_SRDS	V27
SD1_PLL_TPD	V28
NC	W1
NC	W2
NC	W3
NC	W4
NC	W5
NC	W6
NC	W7
NC	W8
MSRCID[1]	W9
SENSEVSS	W10
SENSEVDD	W11
NC	W12
NC	W13
NC	W14
NC	W15
NC	W16
NC	W17
NC	W18
NC	W19
$\overline{\text{SD1\_TX}}[6]$	W20
SD1_TX[6]	W21
XVDD_SRDS	W22
XGND_SRDS	W23
SVDD_SRDS	W24
SGND_SRDS	W25

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
SVDD_SRDS	W26
NC	W27
AVDD_SRDS	W28
SD2_IMP_CAL_TX	Y1
SGND_SRDS2	Y2
TEMP_ANODE	Y3
XGND_SRDS2	Y4
$\overline{\text{SD2\_TX}}[3]$	Y5
XVDD_SRDS2	Y6
MSRCID[0]	Y7
MDVAL	Y8
EC_MDIO	Y9
GND	Y10
$\overline{\text{DMA\_DDONE}}[1]$	Y11
$\overline{\text{DMA\_DACK}}[1]$	Y12
$\overline{\text{DMA\_DACK}}[0]$	Y13
PCI1_AD[15]	Y14
PCI1_AD[9]	Y15
OVDD	Y16
NC	Y17
NC	Y18
NC	Y19
XVDD_SRDS	Y20
XGND_SRDS	Y21
$\overline{\text{SD1\_TX}}[7]$	Y22
SD1_TX[7]	Y23
SVDD_SRDS	Y24
$\overline{\text{SD1\_RX}}[4]$	Y25
SD1_RX[4]	Y26
SVDD_SRDS	Y27
SGND_SRDS	Y28
SGND_SRDS2	AA1
$\overline{\text{SD2\_RX}}[3]$	AA2

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
TEMP_CATHODE	AA3
XGND_SRDS2	AA4
SD2_TX[3]	AA5
XVDD_SRDS2	AA6
$\overline{\text{DMA\_DDONE}}[0]$	AA7
GND	AA8
MSRCID[2]	AA9
$\overline{\text{DMA\_DREQ}}[0]$	AA10
$\overline{\text{DMA\_DREQ}}[1]$	AA11
$\overline{\text{CKSTP\_OUT}}$	AA12
$\overline{\text{PCI1\_STOP}}$	AA13
PCI1_C_BE[1]	AA14
PCI1_AD[11]	AA15
PCI1_AD[0]	AA16
GND	AA17
NC	AA18
NC	AA19
$\overline{\text{SD2\_TX}}[0]$	AA20
SD2_TX[0]	AA21
XGND_SRDS2	AA22
XVDD_SRDS2	AA23
SGND_SRDS	AA24
SVDD_SRDS	AA25
SGND_SRDS	AA26
$\overline{\text{SD1\_RX}}[5]$	AA27
SD1_RX[5]	AA28
SVDD_SRDS2	AB1
SD2_RX[3]	AB2
SGND_SRDS2	AB3
$\overline{\text{SD2\_TX}}[2]$	AB4
TRIG_OUT/READY/QUIESCE	AB5
MSRCID[3]	AB6
OVDD	AB7



**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
$\overline{\text{PCI1\_REQ}}[0]$	AB8
PCI1_AD[26]	AB9
OVDD	AB10
PCI1_AD[20]	AB11
PCI1_AD[19]	AB12
OVDD	AB13
PCI1_PAR	AB14
PCI1_AD[12]	AB15
PCI1_AD[8]	AB16
PCI1_AD[2]	AB17
PCI1_AD[1]	AB18
NC	AB19
NC	AB20
NC	AB21
NC	AB22
NC	AB23
SGND_SRDS	AB24
$\overline{\text{SD1\_RX}}[6]$	AB25
SD1_RX[6]	AB26
SGND_SRDS	AB27
SVDD_SRDS	AB28
$\overline{\text{SD2\_RX}}[2]$	AC1
SGND_SRDS2	AC2
SGND_SRDS2	AC3
SD2_TX[2]	AC4
TRIG_IN	AC5
OVDD	AC6
EC_MDC	AC7
$\overline{\text{PCI1\_GNT}}[1]$	AC8
PCI1_AD[25]	AC9
PCI1_C_BE[3]	AC10
PCI1_AD[21]	AC11
PCI1_AD[18]	AC12

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
$\overline{\text{PCI1\_DEVSEL}}$	AC13
$\overline{\text{PCI1\_SERR}}$	AC14
PCI1_AD[13]	AC15
GND	AC16
PCI1_AD[5]	AC17
OVDD	AC18
IRQ[8]	AC19
L1_TSTCLK	AC20
GND	AC21
IRQ[7]	AC22
IRQ[6]	AC23
SGND_SRDS	AC24
SGND_SRDS2	AC25
SVDD_SRDS2	AC26
$\overline{\text{SD1\_RX}}[7]$	AC27
SD1_RX[7]	AC28
SD2_RX[2]	AD1
SVDD_SRDS2	AD2
SGND_SRDS2	AD3
XGND_SRDS2	AD4
MSRCID[4]	AD5
$\overline{\text{PCI1\_REQ}}[1]$	AD6
GND	AD7
PCI1_AD[30]	AD8
OVDD	AD9
PCI1_AD[23]	AD10
OVDD	AD11
$\overline{\text{PCI1\_FRAME}}$	AD12
$\overline{\text{PCI1\_TRDY}}$	AD13
$\overline{\text{IRQ\_OUT}}$	AD14
OVDD	AD15
PCI1_AD[10]	AD16
PCI1_C_BE[0]	AD17

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
GND	AD18
PCI1_AD[3]	AD19
OVDD	AD20
IRQ[2]	AD21
GPIN[4]	AD22
GPIN[2]	AD23
SGND_SRDS2	AD24
$\overline{\text{SD2\_RX}}[0]$	AD25
SD2_RX[0]	AD26
SVDD_SRDS	AD27
SGND_SRDS	AD28
SGND_SRDS2	AE1
SD2_REF_CLK	AE2
SGND_SRDS2	AE3
XGND_SRDS2	AE4
OVDD	AE5
$\overline{\text{PCI1\_GNT}}[0]$	AE6
$\overline{\text{PCI1\_GNT}}[4]$	AE7
PCI1_AD[31]	AE8
PCI1_AD[24]	AE9
PCI1_AD[22]	AE10
PCI1_AD[16]	AE11
$\overline{\text{PCI1\_C\_BE}}[2]$	AE12
OVDD	AE13
$\overline{\text{PCI1\_PERR}}$	AE14
PCI1_AD[14]	AE15
CLK_OUT	AE16
L2_TSTCLK	AE17
PCI1_AD[6]	AE18
PCI1_AD[4]	AE19
GPIN[7]	AE20
GPIN[3]	AE21
OVDD	AE22

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
GND	AE23
IRQ[11]/ $\overline{\text{DMA\_DDONE}}3$	AE24
SGND_SRDS2	AE25
SVDD_SRDS2	AE26
IRQ[10]/ $\overline{\text{DMA\_DACK}}3$	AE27
SD1_IMP_CAL_TX	AE28
AGND_SRDS2	AF1
$\overline{\text{SD2\_REF\_CLK}}$	AF2
SGND_SRDS2	AF3
$\overline{\text{SD2\_TST\_CLK}}$	AF4
XVDD_SRDS2	AF5
$\overline{\text{UART\_CTS}}[1]$	AF6
UART_SOUT[1]	AF7
PCI1_AD[29]	AF8
$\overline{\text{PCI1\_REQ}}[4]$	AF9
OVDD	AF10
GND	AF11
PCI1_AD[17]	AF12
$\overline{\text{PCI1\_IRDY}}$	AF13
GND	AF14
RTC	AF15
IRQ[5]	AF16
IRQ[1]	AF17
PCI1_AD[7]	AF18
IRQ[3]	AF19
OVDD	AF20
GPOUT[4]	AF21
GPOUT[0]	AF22
GPIN[5]	AF23
OVDD	AF24
GPOUT[5]	AF25
GPOUT[7]	AF26
OVDD	AF27

**Table 9. Pin List—By Pin Number (continued)**


Signal	Pin
TDO	AF28
AVDD_SRDS2	AG1
SVDD_SRDS2	AG2
SD2_PLL_TPD	AG3
SD2_TST_CLK	AG4
XVDD_SRDS2	AG5
PCI1_IDSEL	AG6
UART_SIN[0]	AG7
$\overline{\text{UART\_RTS}}[0]$	AG8
$\overline{\text{UART\_RTS}}[1]$	AG9
$\overline{\text{PCI1\_REQ}}[3]$	AG10
$\overline{\text{PCI1\_GNT}}[3]$	AG11
PCI1_AD[27]	AG12
IIC2_SCL	AG13
IIC2_SDA	AG14
$\overline{\text{HRESET\_REQ}}$	AG15
$\overline{\text{HRESET}}$	AG16
IRQ[4]	AG17
$\overline{\text{MCP}}$	AG18
$\overline{\text{SRESET}}$	AG19
IRQ[9]/DMA_DREQ3	AG20
IIC1_SCL	AG21
IRQ[0]	AG22
GND	AG23
GPIN[1]	AG24
GPIN[6]	AG25
GPOUT[6]	AG26
GPOUT[2]	AG27
TCK	AG28
SD2_PLL_TPA	AH1
SGND_SRDS2	AH2
SD2_IMP_CAL_RX	AH3
XGND_SRDS2	AH4

**Table 9. Pin List—By Pin Number (continued)**

Signal	Pin
$\overline{\text{CKSTP\_IN}}$	AH5
UART_SIN[1]	AH6
UART_SOUT[0]	AH7
$\overline{\text{UART\_CTS}}[0]$	AH8
GND	AH9
$\overline{\text{PCI1\_REQ}}[2]$	AH10
$\overline{\text{PCI1\_GNT}}[2]$	AH11
PCI1_AD[28]	AH12
$\overline{\text{TEST\_SEL}}$	AH13
AVDD_CORE	AH14
$\overline{\text{UDE}}$	AH15
SYSCLK	AH16
ASLEEP	AH17
AVDD_PLAT	AH18
$\overline{\text{LSSD\_MODE}}$	AH19
AVDD_PCI1	AH20
IIC1_SDA	AH21
$\overline{\text{TRST}}$	AH22
GPOUT[1]	AH23
GPIN[0]	AH24
GPOUT[3]	AH25
PCI1_CLK	AH26
TMS	AH27
TDI	AH28

# 5 Clocks

Figure 10 shows the internal distribution of clocks.

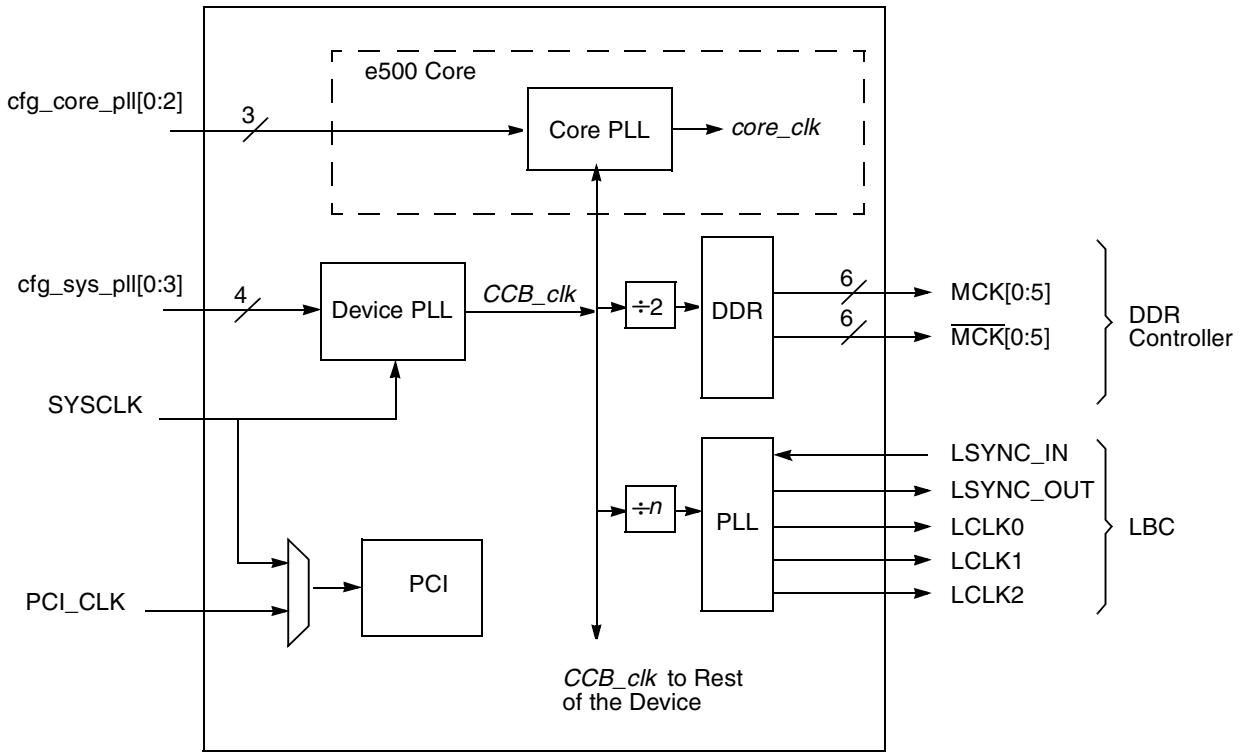

**Figure 10. Clock Subsystem Block Diagram**

The clock inputs for the MPC8544E are the EC\_GTX\_CLK125, PCI1\_CLK, RTC, SD\_REF\_CLK/SD\_REF\_CLK and SYSCLK. The EC\_GTX\_CLK125 input is used by the eTSEC controller as a reference clock for gigabit Ethernet modes. The PCI1\_CLK input are PCI clock input if the PCI controller is configured in asynchronous mode. SD\_REF\_CLK/SD\_REF\_CLK are the reference clocks for PCI-Express and SGMII operating modes. SYSCLK is the primary clock input to the device. Table 10 shows how the clock pins should be connected.

**Table 10. Clock Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
EC_GTX_CLK125	If any of the eTSECs are used in gigabit mode, connect to a 125 MHz clock.	Pull high or low through a 2–10 kΩ resistor to LV <sub>DD</sub> or GND, respectively.
PCI1_CLK	If PCI1 is configured for PCI and isochronous mode, connect to a 16 - 66 MHz clock. If PCI1 is configured for PCI-X and asynchronous mode, connect to a 66 - 133 MHz clock.	Pull high or low through a 2–10 kΩ resistor to OV <sub>DD</sub> or GND, respectively.
RTC	If used, connect to a clock that runs no greater than 1/4 the platform CCB_clk.	Pull high or low through a 2–10 kΩ resistor to OV <sub>DD</sub> or GND, respectively.

**Table 10. Clock Pin Recommendations (continued)**

Pin Name	Pin Used	Pin Not Used
SD_REF_CLK / SD_REF_CLK	If the SerDes is enabled at POR, connect to a clock at the frequency specified per the POR I/O Port Selection.	These pins must be connected to GND.
SYSCLK	This must always be connected to an input clock of 16–133 MHz	

## 5.1 System PLL Ratio

The system PLL inputs, shown in [Table 11](#), establish the clock ratio between the SYSCLK input and the platform clock.

**Table 11. CCB Clock Ratio**

Binary Value of LA[28:31] Signals	CCB:SYSCLK Ratio	Binary Value of LA[28:31] Signals	CCB:SYSCLK Ratio
0000	16:1	1000	8:1
0001	Reserved	1001	9:1
0010	Reserved	1010	10:1
0011	3:1	1011	Reserved
0100	4:1	1100	12:1
0101	5:1	1101	Reserved
0110	6:1	1110	Reserved
0111	Reserved	1111	Reserved

## 5.2 e500 Core PLL Ratio

[Table 12](#) describes the e500 core clock PLL inputs that program the core PLL and establish the ratio between the e500 core clock and the e500 core complex bus (CCB) clock.

**Table 12. e500 Core to CCB Clock Ratio**

Binary Value of LBCTL, LALE, LGPL2 Signals	e500 core: CCB Clock Ratio	Binary Value of LBCTL, LALE, LGPL2 Signals	e500 core: CCB Clock Ratio
000	4:1	100	2:1
001	Reserved	101	5:2
010	Reserved	110	3:1
011	3:2	111	7:2

### 5.3 Security Controller PLL Ratio

The SEC mode frequency configuration allows for CCB CLK:SEC\_CLK ratio of 2:1 or 3:1. Depending on the SEC PLL ratio of 2:1 or 3:1 the serial bit clock frequency of I<sup>2</sup>C (SCL) can be either one -half or one third of the CCB clock respectively.

**Table 13. SEC Frequency Ratio**

Pin Name	Value (Binary)	CCB CLK:SEC CLK
$\overline{\text{LWE}}$	0	2:1 <sup>1</sup>
	1	3:1 <sup>2</sup>

**Notes:**

1. In 2:1 mode the CCB frequency must be operating <= 400 MHz.
2. In 3:1 mode any valid CCB can be used. The 3:1 mode is the default ratio for security block.

## 6 DDR Interface

This section discusses the termination of DDR pins on the device. [Table 14](#) shows how the DDR pins should be connected.

**Table 14. DDR Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
MA[0:15]	Auto-precharge for DDR signaled on A10 when DDR_SDRAM_CFG[PCHB8] = 0. Auto-precharge for DDR signaled on A8 when DDR_SDRAM_CFG[PCHB8] = 1.	These pins may be left unconnected.
MBA[0:2]	—	
MCAS	—	
MCK/ $\overline{\text{MCK}}$ [0:5]	—	
MCKE[0:3]	These pins are actively driven instead of being released to high impedance during reset.	
MCS[0:3]	—	
MDIC[0:1]	MDIC0 is grounded through an 18.2-Ω precision 1% resistor and MDIC1 is connected to GV <sub>DD</sub> through an 18.2-Ω precision 1% resistor. These pins are used for automatic calibration of the DDR I/Os.	
MDM[0:8]	—	These pins may be left unconnected.
MDQ[0:63]	—	
MDQS[0:8] / MDQS[0:8]	—	
MECC[0:7]	—	These pins should be pulled high or low via a 2-10 kΩ resistor.

**Table 14. DDR Pin Recommendations (continued)**

Pin Name	Pin Used	Pin Not Used
MODT[0:3]	—	These pins may be left unconnected.
MRAS	—	
MWE	—	

## 7 Debug and Test Interface

This section discusses the termination of Debug and Test pins on the device. [Table 15](#) shows how the Debug and Test pins should be connected.

**Table 15. Debug and Test Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
ASLEEP	This pin must NOT be pulled down during power-on reset.	This pin may be left unconnected.
CLK_OUT	NOTE: This output is actively driven during reset rather than being three-stated during reset.	This pin may be left unconnected.
MDVAL	—	This pin must be left unconnected.
L1_TSTCLK	These signals must be pulled up via a 100-1000 $\Omega$ resistor to $OV_{DD}$ for normal machine operation.	
L2_TSTCLK		
LSSD_MODE		
MSRCID[0:1]	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state.	This pin must be left unconnected.
MSRCID[2:4]	These pins must NOT be pulled down during power-on reset.	This pin must be left unconnected.
SD1_IMP_CAL_RX	This pin must be pulled down through a 200 $\Omega$ resistor.	
SD1_IMP_CAL_TX	This pin must be pulled down through a 100 $\Omega$ resistor.	
SD1_PLL_TPA	Do not connect.	
SD2_IMP_CAL_RX	This pin must be pulled down through a 200 $\Omega$ resistor.	
SD2_IMP_CAL_TX	This pin must be pulled down through a 100 $\Omega$ resistor.	
SD2_PLL_TPA	Do not connect.	
TEST_SEL	This signal must be pulled up via a 100-1000 $\Omega$ resistor to $OV_{DD}$ for normal machine operation.	
TEMP_ANODE, TEMP_CATHODE	TEMP_ANODE, TEMP_CATHODE are temperature diode pins on the microprocessor that can be used in conjunction with other system temperature monitoring devices (such as Analog Devices, ADT7461™)	These pins may be left unconnected.

**Table 15. Debug and Test Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
TRIG_IN	—	Tie low through a 2–10 kΩ resistor to GND.
TRIG_OUT / READY	This pin must NOT be pulled down during power-on reset.	This pin must be left unconnected.

## 8 DMA Interface

This section discusses the termination of DMA pins on the device. [Table 16](#) shows how the DMA pins should be connected.

**Table 16. DMA Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
$\overline{\text{DMA\_DACK}}[0:1]$	This pin is a reset configuration pin that sets the device derivative. These pins require 4.7 kΩ pull-up or pull-down resistors.	
$\overline{\text{DMA\_DACK2/LCS6}}$	—	If the Local Bus function of this pin is not used, this output pin may be left floating.
$\overline{\text{DMA\_DACK3/IRQ10}}$	—	Pull high or low to the inactive state through a 2–10 kΩ resistor to $\text{OV}_{\text{DD}}$ or GND, respectively.
$\overline{\text{DMA\_DREQ}}[0:1]$	—	Pull high through a 2–10 kΩ resistor to $\text{OV}_{\text{DD}}$ .
$\overline{\text{DMA\_DREQ2/LCS5}}$	—	If the Local Bus function of this pin is not used, this output pin may be left floating.
$\overline{\text{DMA\_DREQ3/IRQ9}}$	—	Pull high or low to the inactive state through a 2–10 kΩ resistor to $\text{OV}_{\text{DD}}$ or GND, respectively.
$\overline{\text{DMA\_DDONE}}[0:1]$	—	These output pins may be left floating.
$\overline{\text{DMA\_DDONE2/LCS7}}$	—	If the Local Bus function of this pin is not used, this output pin may be left floating.
$\overline{\text{DMA\_DDONE3/IRQ11}}$	—	Pull high or low to the inactive state through a 2–10 kΩ resistor to $\text{OV}_{\text{DD}}$ or GND, respectively.

## 9 DUART Interface

This section discusses the termination of DUART pins on the device. [Table 17](#) shows how the DUART pins should be connected.

**Table 17. DUART Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
$\overline{\text{UART\_CTS}}[0:1]$	—	Tie high through a 2–10 kΩ resistor to $\text{OV}_{\text{DD}}$ .
$\overline{\text{UART\_RTS}}[0:1]$	—	These output pins may be left floating.
UART_SIN[0:1]	—	Tie low through a 2–10 kΩ resistor to GND.
UART_SOUT[0:1]	—	These output pins may be left floating.



## 10 Ethernet Management Interface

This section discusses the termination of the Ethernet Management pins on the device. [Table 18](#) shows how the Ethernet Management pins should be connected.

**Table 18. Ethernet Management Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
EC_MDC	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state.	If the POR default is acceptable, this output pin may be left floating.
EC_MDIO	—	Tie high or low through a 2–10 kΩ resistor to OV <sub>DD</sub> or GND, respectively.

## 11 eTSEC Interface

This section discusses the termination of the Ethernet pins on the device. [Table 19](#) shows how the Ethernet pins should be connected.

**Table 19. Ethernet Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
TSEC1_COL	—	Tie low through a 2–10 kΩ resistor to GND.
TSEC3_COL	—	
TSEC1_CRS	—	
TSEC3_CRS	—	
TSEC1_GTX_CLK	—	These output pins may be left floating.
TSEC3_GTX_CLK	—	
TSEC1_RX_CLK	—	Tie high or low through a 2–10 kΩ resistor to LV <sub>DD</sub> or GND, respectively
TSEC3_RX_CLK	—	Tie high or low through a 2–10 kΩ resistor to TV <sub>DD</sub> or GND, respectively.
TSEC1_RX_DV	—	Tie low through a 2–10 kΩ resistor to GND.
TSEC3_RX_DV	—	
TSEC1_RX_ER	—	
TSEC3_RX_ER	—	
TSEC1_RXD[7:0]	—	Tie high or low through a 2–10 kΩ resistor to LV <sub>DD</sub> or GND, respectively.
TSEC3_RXD[7:0]	—	Tie high or low through a 2–10 kΩ resistor to TV <sub>DD</sub> or GND, respectively.
TSEC1_TX_CLK	—	Tie high or low through a 2–10 kΩ resistor to LV <sub>DD</sub> or GND, respectively

**Table 19. Ethernet Pin Recommendations (continued)**

Pin Name	Pin Used	Pin Not Used
TSEC3_TX_CLK	—	Tie high or low through a 2–10 kΩ resistor to TV <sub>DD</sub> or GND, respectively.
TSEC1_TX_EN	These pins require an external 4.7 kΩ pull-down resistor to prevent PHY from seeing a valid Transmit Enable before it is actively driven (during reset).	These output pins may be left floating.
TSEC3_TX_EN		
TSEC1_TX_ER	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state.	If the POR default is acceptable, this output pin may be left floating.
TSEC3_TX_ER		
TSEC1_TXD[7:0]	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state.	If the POR default is acceptable, this output pin may be left floating.
TSEC3_TXD[7:0]		

## 12 I<sup>2</sup>C Interface

This section discusses the termination of I<sup>2</sup>C pins on the device. [Table 20](#) shows how the I<sup>2</sup>C pins should be connected.

**Table 20. I<sup>2</sup>C Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
IIC1_SCL	Tie these open-drain signals high through a 1 kΩ resistor to OV <sub>DD</sub> .	Tie high through a 2–10 kΩ resistor to OV <sub>DD</sub> .
IIC2_SCL		
IIC1_SDA		
IIC2_SDA		

## 13 JTAG Interface

Correct operation of the JTAG interface requires configuration of a group of system control pins as demonstrated in [Figure 12](#). Care must be taken to ensure that these pins are maintained at a valid deasserted state under normal operating conditions as most have asynchronous behavior and spurious assertion will give unpredictable results.

Boundary-scan testing is enabled through the JTAG interface signals. The TRST signal is optional in the IEEE Std 1149.1 specification, but it is provided on all processors built on Power Architecture technology. The device requires TRST to be asserted during power-on reset flow to ensure that the JTAG boundary logic does not interfere with normal chip operation. While the TAP controller can be forced to the reset state using only the TCK and TMS signals, generally systems assert TRST during the power-on reset flow. Simply tying TRST to HRESET is not practical because the JTAG interface is also used for accessing the common on-chip processor (COP), which implements the debug interface to the chip.

The COP function of these processors allow a remote computer system (typically, a PC with dedicated hardware and debugging software) to access and control the internal operations of the processor. The COP


interface connects primarily through the JTAG port of the processor, with some additional status monitoring signals. The COP port requires the ability to independently assert  $\overline{\text{HRESET}}$  or  $\overline{\text{TRST}}$  in order to fully control the processor. If the target system has independent reset sources, such as voltage monitors, watchdog timers, power supply failures, or push-button switches, then the COP reset signals must be merged into these signals with logic.

The arrangement shown in [Figure 12](#) allows the COP port to independently assert  $\overline{\text{HRESET}}$  or  $\overline{\text{TRST}}$ , while ensuring that the target can drive  $\overline{\text{HRESET}}$  as well.


The COP interface has a standard header, shown in [Figure 11](#), for connection to the target system, and is based on the 0.025" square-post, 0.100" centered header assembly (often called a Berg header). The connector typically has pin 14 removed as a connector key.

The COP header adds many benefits such as breakpoints, watchpoints, register and memory examination/modification, and other standard debugger features. An inexpensive option can be to leave the COP header unpopulated until needed.

There is no standardized way to number the COP header, so emulator vendors have issued many different pin numbering schemes. Some COP headers are numbered top-to-bottom then left-to-right whereas others use left-to-right then top-to-bottom. Still others number the pins counter-clockwise from pin 1 (as with an IC). Regardless of the numbering scheme, the signal placement recommended in [Figure 11](#) is common to all known emulators.

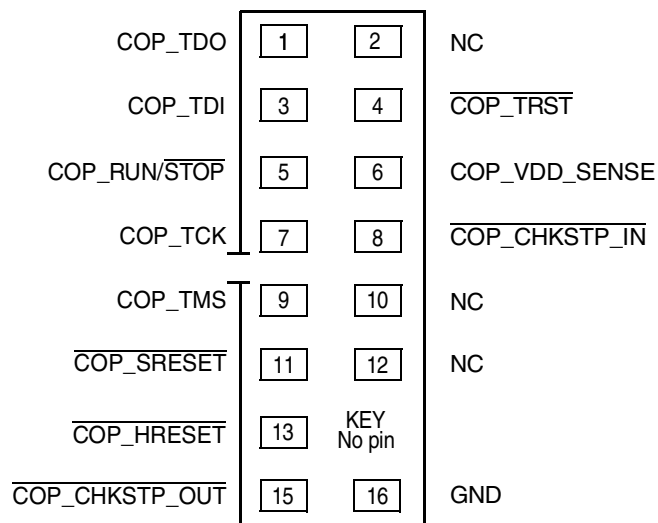

**Figure 11. COP Connector Physical Pinout**

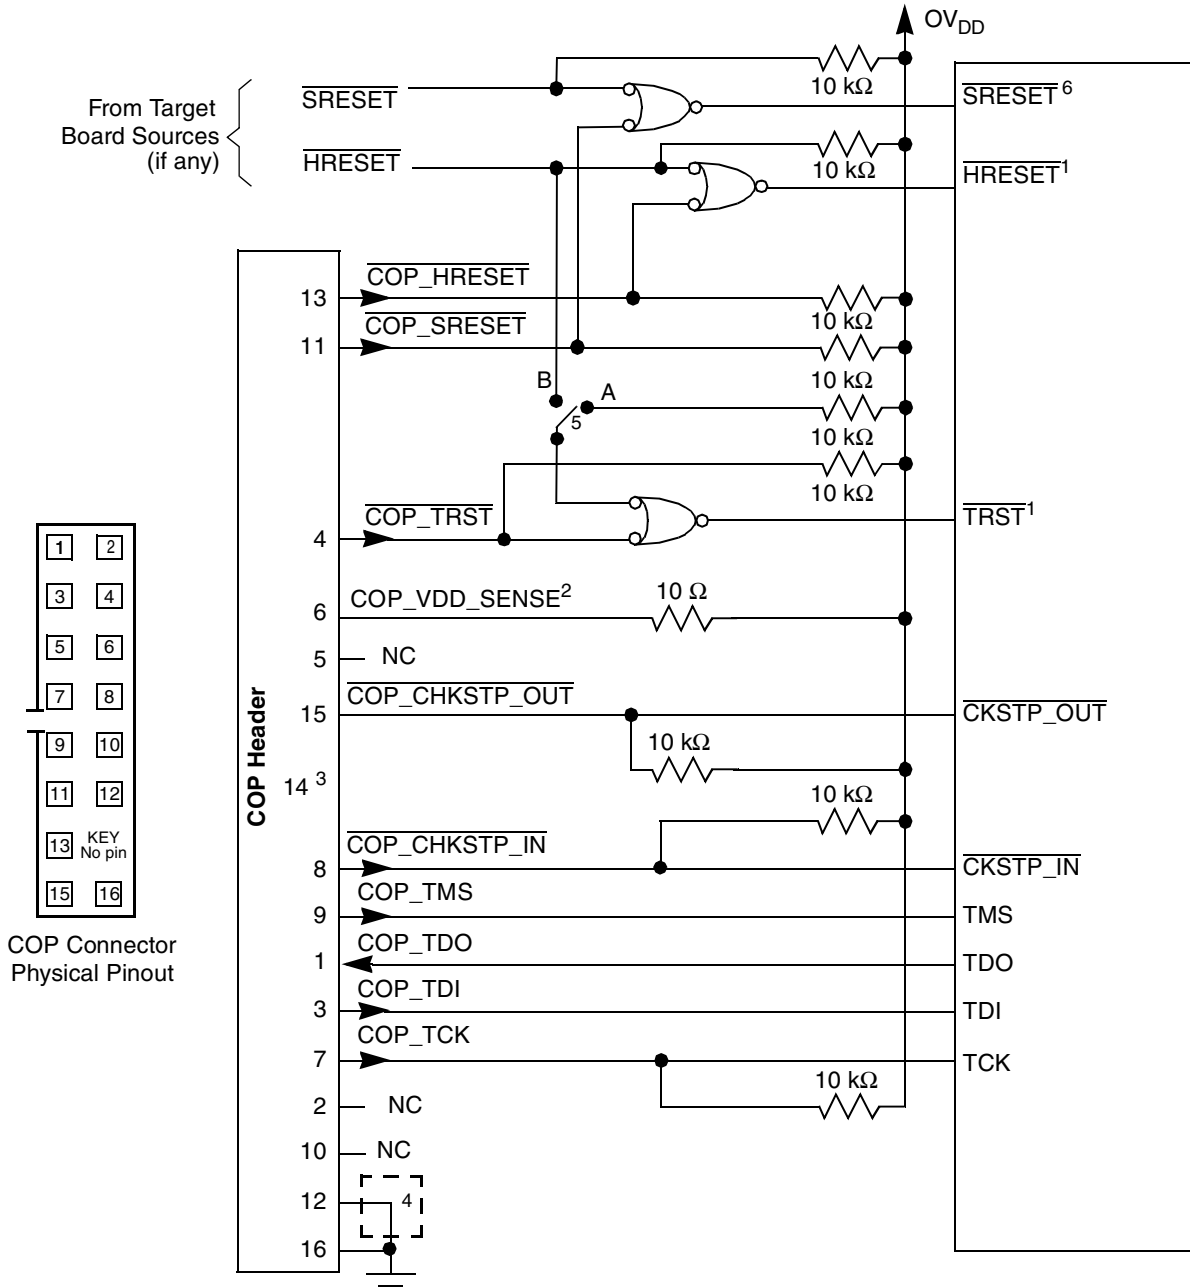

- Notes:**
1. The COP port and target board should be able to independently assert  $\overline{\text{HRESET}}$  and  $\overline{\text{TRST}}$  to the processor in order to fully control the processor as shown here.
  2. Populate this with a 10-Ω resistor for short-circuit/current-limiting protection.
  3. The KEY location (pin 14) is not physically present on the COP header.
  4. Although pin 12 is defined as a No Connect, some debug tools may use pin 12 as an additional GND pin for improved signal integrity.
  5. This switch is included as a precaution for BSDL testing. The switch should be closed to position A during BSDL testing to avoid accidentally asserting the  $\overline{\text{TRST}}$  line. If BSDL testing is not being performed, this switch should be closed to position B.
  6. Asserting  $\overline{\text{SRESET}}$  causes a machine check interrupt to the e500 core.

**Figure 12. JTAG Interface Connection**

### 13.1 Termination of Unused Signals

If the JTAG interface and COP header will not be used, Freescale recommends the following connections:

- $\overline{TRST}$  should be tied to  $\overline{HRESET}$  through a 0 k $\Omega$  isolation resistor so that it is asserted when the system reset signal ( $\overline{HRESET}$ ) is asserted, ensuring that the JTAG scan chain is initialized during the power-on reset flow. Freescale recommends that the COP header be designed into the system as shown in [Figure 12](#). If this is not possible, the isolation resistor will allow future access to  $\overline{TRST}$  in case a JTAG interface may need to be wired onto the system in future debug situations.
- No pull-up/pull-down is required for TDI, TMS, or TDO.

### 13.2 JTAG Pins

[Table 21](#) shows how the JTAG pins should be connected.

**Table 21. JTAG Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
TCK	If COP is used then connect as needed plus strap to OVDD via 10K pull-up.	If COP is unused; Tie TCK to OVDD through a 10 k $\Omega$ resistor. This will prevent TCK from changing state and reading incorrect data into the device.
TDI	This pin has a weak internal pull-up P-FET that are always enabled. Connect to Pin3 of the COP connector	This pin may be left unconnected.
TDO	Connect to Pin1 of the COP connector	This pin may be left unconnected.
TMS	This pin has a weak internal pull-up P-FET that are always enabled. Connect to Pin9 of the COP connector	This pin may be left unconnected.
TRST	This pin has a weak internal pull-up P-FET that are always enabled. Connect to Pin4 of the COP connector and $\overline{HRESET}$ from the board	$\overline{TRST}$ should be tied to $\overline{HRESET}$ through a 0 $\Omega$ resistor.

### 13.3 JTAG Checklist

[Table 22](#) provides a summary POR and reset checklist for the designer.

**Table 22. Checklist for JTAG**

Item	Description	Completed
1.	Connect the JTAG pins to the COP header as shown in <a href="#">Figure 12</a> .	

# 14 Local Bus Interface

This section discusses the termination of Local Bus pins on the device. [Table 23](#) shows how the Local Bus pins should be connected.

**Table 23. Local Bus Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
LA27	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state.	If the POR default is acceptable, this output pin may be left floating.
LA[28:31]	This pin is a reset configuration pin that sets the CCB clock to SYSCLK PLL ratio. These pins require 4.7 kΩ pull-up or pull-down resistors.	
LAD[0:31]	Note that the LSB for the address = LAD[24:31]; however, the MSB for the data is on LAD[0:7].	Tie high or low through a 2–10 kΩ resistor to BV <sub>DD</sub> or GND, respectively, if the general purpose POR configuration is not used.
LALE	This pin is a reset configuration pin that sets the e500 core clock to CCB Clock PLL ratio. These pins require 4.7 kΩ pull-up or pull-down resistors.	
LBCTL		
LCLK[0:2]	—	These output pins may be left floating.
LCKE	—	
LCS[0:4]	—	
LCS5/DMA_DREQ2	—	If the DMA functions of these pins are not used, these output pins may be left floating.
LCS6/DMA_DACK2	—	
LCS7/DMA_DDONE2	—	
LGPL0/LSDA10	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state.	
LGPL1/LSDWE		
LGPL2/LOE/LSDRAS	This pin is a reset configuration pin that sets the e500 core clock to CCB Clock PLL ratio. These pins require 4.7 kΩ pull-up or pull-down resistors.	
LGPL3/LSDCAS	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state.	If the POR default is acceptable, this output pin may be left floating.
LGPL4/LGTA/LUPWAIT/LPBSE	—	This pin either needs to be pulled-up via a 2–10 kΩ resistor to BV <sub>DD</sub> or needs to be reconfigured as LPBSE prior to boot-up.
LGPL5	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state.	If the POR default is acceptable, this output pin may be left floating.
LSYNC_IN	LSYNC_IN needs to be connected via a trace to LSYNC_OUT of length equal to the longest LCK <sub>n</sub> signal used.	
LSYNC_OUT		
		LSYNC_IN needs to be directly connected to LSYNC_OUT.

**Table 23. Local Bus Pin Recommendations (continued)**

Pin Name	Pin Used	Pin Not Used
$\overline{\text{LWE0/LBS0/LSDDQM0}}$	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state.	If the POR defaults are acceptable, these output pins may be left floating.
$\overline{\text{LWE1/LBS1/LSDDQM1}}$		
$\overline{\text{LWE2/LBS2/LSDDQM2}}$		
$\overline{\text{LWE3/LBS3/LSDDQM3}}$		

## 15 PCI Interface

This section discusses the termination of PCI pins on the device.

### 15.1 Unrealized $\overline{\text{RST}}$ Pin

The MPC8544E does not implement for the PCI interface a specific  $\overline{\text{RST}}$  pin separate from the rest of the device pins. Instead, the PCI  $\overline{\text{RST}}$  is realized with the  $\overline{\text{HRESET}}$  input.

### 15.2 PCI Pins

Table 24 shows how the PCI pins should be connected. Unless otherwise noted, unused inputs need be tied to their inactive state through a 2–10 k $\Omega$  resistor, and unused I/Os need be tied high or low through a 2–10 k $\Omega$  resistor to  $\text{OV}_{\text{DD}}$  and GND, respectively.

**Table 24. PCI Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
PCI1_AD[31:0]	—	If PCI arbiter is enabled during POR, All AD pins will be driven to the stable states after POR. Therefore, all ADs pins can be floating. If PCI arbiter is disabled during POR, All AD pins will be in the input state. Therefore, all ADs pins need to be grouped together and tied to $\text{OV}_{\text{DD}}$ through a single (or multiple) 10K ohm resistor(s)
PCI1_AD[31:0]	—	
PCI1_C $\overline{\text{BE}}$ [3:0]	—	Tie high through a 2–10 k $\Omega$ resistor to $\text{OV}_{\text{DD}}$ .
PCI1_CLK	If PCI1 is configured as PCI asynchronous mode, a valid clock must be provided on pin PCI1_CLK, otherwise the processor will not boot up.	Tie high or low through a 2–10 k $\Omega$ resistor to $\text{OV}_{\text{DD}}$ or GND, respectively,
PCI1_DEVSEL	A weak pull-up resistor (2–10 k $\Omega$ ) be placed on this pin to $\text{OV}_{\text{DD}}$ .	
PCI1_FRAME		
PCI1_GNT0	—	Tie high through a 2–10 k $\Omega$ resistor to $\text{OV}_{\text{DD}}$ .

**Table 24. PCI Pin Recommendations (continued)**

Pin Name	Pin Used	Pin Not Used
$\overline{\text{PCI1\_GNT}}[4:1]$	This pin is a reset configuration pin. It has a weak internal pull-up P-FET which is enabled only when the processor is in the reset state. When a PCI block is disabled, either the POR config pin that selects between internal and external arbiter must be pulled down to select external arbiter if there is any other PCI device connected on the PCI bus, or leave the $\text{PCIn\_AD}$ pins as “No Connect” or terminated through 2–10 k $\Omega$ pull-up resistors with the default of internal arbiter if the $\text{PCIn\_AD}$ pins are not connected to any other PCI device. The PCI block will drive the $\text{PCIn\_AD}$ pins if it is configured to be the PCI arbiter—through POR config pins—irrespective of whether it is disabled via the $\text{DEVDISR}$ register or not. It may cause contention if there is any other PCI device connected on the bus.	If the POR defaults are acceptable, these output pins may be left floating.
PCI1_IDSEL	—	Tie low through a 2–10 k $\Omega$ resistor to GND.
PCI1_IRDY	A weak pull-up resistor (2–10 k $\Omega$ ) need be placed on this pin to $\text{OV}_{\text{DD}}$ .	
PCI1_PAR	—	Tie low through a 2–10 k $\Omega$ resistor to GND.
—	—	
PCI1_PERR	A weak pull-up resistor (2–10 k $\Omega$ ) need be placed on this pin to $\text{OV}_{\text{DD}}$ .	
PCI1_REQ0	—	Tie high through a 2–10 k $\Omega$ resistor to $\text{OV}_{\text{DD}}$ .
$\text{PCI1\_REQ}[4:1]$	—	
PCI1_SERR	A weak pull-up resistor (2–10 k $\Omega$ ) need be placed on this pin to $\text{OV}_{\text{DD}}$ .	
PCI1_STOP		
PCI1_TRDY		

## 16 PIC Interface

This section discusses the termination of Programmable Interrupt Controller pins on the device. [Table 25](#) shows how the PIC pins should be connected.

**Table 25. PIC Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
IRQ[0:8]	A weak pull-up or pull-down may be needed to the inactive state.	Tie high or low to the inactive state through a 2–10 k $\Omega$ resistor to $\text{OV}_{\text{DD}}$ or GND, respectively,
$\overline{\text{IRQ9/DMA\_DREQ3}}$		
$\overline{\text{IRQ10/DMA\_DACK3}}$		
$\overline{\text{IRQ11/DMA\_DDONE3}}$		



**Table 25. PIC Pin Recommendations (continued)**

Pin Name	Pin Used	Pin Not Used
IRQ_OUT	Pull high through a 2–10 kΩ resistor to OV <sub>DD</sub> .	
MCP		
UDE		

## 17 SerDes Interface

This section discusses the termination of SerDes pins on the device. [Table 26](#) shows how the SerDes pins should be connected. Note that the SerDes must always have power applied to its supply pins.

**Table 26. SerDes1 Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
SD1_PLL_TPD	Do not connect.	
SD1_PLL_TPA		
SD1_RX[0:7]	—	These pins must be connected to GND.
$\overline{\text{SD1\_RX}}[0:7]$		
SD1_TX[0:7]	—	These pins must be left unconnected.
$\overline{\text{SD1\_TX}}[0:7]$		
SD1_IMP_CAL_RX	This pin must be pulled down through a 200 Ω resistor.	
SD1_IMP_CAL_TX	This pin must be pulled down through a 100 Ω resistor.	
SD1_REF_CLK	—	These pins must be connected to GND.
$\overline{\text{SD1\_REF\_CLK}}$	—	These pins must be connected to GND.
SD1_TST_CLK	Do not connect.	
$\overline{\text{SD1\_TST\_CLK}}$	Do not connect.	

**Table 17-27. SerDes2 Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
SD2_PLL_TPD	Do not connect.	
SD2_PLL_TPA	Do not connect.	
SD2_RX[0]	—	These pins must be connected to GND.
SD2_RX[2]	—	These pins must be connected to GND.
SD2_RX[3]	—	These pins must be connected to GND.
SD2_RX[0]	—	These pins must be connected to GND.
SD2_RX[2]	—	These pins must be connected to GND.
SD2_RX[3]	—	These pins must be connected to GND.

**Table 17-27. SerDes2 Pin Recommendations (continued)**

Pin Name	Pin Used	Pin Not Used
SD2_TX[0]	—	These pins must be left unconnected.
SD2_TX[2]	—	These pins must be left unconnected.
SD2_TX[3]	—	These pins must be left unconnected.
SD2_TX[0]	—	These pins must be left unconnected.
SD2_TX[2]	—	These pins must be left unconnected.
SD2_TX[3]	—	These pins must be left unconnected.
SD2_IMP_CAL_RX	This pin must be pulled down through a 200 $\Omega$ resistor.	
SD2_IMP_CAL_TX	This pin must be pulled down through a 100 $\Omega$ resistor.	
SD2_REF_CLK	—	These pins must be connected to GND.
SD2_REF_CLK	—	These pins must be connected to GND.
SD2_TST_CLK	Do not connect.	
SD2_TST_CLK	Do not connect.	

## 18 System Control

This section discusses the termination of System Control pins on the device. [Table 28](#) shows how the System Control pins should be connected.

**Table 28. System Control Pin Recommendations**

Pin Name	Pin Used	Pin Not Used
CKSTP_IN	Pull high through a 2–10 k $\Omega$ resistor to $OV_{DD}$ . Connect to Pin8 of the COP connector (refer to <a href="#">Figure 12</a> ).	Pull high through a 2–10 k $\Omega$ resistor to $OV_{DD}$ .
CKSTP_OUT	Pull this open-drain signal high through a 2–10 k $\Omega$ resistor to $OV_{DD}$ . Connect to Pin15 of the COP connector (refer to <a href="#">Figure 12</a> ).	Pull high through a 2–10 k $\Omega$ resistor to $OV_{DD}$ .
HRESET	Pull high through a 2–10 k $\Omega$ resistor to $OV_{DD}$ . Connect to Pin13 of the COP connector (refer to <a href="#">Figure 12</a> ).	
HRESET_REQ	Pull high through a 2–10 k $\Omega$ resistor to $OV_{DD}$ . This pin must NOT be pulled down during power-on reset.	This pin must NOT be pulled down during power-on reset.
SRESET	Pull high through a 2–10 k $\Omega$ resistor to $OV_{DD}$ . Connect to Pin11 of the COP connector (refer to <a href="#">Figure 12</a> ).	Pull high through a 2–10 k $\Omega$ resistor to $OV_{DD}$ .

## 19 Spare Configuration Pins

Several pins on the MPC8544E are marked per configuration as shown in [Table 29](#). The spare pins are unused POR config pins. It is highly recommended that the customer provide the capability of setting these pins low (that is, pull-down resistor which is not currently stuffed) in order to support new config options should they arise between revisions.

**Table 29. RESERVED Pin Recommendations**

Pin Name	Pin Number	Comment
EC_MDC	AC7	cfg_spare[0]
TSEC1_TXD[7]	T5	cfg_spare[1]
TSEC1_TXD[3]	V2	cfg_spare[2]
TSEC3_TXD[7]	M7	cfg_spare[3]

## 20 Power and Ground Signals

The MPC8544E has several power supplies. [Table 30](#) shows how the SerDes pins should be connected.

**Table 30. Power and Ground Pin Recommendations**

Pin	Comment
AV <sub>DD</sub> _CORE	Power supply for e500 PLL (1.0 V through a filter).
AV <sub>DD</sub> _LBIU	Power supply for Local Bus PLL (1.0 V through a filter).
AV <sub>DD</sub> _PCI1	Power supply for PCI1 PLL (1.0 V through a filter).
AV <sub>DD</sub> _PLAT	Power supply for core complex bus PLL. (1.0 V through a filter)
AV <sub>DD</sub> _SRDS	Power supply for SerDes PLL (1.0 V through a filter).
AV <sub>DD</sub> _SRDS2	Power supply for SerDes PLL (1.0 V through a filter).
BV <sub>DD</sub>	Power supply for the Local Bus I/Os (1.8 V, 2.5 V / 3.3 V).
GND	—
GV <sub>DD</sub>	Power supply for the DDR I/Os (1.8 V / 2.5 V).
LV <sub>DD</sub>	Power supply for the TSEC1 I/Os (2.5 V / 3.3 V).
MVREF	DDR input reference voltage equal to approximately half of GV <sub>DD</sub>
OV <sub>DD</sub>	Power supply for PCI and other standards' I/Os (3.3 V).
SENSEVDD	This pin is connected to the V <sub>DD</sub> plane internally and may be used by the core power supply to improve tracking and regulation.
SENSEVSS	This pin is connected to the GND plane internally and may be used by the core power supply to improve tracking and regulation.
SV <sub>DD</sub> _SRDS	Power supply for the SerDes 1 transceivers (1.0 V).
SV <sub>DD</sub> _SRDS2	Power supply for the SerDes 2 transceivers (1.0 V).

**Table 30. Power and Ground Pin Recommendations (continued)**

Pin	Comment
XV <sub>DD</sub> _SRDS	Pad Power for SerDes 1 transceivers (1.0 V)
XV <sub>DD</sub> _SRDS2	Pad Power for SerDes 2 transceivers (1.0 V)
XGND_SRDS	SerDes 1 GND
XGND_SRDS2	SerDes 2 GND
AGND_SRDS	SerDes 1 PLL GND
AGND_SRDS2	SerDes 2 PLL GND
TV <sub>DD</sub>	Power supply for the TSEC3 I/Os (2.5 V / 3.3 V).
V <sub>DD</sub>	Power supply the core I/Os (1.0 V).

## 21 Documentation History

Table 31 provides a revision history for this application note.

**Table 31. Document Revision History**

Revision	Date	Substantive Change(s)
2	02/2009	<ul style="list-style-type: none"> <li>Added Table 3, “Estimated I/O Power Dissipation.”</li> <li>Updated Table 28, “System Control Pin Recommendations.”</li> </ul>
1	10/2008	<ul style="list-style-type: none"> <li>Updated Section 4.2, “Pin Map,” to change “top view of the pin map” to “bottom view of the pin map.”</li> </ul>
0	7/2008	<ul style="list-style-type: none"> <li>Initial Release</li> </ul>

**THIS PAGE INTENTIONALLY LEFT BLANK**

## How to Reach Us:

### Home Page:

[www.freescale.com](http://www.freescale.com)

### Web Support:

<http://www.freescale.com/support>

### USA/Europe or Locations Not Listed:

Freescale Semiconductor, Inc.  
 Technical Information Center, EL516  
 2100 East Elliot Road  
 Tempe, Arizona 85284  
 1-800-521-6274 or  
 +1-480-768-2130  
[www.freescale.com/support](http://www.freescale.com/support)

### Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH  
 Technical Information Center  
 Schatzbogen 7  
 81829 Muenchen, Germany  
 +44 1296 380 456 (English)  
 +46 8 52200080 (English)  
 +49 89 92103 559 (German)  
 +33 1 69 35 48 48 (French)  
[www.freescale.com/support](http://www.freescale.com/support)

### Japan:

Freescale Semiconductor Japan Ltd.  
 Headquarters  
 ARCO Tower 15F  
 1-8-1, Shimo-Meguro, Meguro-ku  
 Tokyo 153-0064  
 Japan  
 0120 191014 or  
 +81 3 5437 9125  
[support.japan@freescale.com](mailto:support.japan@freescale.com)

### Asia/Pacific:

Freescale Semiconductor China Ltd.  
 Exchange Building 23F  
 No. 118 Jianguo Road  
 Chaoyang District  
 Beijing 100022  
 China  
 +86 10 5879 8000  
[support.asia@freescale.com](mailto:support.asia@freescale.com)

### For Literature Requests Only:

Freescale Semiconductor  
 Literature Distribution Center  
 P.O. Box 5405  
 Denver, Colorado 80217  
 1-800 441-2447 or  
 +1-303-675-2140  
 Fax: +1-303-675-2150  
[LDCForFreescaleSemiconductor@hibbertgroup.com](mailto:LDCForFreescaleSemiconductor@hibbertgroup.com)

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. The Power Architecture and Power.org word marks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org. IEEE 1149.1 is a registered trademark of the Institute of Electrical and Electronics Engineers, Inc. (IEEE). This product is not endorsed or approved by the IEEE. All other product or service names are the property of their respective owners.

© Freescale Semiconductor, Inc., 2009. All rights reserved.

