


**VDE Test Report**

Report No.	287890-TL2-1	
VDE File No.	5016540-4970-0008/287890	
Date of issue	2021-11-08	
Laboratory	VDE Testing and Certification Institute	
Address.....	Merianstrasse 28 63069 Offenbach/Main; Germany	
Testing location/ address.....	VDE Testing and Certification Institute Merianstrasse 28 63069 Offenbach/Main; Germany	
Applicant's name.....	NXP Semiconductors Czech Republic s.r.o.	
Applicant's address	1. Maje 1009; 756 61 Roznov pod Radhostem; Czech Republic	
Applied standard(s)	DIN EN 60335-1 (VDE 0700-1):2020-08; EN 60335-1:2012+AC+A11+A13+A1+A2+A14:2019 DIN EN 60730-1 (VDE 0631-1):2017-05; EN 60730-1:2016 EN 60730-1:2016/A1:2019 IEC 60335-1:2010 IEC 60335-1:2010/AMD2:2016 IEC 60335-1:2010/AMD1:2013 IEC 60730-1:2013 IEC 60730-1:2013/AMD1:2015 IEC 60730-1:2013/AMD2:2020	
Test item description.....	Peripherals/Common for Micro controllers with CM0+/CM33/CM4/CM7 core	
Trade Mark		
Type reference(s).....	File Name	Revision
	iec60730b_clock.c	4.2
	iec60730b_invariable_memory.c	4.2
	iec60730b_dio.c	4.2
	iec60730b_dio_ext.c	4.2
	iec60730b_aio.c	4.2
	iec60730b_tsi.c	4.2
	IEC60730B_M0_COM_IAR_v4_2.a*	4.2
	IEC60730B_M0_COM_KEIL_v4_2.lib*	4.2
	IEC60730B_M4_M7_COM_IAR_v4_2.a*	4.2
	IEC60730B_M4_M7_COM_KEIL_v4_2.lib*	4.2

Report No.:	287890-TL2-1	Page	1	of	27
Disclaimer:					
This test report contains the result of a singular investigation carried out on the product submitted. A sample of this product was tested to found the accordance with the thereafter listed standards or clauses of standards resp.					
The test report does not entitle for the use of a VDE Certification Mark and considers solely the requirements of the specifications mentioned below.					
Whenever reference is made to this test report towards third party, this test report shall be made available on the very spot in full length.					



	IEC60730B_M33_COM_IAR_v4_2.a*	4.2
	IEC60730B_M33_COM_KEIL_v4_2.lib*	4.2
	libIEC60730B_M0_COM_MCUX_v4_2.a*	4.2
	libIEC60730B_M4_M7_COM_MCUX_v4_2.a*	4.2
	libIEC60730B_M33_COM_MCUX_v4_2.a*	4.2
Remark:	-The files marked with * are object code files. -Revision number of .c source files is stated in the header part of the files.	

Test sample condition.....	<input checked="" type="checkbox"/> Non-damaged sample
	Remark: */*
Sample entry date.....	2021-09-29
Date (s) of performance of tests	2021-09-29 to 2021-10-08

Tested by.....		
Name, Signature.....	J. Schildbach (Authorization of test report)	
Function	Testing engineer	
Verified by.....		
Name, Signature.....	K. Tas	
Function	Technical Certification Officer	

Factory(ies).....	NXP Semiconductors Czech; Republic s.r.o. 1. Maje 1009; 756 61 ROZNOV POD RADHOSTEM CZECH REPUBLIK
-------------------	--

Possible test case verdicts:	
Test case does not apply to the test object :	N/A
Test object does meet the requirement..... :	P (Pass)
Test object does not meet the requirement :	F (Fail)

Final Verdict:	<input checked="" type="checkbox"/> P	<input type="checkbox"/> F
Remark	*/*	



Environmental conditions (if applicable)	Ambient temperature	Atmospheric pressure	Relative humidity
Rated values	15-35 °C	860-1060 hPa	30-60 %
Verified values	N/A	Range confirmed by: Deutscher Wetterdienst (Meteorological service)	N/A

General Remarks:**Conformity statement:**

- Conformity statement is decided in accordance with IEC Guide 115, Procedure 2. (Accuracy method)
- Conformity statement is decided according to the internal procedure. (See table "Measurement uncertainty")

General Remarks:

All self-diagnostic routines are executable after reset and during runtime.

The files referenced under this test report are also suitable for device families with CM0+/CM33/CM4/CM7 core referenced under VDE folders:

- 5016540-4970-0002 for features for devices with ARM CM4 or CM7 core with its actual test report.
- 5016540-4970-0004 for features for devices with ARM CM0+ core with its actual test report.
- 5016540-4970-0005 for features for devices with ARM CM33 core with its actual test report.

Special Details:

The files referenced under this test report support the following cores in reference to the devices as shown by the table below:

Cpu core	List of device families
CM0	K32L2Ax, K32L2Bx, LPC51U68x, LPC80x, LPC82x, LPC84x, MKV1x, MKExx, MKLxx, MKE1xZ, MK32W0x, MKW3x, K32L3Ax
CM33	LPC55xx, LPC55Sxx,
CM4 , CM7	MK2xFxx, MIMXRT117x, MIMX8MNxx, MIMX8MMxx, MIMXRT10xx, MKV3x, MKV4x, MKV5x, MKE1xF, LPC540x, LPC54S0x, MIMXRT116x, K32L3Ax

The file „iec60730b_airo.c” cannot be used for the devices MIMX8MNxx, MIMX8MMxx.

The file “iec60730b_tsi.c” can be used for the device MKE1xZ only.

The file "iec60730b_invariable_memory.c" can be used only for devices with HW CRC module.

**Naming conventions for object code files:**

- Standard** – **IEC60730** (In case of IAR and KEIL) or **libIEC60730** (In case of MCUXpresso)
- Library class** compliance according to the IEC60730 standard - **B**
- The **MCU core** for which, the library was compiled - **M0**, or **M4_M7**, or **M33**
- library for **common** peripheral tests -**COM**
- The type of **compiler/IDE** – **IAR** or **KEIL** or **MCUX**
- Identification of the **library version** – **v4.2**
- **File extension** – differs between IDEs that were used for compilation ***.a** (in case of IAR and MCUXpresso) or ***.lib** (in case of KEIL)

IEC60730B_M0_COM_IAR_v4_2.a


The object code files revision 4.2 can be verified by its SHA-256 Hash-Tag shown by an example on next page as follows:



File Name:	SHA-256 Hash-Tag:
IEC60730B_M0_COM_IAR_v4_2.a	2DC8294AEC295EDC546A8011549743B96A235BFD0F57D0704A70E69A4B54F1DC
IEC60730B_M0_COM_KEIL_v4_2.lib	5CD4C3695E8E5A87F57DE8BB5B78513F672E1E4249317E10020AEFDFC797F6BE
libIEC60730B_M0_COM_MCUX_v4_2.a	6821EB41D89567AC61FFE02FAAF0EB3A9E74E13AEEA1ED99F8A68571263F87E4
IEC60730B_M4_M7_COM_IAR_v4_2.a	D1DEBB7FB08F70B7044F29CCDB9317733B3F667171D25B2FD9A8F0E003CC3D7
IEC60730B_M4_M7_COM_KEIL_v4_2.lib	4F15601A506B0EC95C854FD9596CE6338CB88CF6B80942373778A2DA5BAEFBD3
libIEC60730B_M4_M7_COM_MCUX_v4_2.a	1B8360B37A75ADD1597131BE0EB4B32949BA42EC2BD1D30D00E006FA45A0EA8C
IEC60730B_M33_COM_IAR_v4_2.a	6E767381FF2D3C83EFC11E07BE249C3CCEA986B08C61C3BEC3E9511455D628FC
IEC60730B_M33_COM_KEIL_v4_2.lib	820E5280ACC62E3D1C4FC9C515BD5FD3534DD08448AACAF1A68E8EE E3E4150B2
libIEC60730B_M33_COM_MCUX_v4_2.a	8D6C85AD0641ED3855224A455D503EEAB62FBD0AF96ABEBDF88313970675E0A0

1. Download from internet a utility like “MDS_and_SHA_Checksum_Utility.exe” via the following link:
https://download.cnet.com/MD5-SHA-Checksum-Utility/3000-2092_4-10911445.html.
(Another example is the link https://www.nirsoft.net/utils/hash_my_files.html. Click to “Download HashMyFiles”.)


2. Start the utility.

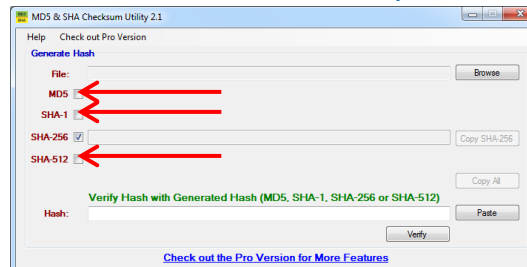

Delete the hooks for “MDS”, “SHA-1” and SHA-512 (see red arrows).




3. In the windows file explorer mark the downloaded object code file and move it the line "File" (see red arrow).

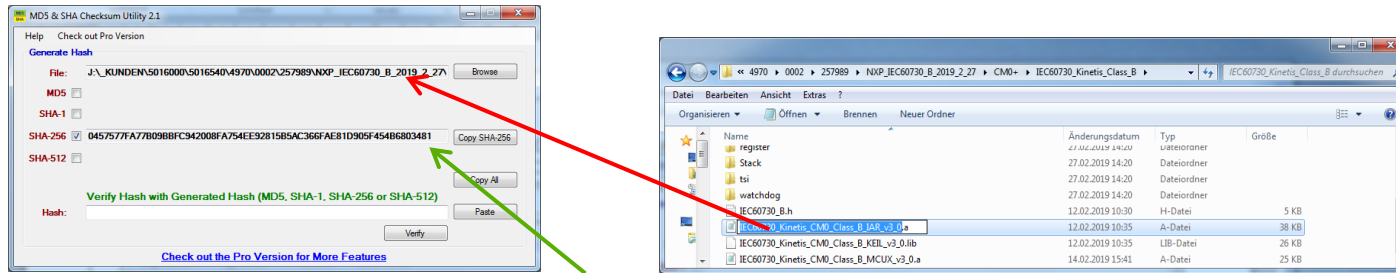


The "SHA-256" Hash-Tag for this file will be generated directly (see green arrow).

4. Copy the corresponding Hash-Tag from this test report and insert it to the line "Hash" (see red arrow).

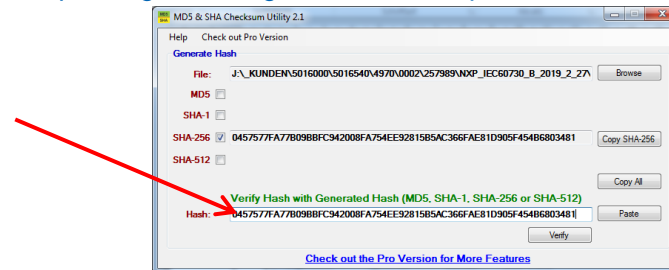

5. Now press the button "Verify". If both Hash-Tags are identically the window below will pop up.

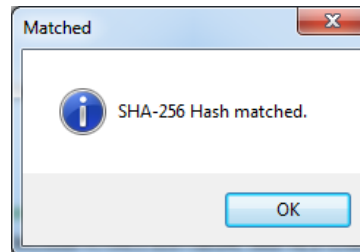



Performed Tests

IEC 60335-1 (Annex R)

Clause	Requirement + Test	Result – Remark	Verdict
R	ANNEX R (NORMATIVE) (60335-1) SOFTWARE EVALUATION		—
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex	Self-test routines for software of class R.1	P
R.1	Programmable electronic circuits using software		—
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		P
R.2	Requirements for the architecture		—
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		P
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:		—
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:		—
	- single channel with functional test		P
	- single channel with periodic self-test		P
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		—
R.2.2.1	When redundant memory with comparison		N/A

Report No.:	287890-TL2-1	Page	7	of	27
-------------	--------------	------	---	----	----

Disclaimer:

This test report contains the result of a singular investigation carried out on the product submitted. A sample of this product was tested to found the accordance with the thereafter listed standards or clauses of standards resp.

The test report does not entitle for the use of a VDE Certification Mark and considers solely the requirements of the specifications mentioned below.

Whenever reference is made to this test report towards third party, this test report shall be made available on the very spot in full length.



	is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate		P
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 is impaired	Self-test routines only; compliance to clause 19 has to be insured by the user of the self-test routines	N/A
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		P
R.2.2.7	Labels used for memory locations are unique		P
R.2.2.8	The software is protected from user alteration of safety-related segments and data		P
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired	Self-test routines only; compliance to clause 19 has to be insured by the user of the self-test routines	N/A
R.3	Measures to avoid errors		—
R.3.1	General		—



	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied		—
	Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1	Class R.1 only	N/A
R.3.2	Specification		—
R.3.2.1	Software safety requirements:	Software Id: 4.2	P
	The specification of the software safety requirements includes the descriptions listed		P
R.3.2.2	Software architecture		—
R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data	IEC60730B_Library_User_Guide_CM0_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM4_CM7_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM33_v4_2.pdf Revision 4.2	P
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		P
R.3.2.3	Module design and coding		—
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		P
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		P
R.3.2.3.2	Software code is structured		P
R.3.2.3.3	Coded software is validated against the module specification by static analysis		P
	The module specification is validated against the architecture specification by static analysis	Reviews and source code walk through	P
R.3.3.3	Software validation		—
	The software is validated with reference to the requirements of the software safety		P



	requirements specification		
	Compliance is checked by simulation of:		—
	- input signals present during normal operation		P
	- anticipated occurrences		P
	- undesired conditions requiring system action		P

**IEC 60730-1 (Software)**

Clause	Requirement + Test	Result - Remark	Verdict
H.6	Classification, additions		—
H.6.18	Class of control function (A, B,C).....		—
H.7	Information in addition to Table 1 provided:		—
	66 - Software sequence documentation; clause: H.11.12.2.9; method: X	Self-diagnostiv modules acc. Table R. 1/H.1 only	N/A
	67 - Program documentation; clause: H.11.12.2.9, H.11.12.2.12; method: X.....		P
	68 - Software fault analysis; clause: H.11.12, H.27.1.1.4; method: X		P
	69 - Software class(es) and structure; clause: H.11.12.2, H.11.12.3, H.27.1.2.2.1, H.27.1.2.3.1; method: D.....		P
	70 - Analytical measures and fault/error control techniques employed; clause: H.11.12.1.2, H.11.12.2.2, H.11.12.2.4; method: X		P
	71 - Software fault/error detection time(s) for controls with software Classes B or C; clause: H.2.17.10, H.11.12.2.6; method: X		P
	72 - Control response(s) in case of detected fault/error; clause: H.11.12.2.7; method: X		P
	93 – Maximum number of reset actions within a time period; clause H.11.12.4.3.6, H.11.12.4.3.4; method: D		N/A
	94 – Number of remote reset actions; clause H.17.1.4.3; method: X		N/A
	m – Controls with software classes B or C had information provided for safety-related segments of the software. Information on the non-safety related segments was sufficient to establish that they did not influence safety-related segments....		N/A
	n – Software sequence was documented and, together with the operating sequence, included a description of the control system philosophy, the control flow, data flow and the timings		N/A



	o - Safety-related data and safety-related segments of the software sequence, the malfunction of which could result in non-compliance with the requirements of Clauses 17, 25, 26 and 27, are identified		P
	– Included the operating sequence		N/A
	– Software fault analysis was related to the hardware fault analysis in Clause H.27.....		N/A
	q - Programming documentation was supplied in a programming design language declared by the manufacturer		P
	r – Different software classes applied to different control functions		N/A
	s - Measures declared are chosen by manufacturer from the requirements of Clauses H.11.12.1.2 to H.11.12.2.4 inclusive.....		N/A
H.11	Constructional requirements		—
H.11.12	Controls using software		—
	Controls using software were so constructed that the software did not impair control compliance with the requirements of this standard		P
H.11.12.1	Requirements for the architecture		—
H.11.12.1.1	Control functions with software class B or C use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software, as detailed in H.11.12.1.2 to H.11.12.3 inclusive		P
H.11.12.1.2	Control functions with software class C have one of the following structures:		—
	– single channel with periodic self-test and monitoring (H.2.16.7)		N/A
	– dual channel (homogenous) with comparison (H.2.16.3)		N/A
	– dual channel (diverse) with comparison (H.2.16.2)		N/A
	Control functions with software class B have one of the following structures:		—
	– single channel with functional test (H.2.16.5)		P
	– single channel with periodic self-test (H.2.16.6)		P



	– dual channel without comparison (H.2.16.1)		N/A
H.11.12.1 .3	Other structure permitted with equivalent level of safety to those in H.11.12.1.2.....		N/A
H.11.12.2	Measures to control faults/errors		—
H.11.12.2 .1	Redundant memory with comparison provided on two areas of the same component: data stored in different formats		N/A
H.11.12.2 .2	Software class C using dual channel structures with comparison: additional fault/error detection means		N/A
H.11.12.2 .3	Software class B or C: means for recognition and control of errors in transmission to external safety-related data paths: Means took into account errors of data, addressing, transmission timing and sequence of protocol		N/A
H.11.12.2 .4	Software class B or C: within the control, measures are taken to address the fault/errors in safety-related segments and data indicated in Table H.1 and identified in Table 1 requirement 68.		P
H.11.12.2 .5	Measures others than those specified in H.11.12.2.4 utilized to satisfy the requirements listed in Table H.1		N/A
H.11.12.2 .6	Software fault/error detection:		—
	– occur not later than declared time(s), Table 1, requirement 71		P
	– acceptability of declared time(s): evaluated during fault analysis of the control		P
H.11.12.2 .7	For controls with functions, classified as Class B or C, detection of fault/error:		—
	– results in the response declared in Table 1, requirement 72		P
	– for Class C: independent means capable of performing this response provided		N/A
H.11.12.2 .8	Class C, dual channel structure, loss of dual channel capability: deemed to be an error		N/A
H.11.12.2 .9	Software referenced:		—



	– to relevant parts of the operating sequence		P
	– to the associated hardware functions		P
H.11.12.2 .10	Labels used for memory locations are unique		P
H.11.12.2 .11	Software protected from user alteration of safety-related segments and data		P
H.11.12.2 .12	Software and safety-related hardware under its control is initialized to and terminates at a declared state, Table 1, requirement 66.....		P
H.11.12.3	Measures to avoid errors		—
H.11.12.3 .1	For controls with software class B or C the measures shown in Figure H.1 to avoid systematic faults are applied		P
	Other methods utilized that incorporate disciplined and structured processes including design and test phases		N/A
H.11.12.3 .2	Specification		—
H.11.12.3 .2.1	Software safety requirements		—
H.11.12.3 .2.1.1	The specification of the software safety requirements includes:		—
	<ul style="list-style-type: none"> • A description of each safety related function to be implemented, including its response time(s): <ul style="list-style-type: none"> - functions related to the application including their related software classes - functions related to the detection, annunciation and management of software or hardware faults 		P
	<ul style="list-style-type: none"> • A description of interfaces between software and hardware 		P
	<ul style="list-style-type: none"> • A description of interfaces between any safety and non-safety related functions 		N/A
H.11.12.3 .2.2	Software architecture		—
H.11.12.3 .2.2.1	The description of software architecture include the following aspects:		—
	<ul style="list-style-type: none"> • Techniques and measures to control software faults/errors (refer to H.11.12.2) 		P



	<ul style="list-style-type: none">Interactions between hardware and software		P
	<ul style="list-style-type: none">Partitioning into modules and their allocation to the specified safety functions		P
	<ul style="list-style-type: none">Hierarchy and call structure of the modules (control flow)		P
	<ul style="list-style-type: none">Interrupt handling		P
	<ul style="list-style-type: none">Data flow and restrictions on data access		P
	<ul style="list-style-type: none">Architecture and storage of data		P
	<ul style="list-style-type: none">Time based dependencies of sequences and data		P
H.11.12.3.2.2	The architecture specification is verified against the specification of the software safety requirements by static analysis		P
H.11.12.3.2.3	Module design and coding		—
H.11.12.3.2.3.1	Software is suitably refined into modules. Software module design and coding are implemented in a way that is traceable to the software architecture and requirements. The module design specified:		P
	– function(s)		P
	– interfaces to other modules		N/A
	– data		P
H.11.12.3.2.3.2	Software code is structured		P
H.11.12.3.2.3.3	Coded software is verified against the module specification, and the module specification is verified against the architecture specification by static analysis		P
H.11.12.3.2.4	Design and coding standards		P
	Program design and coding standards is used during software design and maintenance		P
	Coding standards :		—
	– specified programming practice		P
	– proscribed unsafe language features		P



	– specify procedures for source code documentation		P
	– specify data naming conventions		P
H.11.12.3.3	Testing		—
H.11.12.3.3.1	Module design (software system design, software module design and coding)		—
H.11.12.3.3.1.1	A test concept with suitable test cases is defined based on the module design specification.		P
H.11.12.3.3.1.2	Each software module is tested as specified within the test concept		P
H.11.12.3.3.1.3	Test cases, test data and test results are documented		P
H.11.12.3.3.1.4	Code verification of a software module by static means includes such techniques as software inspections, walk-throughs, static analysis and formal proof		P
	Code verification of a software module by dynamic means includes functional testing, white-box testing and statistical testing		P
H.11.12.3.3.2	Software integration testing		—
H.11.12.3.3.2.1	A test concept with suitable test cases is defined based on the architecture design specification		P
H.11.12.3.3.2.2	The software is tested as specified within the test concept		P
H.11.12.3.3.2.3	Test cases, test data and test results are documented		P
H.11.12.3.3.3	Software validation		—
H.11.12.3.3.3.1	A validation concept with suitable test cases is defined based on the software safety requirements specification		P
H.11.12.3.3.3.2	The software is validated with reference to the requirements of the software safety requirements specification as specified within the validation concept		P
	The software is exercised by simulation or stimulation of:		—



	<ul style="list-style-type: none"> input signals present during normal operation 		P
	<ul style="list-style-type: none"> anticipated occurrences 		P
	<ul style="list-style-type: none"> undesired conditions requiring system action 		P
H.11.12.3 .3.3.4	Test cases, test data and test results are documented		P
H.11.12.3 .4	Other Items		—
H.11.12.3 .4.1	Equipment used for software design, verification and maintenance was qualified appropriately and demonstrated to be suitable for purpose in manifold applications		P
H.11.12.3 .4.2	Management of software versions: All versions are uniquely identified for traceability		P
H.11.12.3 .4.3	Software modification		—
H.11.12.3 .4.3.1	Software modifications are based on a modification request which details the following:		N/A
	<ul style="list-style-type: none"> the hazards which may be affected 		N/A
	<ul style="list-style-type: none"> the proposed change 		N/A
	<ul style="list-style-type: none"> the reasons for change 		N/A
H.11.12.3 .4.3.2	An analysis is carried out to determine the impact of the proposed modification on functional safety.		N/A
H.11.12.3 .4.3.3	A detailed specification for the modification is generated including the necessary activities for verification and validation, such as a definition of suitable test cases		N/A
H.11.12.3 .4.3.4	The modification is carried out as planned		N/A
H.11.12.3 .4.3.5	The assessment of the modification is carried out based on the specified verification and validation activities.		N/A
H.11.12.3 .4.3.6	All details of modification activities are documented		N/A
H.11.12.3 .5	For class C control functions: One of the combinations (a–p) of analytical measures given in the columns of table H.9 is used during hardware development.....		N/A



H.11.12.4	Remotely actuated control functions		—
H.11.12.4.1.1	Data Exchange – General – Remotely actuated control functions are connected to separate, independent devices, which may themselves contain control functions or provide other information and any data exchange between these devices does not compromise the integrity of class B control function or class C control function.		N/A
H.11.12.4.1.2	Type of data - Message types for data exchange in a control function or functions are allocated to class A control function, class B control function or class C control function. The safety or protective relevance or influence, message types or data exchange are allocated only to class B control function or class C control functions, see Table H.10.		N/A
H.11.12.4.1.3.1	Communication of Safety Related Data – Transmission – Safety relevant data is transmitted authentically concerning:		N/A
	– data corruption		N/A
	– address corruption		N/A
	– wrong timing or sequence		N/A
	Data variation or corrupted data did not lead to an unsafe state		N/A
	Before transmitted data was used it was ensured that data corruption, address corruption and wrong timing or sequence are addressed using the measures as given in Annex H.		N/A
	The following failure modes are addressed:		—
	– permanent “auto-sending” or repetition,		N/A
	– interruption of data transfer		N/A
H.11.12.4.1.3.2	Access to data exchange - All types of access to class B control function or class C control function related data exchange systems is clearly restricted		N/A
	Adequate hardware/software measures are taken to ensure no unauthorized access to the control functions (class B and C; operating data, configuration parameters and/or software modules)		N/A



H.11.12.4 .1.3.3	For class B and class C software revisions the requirements of H.11.12.3 and hardware configuration management are applied and the control maintains its protective functions		N/A
H.11.12.4 .1.4	Remotely actuated control function operation have the duration or limits set before switching on except when automatic switching off is realized at the end of a cycle or the system is designed for permanent operation.		N/A
H.11.12.4 .2	Priority of remotely actuated control functions over control functions does not lead to a hazardous condition.		N/A
H.11.12.4 .3.1	Remote reset action is manually initiated.		N/A
	Reset functionality initiated by a hand-held device required at least two manual actions to activate		N/A
H.11.12.4 .3.2	Reset functions are capable of resetting the system as intended		N/A
H.11.12.4 .3.3	Unintended resets from safe state do not occur.		N/A
H.11.12.4 .3.4	Any fault of the reset function does not cause the control or controlled function to result in a hazardous condition, and was evaluated for its Class B classification		N/A
H.11.12.4 .3.5	For reset functions initiated by manual action not in visible sight of the appliance, the following additional requirements apply:		N/A
	– the actual status and relevant information of the process under control is visible to the user before, during and after the reset action;		N/A
	– the maximum number of reset actions within a time period is declared. Following this, any further reset is denied unless the appliance is physically checked.....		N/A
H.11.12.4 .3.6	The reset function is evaluated on the final application.		N/A
	Manual switching of a thermostat or device with similar function that activates a reset is declared by the manufacturer and is suitable in the final application.....		N/A
H.27.1.2	Protection against internal faults to ensure functional safety		—



H.27.1.2.1	Design and construction requirements		—
H.27.1.2.1.1	Fault avoidance and fault tolerance		—
	Controls incorporating control functions of class B or C are designed according to H.27.1.2 taking into account the failure modes of Cl. H.11.12 for software		P
	Systematic errors are avoided		P
	Random faults are dealt with by a proper system configuration		P
	Functional analysis of the application resulted in a structured design with:		P
	– Control flow		P
	– Data flow		P
	– Time related functions required by the application		P
	For custom-chips special attention was made to minimize systematic errors		N/A
	System configuration was failsafe or:		N/A
	Incorporated components with direct safety-critical functions guarded by safeguards that cause a completely independent safety shut-down in accordance to H.11.12 software class B or C		N/A
	- safeguards are built into hardware and,		N/A
	- safeguards are supplemented by software		N/A
	Time slot monitoring is sensitive to both an upper and a lower limit of the time interval.		N/A
	Faults resulting in a shift of the upper and/or lower limit are taken into account.		N/A
	In a class C control function when a single fault in a primary safeguard can render the safeguard inoperative, a secondary safeguard is provided		N/A
	The reaction time of the secondary safeguard is in accordance with Clause H.27.1.2.3.		N/A
H.27.1.2.1.2	Documentation		—



	The documentation was based on H.11.12.3.2		P
	The functional analysis of the control and the safety related programs under its control are documented in a clear hierarchical way in accordance with the safety philosophy and the program requirements.		P
	Documentation provided for assessment included:		—
	<ul style="list-style-type: none"> A description of the system philosophy, the control flow, data flow and timings. 		P
	<ul style="list-style-type: none"> A clear description of the safety philosophy of the system with all safeguards and safety functions clearly indicated. Sufficient design information is provided to enable the safety functions or safeguards to be assessed 		P
	<ul style="list-style-type: none"> Documentation for any software within the system 		P
	Programming documentation is supplied in a programming design language declared by the manufacturer		P
	Safety related data and safety related segments of the operating sequence are identified and classified according to H.11.12.3		P
	There is a clear relationship between the various parts of the documentation		P
H.27.1.2.2	Class B control function		—
H.27.1.2.2.1	Design and construction requirements		—
	Software complies with software class B		P
H.27.1.2.3	Class C control function		—
H.27.1.2.3.1	Design and construction requirements		—
	Software complies with software class C		N/A
H.27.1.2.5	Circuit and construction evaluation		—
H.27.1.2.5.3	Assessment		N/A



	Only the safety related software (software class B and C) as identified according to H.27.1.2.1.2 were subjected to further assessment		N/A
--	--	--	-----



TABLE R.1 / Table H.1 for software class R.1 / B – GENERAL FAULT / ERROR CONDITIONS

Component ¹⁾	Fault/error	Acceptable measures ^{2) 3) 4)}	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
1. CPU						—
1.1 Register	Stuck at	Functional test, or	H.2.16.5			N/A
		periodic self-test using either:	H.2.16.6			N/A
		– static memory test, or	H.2.19.6			N/A
		– word protection with single bit redundancy	H.2.19.8.2			N/A
1.2 Void						—
1.3 Programme counter	Stuck at	Functional test, or	H.2.16.5			N/A
		periodic self-test, or	H.2.16.6			N/A
		independent time-slot monitoring, or	H.2.18.10.4			N/A
		logical monitoring of the programme sequence	H.2.18.10.2			N/A
2. Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test; or	H.2.16.5			N/A
		time-slot monitoring	H.2.18.10.4			
3. Clock	Wrong frequency (for quartz synchronized clock: harmonics/subharmonics only)	Frequency monitoring, or	H.2.18.10.1	IEC60730B_Library_User_Guide_CM0_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM4_CM7_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM33_v4_2.pdf Revision 4.2		N/A
		time slot monitoring	H.2.18.10.4			N/A
4. Memory						—
4.1 Invariable memory	All single bit faults	Periodic modified checksum; or	H.2.19.3.1	IEC60730B_Library_User_Guide_CM0_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM4_CM7_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM33_v4_2.pdf Revision 4.2		P
		multiple checksum, or	H.2.19.3.2			N/A
		word protection	H.2.19.8.2			N/A



		with single bit redundancy				
4.2 Variable memory	DC fault	Periodic static memory test, or	H.2.19.6			N/A
		word protection with single bit redundancy	H.2.19.8.2			N/A
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit parity including the address	H.2.19.18.2			N/A
5. Internal data path	Communication interface					—
5.1 Data	Stuck at	Word protection with single bit redundancy	H.2.19.8.2			N/A
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
6 External communication	Communication interface not safety relevant					—
6.1 Data	Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single word, or	H.2.19.8.1 H.2.19.4.1			N/A
		transfer redundancy, or	H.2.18.2.2			N/A
		protocol test	H.2.18.14			N/A
6.2 Void						—
6.3 Timing	Wrong point in time	Time-slot monitoring, or scheduled transmission	H.2.18.10.4 H.2.18.18			N/A
		Time-slot and logical monitoring, or	H.2.18.10.3			N/A
		comparison of redundant communication channels by either:				—
		– reciprocal comparison	H.2.18.15			N/A
		– independent hardware comparator	H.2.18.3			N/A
	Wrong sequence	Logical monitoring, or	H.2.18.10.2			N/A
		time-slot monitoring, or	H.2.18.10.4			N/A
scheduled transmission (same options as for wrong point in time)		H.2.18.18			N/A	



7. Input/output						—
7.1 Digital I/O	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13	IEC60730B_Library_User_Guide_CM0_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM4_CM7_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM33_v4_2.pdf Revision 4.2	P	
7.2 Analog I/O						
7.2.1 A/D- and D/A-converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13	IEC60730B_Library_User_Guide_CM0_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM4_CM7_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM33_v4_2.pdf Revision 4.2	P	
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13	IEC60730B_Library_User_Guide_CM0_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM4_CM7_v4_2.pdf Revision 4.2 IEC60730B_Library_User_Guide_CM33_v4_2.pdf Revision 4.2	P	
8. Void						—
9 Custom chips. ASIC, GAL, Gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6		N/A	

Additional measures	Details	Reference
Watch-Dog reset and Watch-Dog clock test	Functional test after power on reset for reset execution and timing	IEC60730B_Library_User_Guide_CM0_v4_2.pdf IEC60730B_Library_User_Guide_CM4_CM7_v4_2.pdf IEC60730B_Library_User_Guide_CM33_v4_2.pdf iec60730b_wdog.c / use in all devices

Remarks: files can be used for all devices, file available as source code, not part of object code



Supplementary information:

The self-diagnostic routines mentioned below are foreseen for following measures of table R.1 / H.1:

File Name	Measure	To be used in
iec60730b_clock.c	3.0 Clock	all devices
iec60730b_invariable_memory.c	4.1 Invariable memory	devices with HW CRC module
iec60730b_dio.c iec60730b_dio_ext.c	7.1 Digital I/O (for output mode only)	all devices
iec60730b_aio.c	7.2.1 A/D- and D/A- converter	all devices, except MIMX8MNxx, MIMX8MMxx
iec60730b_tsi.c	7.2.1 A/D- and D/A- converter	MKE 1xZ only

Remark: */*

Photo documentation:

For photo documentation see VDE folders:

- 5016540-4970-0002 for devices with ARM CM4 or CM7 core with its actual test report.
- 5016540-4970-0004 for devices with ARM CM0+ core with its actual test report.
- 5016540-4970-0005 for devices with ARM CM33 core with its actual test report.

Testing and measuring equipment:

For testing and measuring equipment see VDE folders:

- 5016540-4970-0002 for devices with ARM CM4 or CM7 core with its actual test report.
- 5016540-4970-0004 for devices with ARM CM0+ core with its actual test report.
- 5016540-4970-0005 for devices with ARM CM33 core with its actual test report.

And:

IAR C/C++ Compiler for ARM Software	9.10.2.313
IAR Assembler for ARM	9.10.2.313
IAR ELF Linker for ARM	9.10.2.313
J-Link Software and Documentation Pack	v6.54c

Internal testing tools
Hardware
J-Link Base

Board name	Revision	Family mask
LPCXpresso55S36	VERSION 1	LPC55xx, LPC55Sxx
FRDM-KW36	REV A1	KW3x

Uncertainty of measurement (optional according to sub-clause 7.8.3.1 c) of IEC 17025):

Statement concerning the uncertainty of the measurement systems used for the tests

Report No.:	287890-TL2-1	Page	26	of	27
-------------	--------------	------	----	----	----



(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Statement not required by the standard used for type testing

(Note: When IEC or ISO standard requires a statement concerning the uncertainty of the measurement systems used for tests, this should be reported above. The informative text in parenthesis should be delete in both cases after selecting the applicable option)

End of Test Report